



20

26

superior.

Table of contents

e-MTB full-suspension	27
eXF.....	29
iXF	34
e-MTB hardtail	39
eXP	41
iXP	46
iXR.....	47
e-TOUR	49
eBLOX.....	51
CITY e-bikes	63
eFARAD	65
eWAY	68
eMOVE	79
MTB full-suspension	83
XF TEAM	85
XF RC.....	87
XF DC.....	90
MTB hardtail	93
XP.....	95
XC.....	110
ROAD & GRAVEL	135
RR.....	137
XR GF.....	149
XR GR	155
GA.....	164
TREKKING & CITY	167
BLOX.....	169
JUNIOR	185
TEAM.....	187
F.L.Y.	195
RACER	211



Born in Racing. **Built in the Czech Republic.**

Superior has been pushing limits for over 30 years. Born and built in the Czech Republic, our bikes are developed and produced in the BikeFun International.

From early partnerships with legends like Bart Brentjens, through years of World Cup wins with jb BRUNEX Superior Factory Racing, to today's collaboration with Olympic champion Jaroslav Kulhavý—racing is in our DNA. That experience drives every frame we make.

superior.



Driven by Purpose.
Designed for Performance.

Our mission is simple: to create high-performance bikes that are accessible to more riders. We develop every model in-house to deliver the best possible ride experience. Premium feel. Honest value.


superior.

Speed, lightness, and purity – this is the spirit of the Superior brand. We put these three values into every model we create. Our bikes are designed in-house, tested in real-world conditions, and built with attention to every detail. Backed by racing experience, smart engineering, and honest craftsmanship – that’s what makes Superior the right choice. Whether it’s race bikes, e-bikes, or city commuters – the same values apply across the range.

The Spirit in Every Bike



superior.

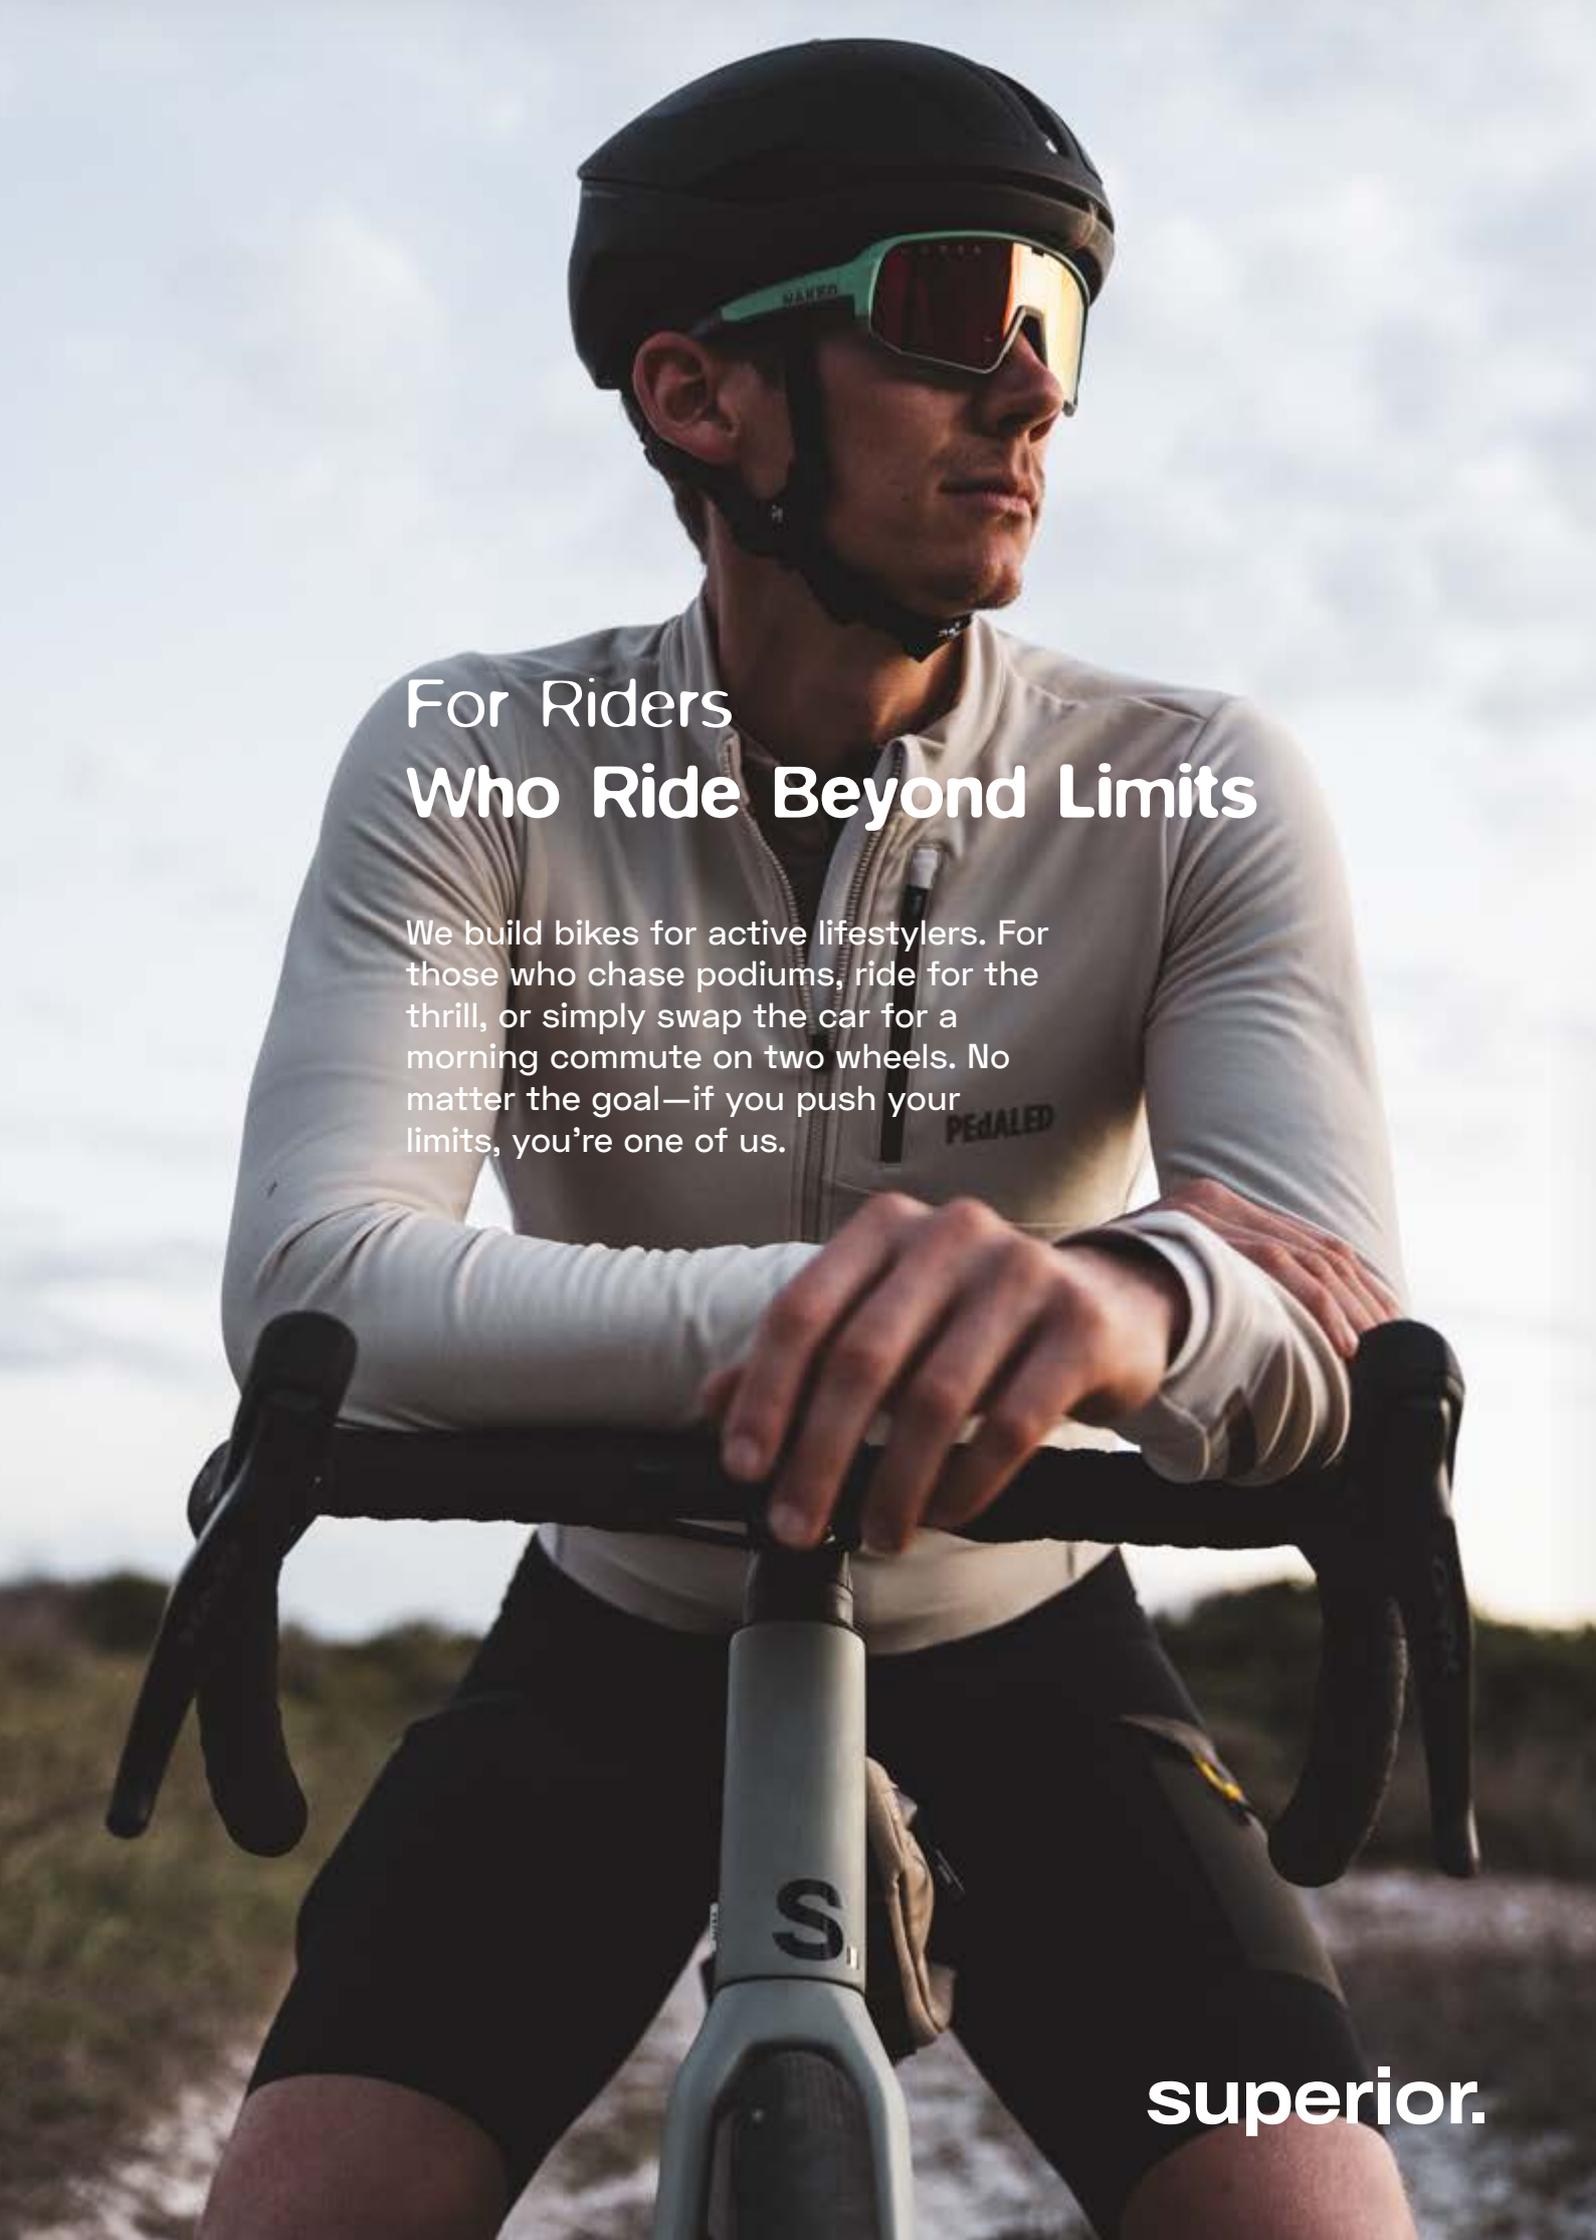

For Riders Who Ride Beyond Limits

We build bikes for active lifestyles. For those who chase podiums, ride for the thrill, or simply swap the car for a morning commute on two wheels. No matter the goal—if you push your limits, you're one of us.

superior.



More power. Same pure ride.

We bring the same passion and attention to detail from our performance bikes into every e-bike we build. Years of experience in high-end bike design allow us to create electric bikes that are fast, light, and built to perform.

From full-suspension carbon iLIGHT that conquer the toughest trails to smart trekking and commuter bikes that improve everyday city mobility. Superior e-bikes are more than just tech. They're freedom on two wheels. Discover our full range of e-bikes and take your ride to the next level.

superior.

Support That Moves With You

Superior is more than just bikes. We're a partner that helps you grow—whether it's your business or your riding experience. You can count on support built on quality, efficiency, and a personal approach.



Marketing Support:

We deliver professional 360-degree photography, lifestyle content, and engaging bike-check videos. Visuals that sell. A brand that speaks.



Advanced IT Integration:

Automated API feeds provide up-to-date product specs, descriptions, and stock insights—reliably and in real-time.



Personalized Customer Service:

Our back-office team is here to help. Fast, flexible, and ready to meet your specific needs.



Efficient B2B Platform:

Quick access to orders, invoices, claims, and marketing materials—everything in one place, exactly when you need it.



Flexible Financial Solutions:

We offer tailored payment terms to match your business needs, in cooperation with trusted partners.



Quality Assurance:

Our dedicated QC teams ensure precision at every step. E-bike diagnostic tools and professional service support are part of the package.



Optimized Logistics:

Our logistic hub, integrated planning system, and global offices in China and Taiwan keep things moving—fast and reliably.



Eco-Friendly Packaging:

No plastic. 95% pre-assembled bikes for faster setup. A cleaner choice for the planet—and for you.

superior.




Jaroslav Kulhavy
Olympic Champion, World
Champion, and World Cup
winner in XCO



Tereza Hurikova
Olympian, Former World
Champion

Brand Ambassadors

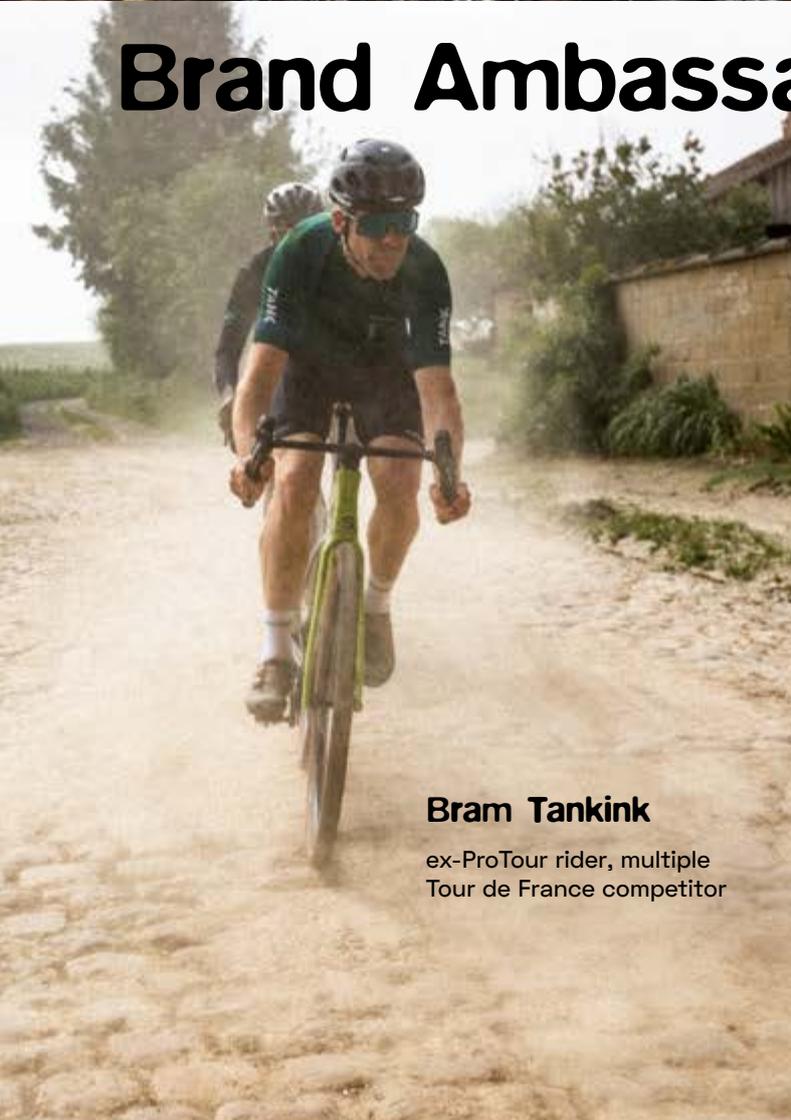

Bram Tankink
ex-ProTour rider, multiple
Tour de France competitor



Gabriela Wojtyla
Multiple Polish National
Champion XCO/XCC

superior.

Model Nomenclature Principles

FRAME MATERIAL

9

Carbon

6

Aluminium

COMPONENTS QUALITY

.9

Top Level



.1

Entry Level

E-BIKE CATEGORY

e

Power e-bikes

i

Light e-bikes

USAGE

Team

Team Models

RC

Race

DC

Down Country

GF

Gran Fondo

GR

Gravel

GRA

Gravel Adventure

T

Touring

MS

Mid-Step

LS

Low-Step

B

Bosch

VB

V-Brakes

EXAMPLE

XF

Aluminium

9

Frame
Material

.9

Components
Quality

Team

Usage

superior.

superior.



New geometry. New design. A whole new level of alloy.

Superior introduces a brand-new generation of aluminum bikes – XP, XC, and Junior – completely redesigned from the ground up to deliver better handling, lower weight, and a clean, modern look. Each platform features a fully updated geometry, giving the bikes a more confident, agile, and natural ride feel – whether you’re heading for the trails, bike paths, or school runs.

The XP frames have been optimized to shed 250 grams while keeping their sporty character and high stiffness. The XC models come with a new, more upright geometry and a sleeker frame design – perfect for all-round use. For our Junior bikes, we’ve introduced Triple Butted aluminum tubing, cutting weight and making the bikes noticeably easier to handle for young riders.

All frames across the lineup share a modern design inspired by our carbon range, with fully internal cable routing, mounting points for accessories, and a clear focus on real-world performance. The result? A smart bike for every rider – uncompromising, stylish, and delivering outstanding value.



XP Series – Race-Ready Hardtails

Fast, precise, and built to perform.

The XP series is made for riders who want a sharp-handling hardtail with race-inspired DNA and unbeatable value. This new generation borrows key elements from our carbon XC range – including a matching frame design, updated geometry, fully internal cable routing, UDH dropout, and Boost rear spacing.

Frame optimization has resulted in a 250 g weight saving, translating to quicker acceleration and more responsive handling on the trail. Paired with 120 mm of front travel, powerful hydraulic brakes, and 12-speed drivetrains from Shimano Deore, SLX, or XT (depending on the model), the XP is ready to push your limits.

With frame sizes ranging from XS to XXL, there's a perfect fit for every rider – whether you're out for weekend miles or chasing your personal best on singletrack.



- **Modern Cross-Country Geometry**

Inspired by contemporary XC race bikes, the frame is longer, lower, and more stable. The result is greater confidence on descents and more efficient power transfer on climbs.

- **Carbon XP-Inspired Frame Design**

The aluminum XP models adopt the sharp lines and aggressive silhouette of our top-tier carbon bikes. This gives even the more affordable models a sleek, high-performance look and feel.



- **UDH Dropout – Universal Compatibility**

The frame features SRAM's Universal Derailleur Hanger (UDH), ensuring full compatibility with current and future drivetrain standards. It's easy to replace, widely available, and designed to protect your derailleur in case of impact.



- **Internal Cable Routing**

All cables run neatly inside the frame, giving the bike a clean, streamlined look.



- **250 g Lighter Frame – More Speed, Less Effort**

Compared to the previous generation, the optimized frame design saves a full 250 grams. Less weight means quicker acceleration and more agile handling on technical trails.

- **High Stiffness, Sharp Looks – Built for Ambitious Riders**

The frame delivers excellent stiffness where it matters, holding its line under hard pedaling and aggressive cornering. It's the perfect choice for riders looking to push their limits and ride with confidence.



XC Series – Comfort Meets Control

More comfort. Better control. A smoother ride.

The XC series is designed for riders who want a versatile mountain bike for everyday adventures – from weekend trail rides to fast commutes. The new generation features a completely reworked geometry that offers a more stable, upright, and relaxed riding position, ideal even for less experienced or older riders.

While inspired by the sporty look of our carbon XP line, the XC frames are tuned for all-day comfort and real-world practicality. There's built-in compatibility for touring essentials like racks, fenders, and kickstands, plus fully internal cable routing for a clean finish. Selected models also come in a women's-specific version, featuring a lower top tube for easier mounting and improved confidence on the bike.

The XC lineup is the perfect choice for riders seeking a well-balanced hardtail – comfortable, capable, and ready for anything.

- **New Geometry for a Confident, Comfortable Ride**

The frame is designed to offer a relaxed, upright riding position that feels natural even for less experienced riders. It enhances stability and control across mixed terrain, making every ride feel more secure.

- **Upright Riding Position – More Comfort, Less Strain**

A higher cockpit reduces pressure on the back, shoulders, and wrists – especially appreciated on longer rides. It also improves low-speed handling, making the bike easier to control in tight spaces or technical terrain.

- **XP-Inspired Frame Design – Sporty Looks, Everyday Comfort**

Although tuned for comfort, the XC frame keeps a sharp, performance-driven aesthetic. Slim tubing, clean welds, and modern color schemes give it a fresh, fast look.

- **Touring-Ready Frame – Mounts for Racks, Kickstand, and Fenders**

The frame is fully equipped for daily use or light bikepacking adventures. Add your gear with ease and turn your XC into a versatile all-rounder.



1. Internal Cable Routing – Clean and Protected

All cables run inside the frame, giving the bike a sleeker appearance and protecting them from dirt or damage. No cable rattle, no snags – just a smooth, quiet ride.

2. Shimano Drivetrain & Hubs – Reliable, Serviceable, Global

Every XC model runs full Shimano components for unmatched reliability and ease of maintenance. Parts are widely available worldwide, making servicing or upgrading simple and stress-free.

3. Air Suspension Fork – Smooth, Light, Adjustable

Air forks offer better sensitivity and lower weight than coil options. They're easy to adjust to the rider's weight, improving comfort and control (standard on XC 6.9 / 6.5 / 6.2).

4. Women's-Specific Geometry – Easy Mounting, More Comfort

Select models are available in women's versions with a lowered top tube. It makes mounting easier and improves confidence both on trails and around town.

5. Selle Royal Comfort Saddles – Ride All Day, No Problem

We've spec'd Selle Royal saddles across the XC line for maximum comfort. Ideal for long-distance adventures and everyday rides alike.



Junior Series – Built for Young Riders

Lightweight. Smart. Fun to ride.

Superior's kids and junior bikes are built with the same care and attention as our adult models – from lightweight frames to fine-tuned geometry that ensures safe, confident handling. This new generation brings a serious leap forward: updated geometries tailored to real children's proportions, optimized frame construction for reduced weight, and Triple Butted aluminum tubing on selected models for maximum efficiency.

All bikes feature a lower standover height, making it easier to get on and off while giving kids more confidence during their first rides. Ergonomically shaped grips, shorter cranks, and kid-specific gearing support natural pedaling and help build proper riding habits from the start. The result is a lightweight, functional, and reliable bike that kids love to ride – and parents can trust for its smart design and build quality.



TEAM – Junior Bikes with Pro-Level Performance

The TEAM series is built for experienced young riders and junior racers. These bikes pack adult-level MTB tech into junior-sized frames – including air suspension forks, tubeless-ready rims, hydraulic disc brakes, and the latest Shimano CUES drivetrains. TEAM models feature our most progressive geometry and now come with Triple Butted alloy frames, making them exceptionally light, stiff, and race-ready. Available in 20”, 24”, and 27.5” wheel sizes.



F.L.Y. – Lightweight That Lets Them Soar

The F.L.Y. series is all about simplicity and low weight. These bikes are extremely light, easy to control, and carefully tailored to fit young riders’ ergonomics. The lineup includes V-brake versions for smaller kids, as well as disc brake models with larger wheels for growing riders. Available in 20”, 24”, and 27.5” sizes.




RACER – Their First Real MTB with a Sporty Soul

The RACER models offer eye-catching design, intuitive handling, and reliable spec for kids who want more than just a basic bike. The frames feature progressive geometry, lightweight alloy construction, and trusted Shimano components. Selected models come with suspension forks and wider tires for added comfort and control. Perfect for everyday rides, yet ready for forest trails and weekend adventures. Available in 20”, 24”, and 27.5” sizes.



Age-Adjusted Geometry and Ergonomics

Each frame size is designed around real-world child proportions – not just scaled-down adult bikes. The result is better control, more confidence, and a natural riding position from the very first pedal strokes.

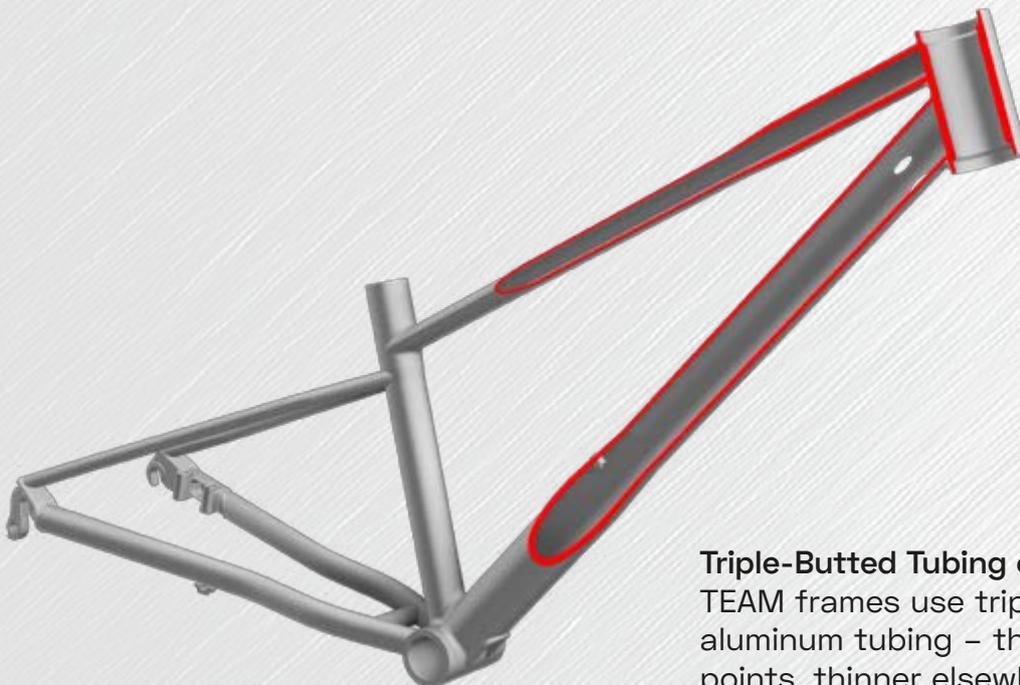

Triple-Butted Tubing on TEAM Models

TEAM frames use triple-butted aluminum tubing – thicker at stress points, thinner elsewhere to save weight. This brings race-level efficiency and a lightweight feel to junior riders.



1. Low Weight – A Bike They Can Truly Handle

With optimized frames and lightweight components, our kids' bikes rank among the lightest in their class. That means easier handling, faster adaptation, and way more fun on every ride.

2. Shorter Cranks – Natural Pedaling, Better Cadence

Crank length is tailored to kids' leg length, making pedaling more efficient and less tiring. It helps young riders develop proper rhythm and technique right from the start.

3. Slimmer Grips and Bars – Confidence in Small Hands

Narrow handlebars and thinner grips fit smaller hands better. That improves control, reduces fatigue, and builds confidence on every ride.

4. Kid-Optimized Gearing – Easy, Smooth, Intuitive

The gear range is tuned for lower rider weight and strength. Kids can pedal smoothly and easily – no frustration, just pure riding joy.

5. Low Standover and Center of Gravity – Stable and Easy to Control

The lowered top tube helps kids mount and dismount with ease. A lower center of gravity boosts balance, especially at low speeds or on uneven ground.

6. Smart Specs by Skill Level – From V-Brakes to Full MTB

Each bike line offers multiple spec levels – from lightweight V-brake models to full-featured MTBs with disc brakes and air suspension. There's something for every young rider.



e-MTB full-suspension

eXF / iXF

Full-suspension e-MTBs combine two forces: powerful models with high-capacity batteries and strong Bosch motors for long, demanding rides, and ultra-light iXF models with carbon frames, compact drive units, and agile geometry.

eXF 9049 B

Gloss Olive Metallic / Black

eMTB FULL SUSPENSION / eXF



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842183857	
17.5" (M)	8592842183864	
19" (L)	8592842183871	
21" (XL)	8592842183888	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 750Wh, Smart System
DISTANCE	200km
MAX. TORQUE	85Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	25.60 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 4 For rough Off-Road riding and jumps less than 120cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line CX, 85Nm
CHARGER	BOSCH 4A
BATTERY	BOSCH PowerTube, 750Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SUE03-CXBES3, Alu X6 Ultralite MTB Trail, Advanced e-MTB Geometry, Travel 160/140 mm, BOSCH CX Performance 5G ready, Integrated battery up to 750Wh, 3D alloy one piece link, Alloy swingarm, Boost 12x148 mm, Inner cable routing, Dropped seat post ready
SUSPENSION FORK	DT Swiss F535, Tapered, 15x110mm axle, 160mm travel
REAR SHOCK	DT Swiss R535, size 230x65mm, OL
HEADSET	ACROS AZX-1051S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE XT SL-M8100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8100, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO XT M8120, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO RT-MT800, 180mm
BRAKE REAR	SHIMANO XT M8120, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO RT-MT800, 180mm

WHEELS

WHEELSET FRONT	DT Swiss H 1900 SPLINE®, CL, 15x110mm, Tubeless Ready
WHEELSET REAR	DT Swiss H 1900 SPLINE®, CL, 12x148mm, SH12, Tubeless Ready
TIRE FRONT	Schwalbe Nobby Nic Evo, SuperTrail, TL-Easy, 29x2.60", ADDIX SpeedGrip
TIRE REAR	Schwalbe Nobby Nic Evo, SuperTrail, TL-Easy, 29x2.60", ADDIX SpeedGrip

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 12mm rise, 35mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizik Aidon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-904A, 34.9mm, Full CNC machined, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	27	27	27	27
SEAT TUBE LENGTH (MM)	393	420	440	490
EFFECTIVE TOP TUBE LENGTH (MM)	598	610	630	650
STACK HEIGHT (MM)	625	625	625	625
REACH (MM)	465	465	485	505
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	64°	64°	64°	64°
REAR CENTER (MM)	446	446	446	446
HEAD TUBE LENGTH (MM)	120	120	120	120
WHEELBASE (MM)	1251	1251	1271	1291
STEM (MM)	35	50	50	50
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	L390/T125	L440/T150	L480/T170	L480/T170

eXF 9019 B

Gloss Copper / Black

eMTB FULL SUSPENSION / eXF



FRAME SIZE	EAN	Quantity
17.5" (M)	8592842183949	
19" (L)	8592842183956	
21" (XL)	8592842183963	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 625Wh, Smart System
DISTANCE	150km
MAX. TORQUE	85Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	25.70 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 4 For rough Off-Road riding and jumps less than 120cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line CX, 85Nm
CHARGER	BOSCH 4A
BATTERY	BOSCH PowerTube, 625Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SUE03-CXBES3, Alu X6 Ultralite MTB Trail, Advanced e-MTB Geometry, Travel 160/140 mm, BOSCH CX Performance 5G ready, Integrated battery up to 750Wh, 3D alloy one piece link, Alloy swingarm, Boost 12x148 mm, Inner cable routing, Dropped seat post ready
SUSPENSION FORK	RockShox 35 Silver TK, Tapered, SoloAir, 15x110mm axle, 160mm travel
REAR SHOCK	RockShox Super Deluxe Select R, size 230x65mm
HEADSET	ACROS AZX-1051S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	S802, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 180mm

WHEELS

HUB FRONT	SHIMANO HB-MT410-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Nobby Nic Performance, 29x2.60", ADDIX
HUB REAR	SHIMANO FH-MT410-B, 32H, CL, 12x148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Nobby Nic Performance, 29x2.60", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 12mm rise, 35mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizik Aidon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-904A, 34.9mm, Full CNC machined, Black

GEOMETRY

FRAME SIZE	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	27	27	27
SEAT TUBE LENGTH (MM)	420	440	490
EFFECTIVE TOP TUBE LENGTH (MM)	610	630	650
STACK HEIGHT (MM)	625	625	625
REACH (MM)	465	485	505
SEAT TUBE ANGLE	77°	77°	77°
HEAD TUBE ANGLE	64°	64°	64°
REAR CENTER (MM)	446	446	446
HEAD TUBE LENGTH (MM)	120	120	120
WHEELBASE (MM)	1251	1271	1291
STEM (MM)	50	50	50
HANDLEBAR (MM)	760	760	760
CRANKSET (MM)	165	165	170
SEATPOST (MM)	L440/T150	L480/T170	L480/T170

eXF 8089 B

Gloss Chrome / Black

eMTB FULL SUSPENSION / eXF



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842183970	
17.5" (M)	8592842183987	
19" (L)	8592842183994	
21" (XL)	8592842184007	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 625Wh, Smart System
DISTANCE	150km
MAX. TORQUE	85Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	25.15 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 4 For rough Off-Road riding and jumps less than 120cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line CX, 85Nm
CHARGER	BOSCH 4A
BATTERY	BOSCH PowerTube, 625Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SUE03-CXBES3, Alu X6 Ultralite MTB Trail, Advanced e-MTB Geometry, Travel 160/140 mm, BOSCH CX Performance 5G ready, Integrated battery up to 750Wh, 3D alloy one piece link, Alloy swingarm, Boost 12x148 mm, Inner cable routing, Dropped seat post ready
SUSPENSION FORK	RockShox 35 Silver TK, Tapered, SoloAir, 15x110mm axle, 160mm travel
REAR SHOCK	RockShox Deluxe Select R, size 230x65mm
HEADSET	ACROS AZX-1051, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 180mm

WHEELS

HUB FRONT	SHIMANO HB-MT410-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Nobby Nic Performance, 29x2.60
HUB REAR	SHIMANO FH-MT410-B, 32H, CL, 12x148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Nobby Nic Performance, 29x2.60
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 12mm rise, 35mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Race, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-617, 34.9mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	27	27	27	27
SEAT TUBE LENGTH (MM)	393	420	440	490
EFFECTIVE TOP TUBE LENGTH (MM)	598	610	630	650
STACK HEIGHT (MM)	625	625	625	625
REACH (MM)	465	465	485	505
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	64°	64°	64°	64°
REAR CENTER (MM)	446	446	446	446
HEAD TUBE LENGTH (MM)	120	120	120	120
WHEELBASE (MM)	1251	1251	1271	1291
STEM (MM)	35	50	50	50
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	400	400	400	400

eXF 8089 B SUV

eMTB FULL SUSPENSION / eXF

Gloss Black / Black



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842184014	
17.5" (M)	8592842184021	
19" (L)	8592842184038	
21" (XL)	8592842184045	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 625Wh, Smart System
DISTANCE	150km
MAX. TORQUE	85Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	28.50 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line CX, 85Nm
CHARGER	BOSCH 4A
BATTERY	BOSCH PowerTube, 625Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SUE03-CXBES3, Alu X6 Ultralite MTB Trail, Advanced e-MTB Geometry, Travel 160/140 mm, BOSCH CX Performance 5G ready, Integrated battery up to 750Wh, 3D alloy one piece link, Alloy swingarm, Boost 12x148 mm, Inner cable routing, Dropped seat post ready
SUSPENSION FORK	RockShox 35 Silver TK, Tapered, SoloAir, 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select R, size 230x57.5mm
HEADSET	ACROS AZX-1051, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 180mm

WHEELS

HUB FRONT	SHIMANO HB-MT410-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Johnny Watts Performance, 29x2.35", ADDIX
HUB REAR	SHIMANO FH-MT410-B, 32H, CL, 12x148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Johnny Watts Performance, 29x2.35", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 31.8mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Race, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-617, 34.9mm, with Quick Release level, Black

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	AXA Juno
FENDER	Alloy

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	27	27	27	27
SEAT TUBE LENGTH (MM)	393	420	440	490
EFFECTIVE TOP TUBE LENGTH (MM)	598	610	630	650
STACK HEIGHT (MM)	625	625	625	625
REACH (MM)	465	465	485	505
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	64°	64°	64°	64°
REAR CENTER (MM)	446	446	446	446
HEAD TUBE LENGTH (MM)	120	120	120	120
WHEELBASE (MM)	1251	1251	1271	1291
STEM (MM)	60	60	60	80
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	160	160	160	165
SEATPOST (MM)	400	400	400	400

eXF 8069 B SUV

eMTB FULL SUSPENSION / eXF

Gloss Petrol / Black



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842184052	
17.5" (M)	8592842184069	
19" (L)	8592842184076	
21" (XL)	8592842184083	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 500Wh, Smart System
DISTANCE	150km
MAX. TORQUE	85Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	28.55 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line CX, 85Nm
CHARGER	BOSCH 4A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SUE03-CXBES3, Alu X6 Ultralite MTB Trail, Advanced e-MTB Geometry, Travel 160/140 mm, BOSCH CX Performance 5G ready, Integrated battery up to 750Wh, 3D alloy one piece link, Alloy swingarm, Boost 12x148 mm, Inner cable routing, Dropped seat post ready
SUSPENSION FORK	RST Blade, 1.5", 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select R, size 230x57.5mm
HEADSET	ACROS AZX-1051, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M5100-IR, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M5100, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T
CASSETTE	SHIMANO DEORE CS-M5100, 11-speed, 11-51T
CHAIN	KMC e11T

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 180mm

WHEELS

HUB FRONT	SHIMANO HB-MT410-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Johnny Watts Performance, 29x2.35", ADDIX
HUB REAR	SHIMANO FH-MT400-B, 32H, CL, 12x148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Johnny Watts Performance, 29x2.35", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 31.8mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Race, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-617, 34.9mm, with Quick Release level, Black

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	AXA Blueline
FENDER	Alloy

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	27	27	27	27
SEAT TUBE LENGTH (MM)	393	420	440	490
EFFECTIVE TOP TUBE LENGTH (MM)	598	610	630	650
STACK HEIGHT (MM)	625	625	625	625
REACH (MM)	465	465	485	505
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	64°	64°	64°	64°
REAR CENTER (MM)	446	446	446	446
HEAD TUBE LENGTH (MM)	120	120	120	120
WHEELBASE (MM)	1251	1251	1271	1291
STEM (MM)	60	60	60	80
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	160	160	160	165
SEATPOST (MM)	400	400	400	400

iXF 9.8

Matte Berry Carbon

iMTB FULL SUSPENSION | Light / iXF



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842202107	
17.5" (M)	8592842202114	
19" (L)	8592842202121	
21" (XL)	8592842202138	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	17.65 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 60Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E10-01, Carbon MTB DC; Advanced Down Country Geometry, Travel 140 mm, Integrated Cable routing, BB92, 3D one piece link, Carbon swingarm, UDH dropout, Boost Thru Axle 148x12 mm, Dropped seat post ready
SUSPENSION FORK	DT Swiss F535, Tapered, 15x110mm axle, 150mm travel
REAR SHOCK	DT Swiss R535, size 210x55mm, OL
HEADSET	ACROS AZX-596R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SRAM AXS POD, 12-speed
REAR DERAILLEUR	SRAM X0 EAGLE AXS T-Type
CRANKSET	SRAM X0, BOSCH
CHAINRING	SRAM T-TYPE, 36T
CASSETTE	SRAM X0 XS-1295, 12-speed, T-Type, 10-52T
CHAIN	SRAM X0, T-Type

BRAKING SYSTEM

BRAKE FRONT	SRAM LEVEL SILVER STEALTH, 4 piston, hydraulic disc brake
ROTOR FRONT	SRAM HS2, 180mm
BRAKE REAR	SRAM LEVEL SILVER STEALTH, 4 piston, hydraulic disc brake
ROTOR REAR	SRAM HS2, 180mm

WHEELS

WHEELSET FRONT	DT Swiss Hybrid MTB HXC 1501 SPLINE®, Carbon, CL, 15x110mm, Tubeless Ready
WHEELSET REAR	DT Swiss Hybrid MTB HXC 1501 SPLINE®, Carbon, CL, 12x148mm, SRAM XD, Tubeless Ready
TIRE FRONT	Schwalbe Wicked Will Evo, SuperGround, TL-Easy, 29x2.40", ADDIX SpeedGrip
TIRE REAR	Schwalbe Wicked Will Evo, SuperGround, TL-Easy, 29x2.40", ADDIX SpeedGrip

COCKPIT

HANDLEBAR	ONE Carbon Integrated Cockpit ICR
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizi:k Aidon X5, Alloy
SEATPOST LEVER	SRAM AXS POD, Dropper Post Lever
SEATPOST	SRAM Reverb AXS dropper post, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	32	32	32	32
SEAT TUBE LENGTH (MM)	393	420	440	460
EFFECTIVE TOP TUBE LENGTH (MM)	574	590	625	652
STACK HEIGHT (MM)	606	605	636	645
REACH (MM)	450	465	490	515
SEAT TUBE ANGLE	78°	78°	78°	78°
HEAD TUBE ANGLE	64,5°	64,5°	64,5°	64,5°
REAR CENTER (MM)	450	450	450	450
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1223	1239	1274	1301
HANDLEBAR (MM)	760/40	760/40	760/60	760/60
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	L390/T125	L440/T150	L480/T170	L480/T170

iXF 9.7

Gloss Chrome / Matte Carbon

iMTB FULL SUSPENSION | Light / iXF



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842215770	
17.5" (M)	8592842215787	
19" (L)	8592842215794	
21" (XL)	8592842215800	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	18.85 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E10-01, Carbon MTB DC; Advanced Down Country Geometry, Travel 140 mm, Integrated Cable routing, BB92, 3D one piece link, Carbon swingarm, UDH dropout, Boost Thru Axle 148x12 mm, Dropped seat post ready
SUSPENSION FORK	RockShox PIKE Base Rush RC, Tapered, DebonAir+, 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select+ RT, size 210x55mm
HEADSET	ACROS AZX-327R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SW-M6250-IR, Di2, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8260-12, Wired
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO XT M8220, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 180mm
BRAKE REAR	SHIMANO XT M8220, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 180mm

WHEELS

WHEELSET FRONT	DT Swiss Hybrid MTB H 1900 SPLINE®, CL, 15x110mm, Tubeless Ready
WHEELSET REAR	DT Swiss Hybrid MTB H 1900 SPLINE®, CL, 12x148mm, SH12, Tubeless Ready
TIRE FRONT	Schwalbe Wicked Will Evo, SuperGround, TL-Easy, 29x2.40", ADDIX SpeedGrip
TIRE REAR	Schwalbe Wicked Will Evo, SuperGround, TL-Easy, 29x2.40", ADDIX SpeedGrip

COCKPIT

STEM	ONE Race, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 35mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizik Aidon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	32	32	32	32
SEAT TUBE LENGTH (MM)	393	420	440	460
EFFECTIVE TOP TUBE LENGTH (MM)	574	590	625	652
STACK HEIGHT (MM)	606	605	636	645
REACH (MM)	450	465	490	515
SEAT TUBE ANGLE	78°	78°	78°	78°
HEAD TUBE ANGLE	64,5°	64,5°	64,5°	64,5°
REAR CENTER (MM)	450	450	450	450
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1223	1239	1274	1301
STEM (MM)	45	45	45	45
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	L408/T125	L458/T150	L500/T170	L500/T170

iXF 9.2

Gloss Grey

iMTB FULL SUSPENSION | Light / iXF



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842215817	
17.5" (M)	8592842215824	
19" (L)	8592842215831	
21" (XL)	8592842215848	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	19.30 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E10-01, Carbon MTB DC; Advanced Down Country Geometry, Travel 140 mm, Integrated Cable routing, BB92, 3D one piece link, Carbon swingarm, UDH dropout, Boost Thru Axle 148x12 mm, Dropped seat post ready
SUSPENSION FORK	RockShox PSYLO Silver RC, Tapered, SoloAir, 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select+ RT, size 210x55mm
HEADSET	ACROS AZX-327R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 35mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizik Aidon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	32	32	32	32
SEAT TUBE LENGTH (MM)	393	420	440	460
EFFECTIVE TOP TUBE LENGTH (MM)	574	590	625	652
STACK HEIGHT (MM)	606	605	636	645
REACH (MM)	450	465	490	515
SEAT TUBE ANGLE	78°	78°	78°	78°
HEAD TUBE ANGLE	64,5°	64,5°	64,5°	64,5°
REAR CENTER (MM)	450	450	450	450
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1223	1239	1274	1301
STEM (MM)	45	45	45	45
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	L408/T125	L458/T150	L500/T170	L500/T170

iXF 9.2

Gloss Teal / Teal Carbon

iMTB FULL SUSPENSION | Light / iXF



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842215855	
17.5" (M)	8592842215862	
19" (L)	8592842215879	
21" (XL)	8592842215886	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	19.30 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E10-01, Carbon MTB DC; Advanced Down Country Geometry, Travel 140 mm, Integrated Cable routing, BB92, 3D one piece link, Carbon swingarm, UDH dropout, Boost Thru Axle 148x12 mm, Dropped seat post ready
SUSPENSION FORK	RockShox PSYLO Silver RC, Tapered, SoloAir, 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select+ RT, size 210x55mm
HEADSET	ACROS AZX-327R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 35mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizik Aidon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	32	32	32	32
SEAT TUBE LENGTH (MM)	393	420	440	460
EFFECTIVE TOP TUBE LENGTH (MM)	574	590	625	652
STACK HEIGHT (MM)	606	605	636	645
REACH (MM)	450	465	490	515
SEAT TUBE ANGLE	78°	78°	78°	78°
HEAD TUBE ANGLE	64,5°	64,5°	64,5°	64,5°
REAR CENTER (MM)	450	450	450	450
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1223	1239	1274	1301
STEM (MM)	45	45	45	45
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	L408/T125	L458/T150	L500/T170	L500/T170



e-MTB hardtail

eXP / iXP / iXR

Superior hardtail and gravel e-bikes strike the perfect balance between power and lightness. From the strong and capable eXP to the agile iXP and sleek iXR, each model offers a unique blend of Bosch support, clean design, and versatility for everyday rides, touring, or light adventure.



eXP 6.5

Matte Dark Chrome / Black

eMTB HARDTAIL / eXP



FRAME SIZE	EAN	Quantity
15,5" (S)	8592842216357	
17,5" (M)	8592842216364	
19" (L)	8592842216371	
21" (XL)	8592842216388	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	150km
MAX. TORQUE	100Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	23.10 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance CX, 100Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SU-E40-01, Alu X6 Ultralite, Advanced eMTB Geometry, Integrated battery, SR dropout, Boost 12x148 mm, Inner cable routing, Dropper seat post ready
SUSPENSION FORK	RockShox RECON Silver RL, Tapered, SoloAir, 15x110mm axle, 120mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO XT RD-M8130, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 203MM
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 35mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black Matte

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	56	56	56	56
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	500
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1215	1215	1235	1264
STEM (MM)	45	45	45	45
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	L408/T125	L458/T150	L500/T170	L500/T170

eXP 6.5

Matte Dark Chrome / Black

eMTB HARDTAIL / eXP



COMPUTER POWERASSISTION

FRAME SIZE	EAN	Quantity
15,5" (S)	8592842207508	
17,5" (M)	8592842202657	
19" (L)	8592842207515	
21" (XL)	8592842207522	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	150km
MAX. TORQUE	100Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	23.60 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance CX, 100Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E40-01, Alu X6 Ultralite, Advanced eMTB Geometry, Integrated battery, SR dropout, Boost 12x148 mm, Inner cable routing, Dropper seat post ready
SUSPENSION FORK	MANITOU MACHETE COMP RL, 29", 120MM, Thru axle 110X15
HEADSET	ACROS AZX-596R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO XT RD-M8130, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 203MM
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 35mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black Matte

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	56	56	56	56
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	500
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1215	1215	1235	1264
STEM (MM)	35	50	50	50
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	L408/T125	L458/T150	L500/T170	L500/T170

eXP 6.3

Gloss Grey / Red

eMTB HARDTAIL / eXP



FRAME SIZE	EAN	Quantity
15,5" (S)	8592842216395	
17,5" (M)	8592842216401	
19" (L)	8592842216418	
21" (XL)	8592842216425	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	150km
MAX. TORQUE	90Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	22.55 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance PX, 90Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E40-01, Alu X6 Ultralite, Advanced eMTB Geometry, Integrated battery, SR dropout, Boost 12x148 mm, Inner cable routing, Dropper seat post ready
SUSPENSION FORK	SR Suntour XCR32, Air, Remote, Tapered, 15x110mm axle, 120mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-10R, RAPIDFIRE Plus, 10-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO CUES CS-LG400, 10-speed, 11-48T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Hurricane Performance, 29x2.25, ADDIX
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Hurricane Performance, 29x2.25, ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 31.8mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Race, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	56	56	56	56
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	500
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1215	1215	1235	1264
STEM (MM)	60	60	60	60
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	400	400	400	400

eXP 6.3

Gloss Grey / Red

eMTB HARDTAIL / eXP



FRAME SIZE	EAN	Quantity
15,5" (S)	8592842207539	
17,5" (M)	8592842207546	
19" (L)	8592842207553	
21" (XL)	8592842207560	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	150km
MAX. TORQUE	90Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	24.35 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance PX, 90Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E40-01, Alu X6 Ultralite, Advanced eMTB Geometry, Integrated battery, SR dropout, Boost 12x148 mm, Inner cable routing, Dropper seat post ready
SUSPENSION FORK	SR Suntour XCR32, Tapered, 15x110mm axle, 120mm travel
HEADSET	ACROS AZX-596R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Hurricane Performance, 29x2.25, ADDIX
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Hurricane Performance, 29x2.25, ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 35mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Race, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-617, 34.9mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	56	56	56	56
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	500
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1215	1215	1235	1264
STEM (MM)	35	50	50	50
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	400	400	400	400

eXP 6.2

Gloss Black

eMTB HARDTAIL / eXP



FRAME SIZE	EAN	Quantity
15,5" (S)	8592842220248	
17,5" (M)	8592842220255	
19" (L)	8592842220262	
21" (XL)	8592842220279	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	120km
MAX. TORQUE	75Nm / 340%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Mini Remote

FRAMESET

FRAME	SU-E40-01, Alu X6 Ultralite, Advanced eMTB Geometry, Integrated battery, SR dropout, Boost 12x148 mm, Inner cable routing, Dropper seat post ready
SUSPENSION FORK	SR Suntour XCM34, Tapered, 15x110mm axle, 120mm travel
HEADSET	FSA NO.80, ICR, Semi-Cartridge, Tapered
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Hurricane Performance, 29x2.25, ADDIX
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Hurricane Performance, 29x2.25, ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Race, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	56	56	56	56
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	500
SEAT TUBE ANGLE	78°	77°	77°	77°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1215	1215	1235	1264
STEM (MM)	60	60	60	60
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	165	165	165	170
SEATPOST (MM)	400	400	400	400

iXP 6.5

Gloss Petrol / Petrol Grey

iMTB HARDTAIL | Light / iXP



FRAME SIZE	EAN	Quantity
14" (XS)	8592842215893	
16" (S)	8592842215909	
18" (M)	8592842215916	
20" (L)	8592842215923	
22" (XL)	8592842215930	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SU-E41-02, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, removable integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 34T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.40"
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.40"
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 20mm rise, 35mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	14" (XS)	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	365	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	550	570	590	610	630
STACK HEIGHT (MM)	632	642	651	660	670
REACH (MM)	369	386	403	421	438
SEAT TUBE ANGLE	74°	74°	74°	74°	74°
HEAD TUBE ANGLE	69°	69°	69°	69°	69°
REAR CENTER (MM)	450	450	450	450	450
HEAD TUBE LENGTH (MM)	110	120	130	140	150
WHEELBASE (MM)	1081	1102	1123	1144	1165
STEM (MM)	45	45	45	45	45
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	160	160	165	170	170
SEATPOST (MM)	350	350	350	350	350

iXR 6.5

Gloss Dust

iGRAVEL | Light / iXR



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842216227	
490mm (S)	8592842216234	
510mm (M)	8592842216241	
530mm (L)	8592842216258	
550mm (XL)	8592842216265	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	17.25 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Mini Remote, Drop Bar

FRAMESET

FRAME	SU-E50-01, Alloy double-butted, Gravel Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, UDH dropout, Integrated Cable Routing, Bike packing and mudguards ready
SUSPENSION FORK	RockShox RUDY Base, Tapered, SoloAir, 12x100mm axle, 40mm travel
HEADSET	ACROS AZX-327R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO GRX RX610, 12-speed
REAR DERAILLEUR	SHIMANO GRX RD-RX822, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T
CASSETTE	SHIMANO SLX CS-M7101, 12-speed, 10-42T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO GRX RX610, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 160mm
BRAKE REAR	SHIMANO GRX RX610, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 160mm

WHEELS

WHEELSET FRONT	DT Swiss HG 1800 SPLINE®, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss HG 1800 SPLINE®, CL, 12x142mm, SH12, Tubeless Ready
TIRE FRONT	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX
TIRE REAR	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX

COCKPIT

STEM	ONE Race ICR, Alloy, 31,8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)
BB DROP (MM)	70	70	70	70	70
SEAT TUBE LENGTH (MM)	470	490	510	530	550
EFFECTIVE TOP TUBE LENGTH (MM)	530	540	550	570	590
STACK HEIGHT (MM)	553	564	574	595	616
REACH (MM)	377	378	380	394	402
SEAT TUBE ANGLE	74,5°	74°	73,5°	73,5°	73°
HEAD TUBE ANGLE	70°	70,5°	70,5°	71°	71,5°
REAR CENTER (MM)	445	445	445	445	445
HEAD TUBE LENGTH (MM)	110	120	130	150	170
WHEELBASE (MM)	1039	1040	1045	1045	1070
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165	165	170	170	170
SEATPOST (MM)	350	350	350	350	350

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

iXR 6.5

Gloss Black / Matte Black

iGRAVEL | Light / iXR



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842219129	
490mm (S)	8592842219136	
510mm (M)	8592842217286	
530mm (L)	8592842217293	
550mm (XL)	8592842217309	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	17.25 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Mini Remote, Drop Bar

FRAMESET

FRAME	SU-E50-01, Alloy double-butted, Gravel Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, UDH dropout, Integrated Cable Routing, Bike packing and mudguards ready
SUSPENSION FORK	RockShox RUDY Base, Tapered, SoloAir, 12x100mm axle, 40mm travel
HEADSET	ACROS AZX-327R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°, Stainless Bearings
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO GRX RX610, 12-speed
REAR DERAILLEUR	SHIMANO GRX RD-RX822, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T
CASSETTE	SHIMANO SLX CS-M7101, 12-speed, 10-42T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO GRX RX610, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 160mm
BRAKE REAR	SHIMANO GRX RX610, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 160mm

WHEELS

WHEELSET FRONT	DT Swiss HG 1800 SPLINE®, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss HG 1800 SPLINE®, CL, 12x142mm, SH12, Tubeless Ready
TIRE FRONT	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX
TIRE REAR	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX

COCKPIT

STEM	ONE Race ICR, Alloy, 31,8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)
BB DROP (MM)	70	70	70	70	70
SEAT TUBE LENGTH (MM)	470	490	510	530	550
EFFECTIVE TOP TUBE LENGTH (MM)	530	540	550	570	590
STACK HEIGHT (MM)	553	564	574	595	616
REACH (MM)	377	378	380	394	402
SEAT TUBE ANGLE	74,5°	74°	73,5°	73,5°	73°
HEAD TUBE ANGLE	70°	70,5°	70,5°	71°	71,5°
REAR CENTER (MM)	445	445	445	445	445
HEAD TUBE LENGTH (MM)	110	120	130	150	170
WHEELBASE (MM)	1039	1040	1045	1045	1070
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165	165	170	170	170
SEATPOST (MM)	350	350	350	350	350



e-TOUR

eBLOX / iBLOX

Superior e-TOUR bikes – eBLOX and iBLOX – are built for everyday comfort and style with electric ease. Whether you prefer the powerful range of eBLOX or the lightweight agility of iBLOX, both offer smooth Bosch support, clean urban design, and relaxed geometry for city rides and weekend escapes.

eBLOX 6.5

Matte Dark Chrome / Black

eTOUR / eBLOX



FRAME SIZE	EAN	Quantity
15,5" (S)	8592842216432	
17,5" (M)	8592842216449	
19" (L)	8592842216456	
21" (XL)	8592842216463	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 800Wh, Smart System
DISTANCE	200km
MAX. TORQUE	100Nm / 400%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance CX, 100Nm
CHARGER	BOSCH 4A
BATTERY	BOSCH PowerTube, 800Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SU-E40-01, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZF-604R1, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U8020, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-45T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Big Apple Performance, RaceGuard, 55-622
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Big Apple Performance, RaceGuard, 55-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 31.8mm, Adjustable, with Light Holder
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	51	51	51	51
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	50
SEAT TUBE ANGLE	78°	77°	77°	78°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1195	1215	1235	1264
STEM (MM)	65	65	65	90
HANDLEBAR (MM)	700	700	700	700
CRANKSET (MM)	160	160	160	160
SEATPOST (MM)	350	350	350	350

eBLOX 6.5 LS

Matte Dark Chrome / Black

eTOUR / eBLOX



FRAME SIZE	EAN	Quantity
16" (S)	8592842216494	
18" (M)	8592842216500	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH CX Performance, Battery PowerTube 800Wh, Smart System
DISTANCE	200km
MAX. TORQUE	100Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	27.30 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance CX, 100Nm
CHARGER	BOSCH 4A
BATTERY	BOSCH PowerTube, 800Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SU-E40-01, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZF-604R1, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U8020, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-45T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Big Apple Performance, RaceGuard, 55-622
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Big Apple Performance, RaceGuard, 55-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 31.8mm, Adjustable, with Light Holder
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atrav Velo System

GEOMETRY

FRAME SIZE	16" (S)	18" (M)
BB DROP (MM)	51	51
SEAT TUBE LENGTH (MM)	393	431
EFFECTIVE TOP TUBE LENGTH (MM)	590	610
STACK HEIGHT (MM)	635	653
REACH (MM)	465	465
SEAT TUBE ANGLE	78,9°	77,5°
HEAD TUBE ANGLE	66°	66°
REAR CENTER (MM)	442	442
HEAD TUBE LENGTH (MM)	120	140
WHEELBASE (MM)	1205	1213
STEM (MM)	65	65
HANDLEBAR (MM)	700	700
CRANKSET (MM)	160	160
SEATPOST (MM)	350	350

eBLOX 6.3

Gloss Dust

eTOUR / eBLOX



FRAME SIZE	EAN	Quantity
15,5" (S)	8592842216517	
17,5" (M)	8592842216524	
19" (L)	8592842216531	
21" (XL)	8592842216548	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	150km
MAX. TORQUE	90Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	26.65 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance PX, 90Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Intuvia 100

FRAMESET

FRAME	SU-E40-01, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	SR Suntour NX1 Tapered, Air, 15x110mm axle, 100mm travel
HEADSET	ACROS AZF-604R1, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Big Apple Performance, RaceGuard, 55-622
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Big Apple Performance, RaceGuard, 55-622
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 31.8mm, Adjustable, with Light Holder
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	51	51	51	51
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	50
SEAT TUBE ANGLE	78°	77°	77°	78°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1195	1215	1235	1264
STEM (MM)	65	65	65	90
HANDLEBAR (MM)	700	700	700	700
CRANKSET (MM)	160	160	160	160
SEATPOST (MM)	350	350	350	350

eBLOX 6.3 LS

Gloss Dust

eTOUR / eBLOX



FRAME SIZE	EAN	Quantity
16" (S)	8592842216579	
18" (M)	8592842216586	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	150km
MAX. TORQUE	90Nm / 400%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance PX, 90Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Intuvia 100

FRAMESET

FRAME	SU-E40-01, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	SR Suntour NX1 Tapered, Air, 15x110mm axle, 100mm travel
HEADSET	ACROS AZF-604R1, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Big Apple Performance, RaceGuard, 55-622
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Big Apple Performance, RaceGuard, 55-622
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE ICR, Alloy, 31.8mm, Adjustable, with Light Holder
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	16" (S)	18" (M)
BB DROP (MM)	51	51
SEAT TUBE LENGTH (MM)	393	431
EFFECTIVE TOP TUBE LENGTH (MM)	590	610
STACK HEIGHT (MM)	635	653
REACH (MM)	465	465
SEAT TUBE ANGLE	78,9°	77,5°
HEAD TUBE ANGLE	66°	66°
REAR CENTER (MM)	442	442
HEAD TUBE LENGTH (MM)	120	140
WHEELBASE (MM)	1205	1213
STEM (MM)	65	65
HANDLEBAR (MM)	700	700
CRANKSET (MM)	160	160
SEATPOST (MM)	350	350

eBLOX 6.2

Gloss Black

eTOUR / eBLOX



FRAME SIZE	EAN	Quantity
15,5" (S)	8592842220408	
17,5" (M)	8592842220415	
19" (L)	8592842220422	
21" (XL)	8592842220439	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	120km
MAX. TORQUE	75Nm / 340%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Intuvia 100

FRAMESET

FRAME	SU-E40-01, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	SR Suntour NVX32, Tapered, 15x110mm axle, 100mm travel
HEADSET	FSA NO.80, ICR, Semi-Cartridge, Tapered
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Big Apple Performance, RaceGuard, 55-622
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Big Apple Performance, RaceGuard, 55-622
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	51	51	51	51
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	592	612	632	642
STACK HEIGHT (MM)	638	638	638	656
REACH (MM)	460	459	479	50
SEAT TUBE ANGLE	78°	77°	77°	78°
HEAD TUBE ANGLE	66°	66°	66°	66°
REAR CENTER (MM)	442	442	442	442
HEAD TUBE LENGTH (MM)	120	120	120	140
WHEELBASE (MM)	1195	1215	1235	1264
STEM (MM)	70	70	70	90
HANDLEBAR (MM)	700	700	700	700
CRANKSET (MM)	160	160	160	160
SEATPOST (MM)	350	350	350	350

eBLOX 6.2 LS

Gloss Black

eTOUR / eBLOX



FRAME SIZE	EAN	Quantity
16" (S)	8592842220446	
18" (M)	8592842220453	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
DISTANCE	120km
MAX. TORQUE	75Nm / 340%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 600Wh
DISPLAY	BOSCH Intuvia 100

FRAMESET

FRAME	SU-E40-01, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	SR Suntour NVX32, Tapered, 15x110mm axle, 100mm travel
HEADSET	FSA NO.80, ICR, Semi-Cartridge, Tapered
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, Tubeless, 32H
TIRE FRONT	Schwalbe Big Apple Performance, RaceGuard, 55-622
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, Tubeless, 32H
TIRE REAR	Schwalbe Big Apple Performance, RaceGuard, 55-622
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR8 E, 180lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	16" (S)	18" (M)
BB DROP (MM)	51	51
SEAT TUBE LENGTH (MM)	393	431
EFFECTIVE TOP TUBE LENGTH (MM)	590	610
STACK HEIGHT (MM)	635	653
REACH (MM)	465	465
SEAT TUBE ANGLE	78,9°	77,5°
HEAD TUBE ANGLE	66°	66°
REAR CENTER (MM)	442	442
HEAD TUBE LENGTH (MM)	120	140
WHEELBASE (MM)	1205	1213
STEM (MM)	70	70
HANDLEBAR (MM)	700	700
CRANKSET (MM)	160	160
SEATPOST (MM)	350	350

iBLOX 6.5

Gloss Dust

iTOUR | Light / iBLOX



COMPUTER TRANSDUCER

FRAME SIZE	EAN	Quantity
14" (XS)	8592842215947	
16" (S)	8592842215954	
18" (M)	8592842215961	
20" (L)	8592842215978	
22" (XL)	8592842215985	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SU-E41-02, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, removable integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO XT RD-M8130, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, 32H
TIRE FRONT	Schwalbe G-One Allround Performance, 29x2.25
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, 32H
TIRE REAR	Schwalbe G-One Allround Performance, 29x2.25
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR4 E, 120lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	14" (XS)	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	365	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	550	570	590	610	630
STACK HEIGHT (MM)	632	642	651	660	670
REACH (MM)	369	386	403	421	438
SEAT TUBE ANGLE	74°	74°	74°	74°	74°
HEAD TUBE ANGLE	69°	69°	69°	69°	69°
REAR CENTER (MM)	450	450	450	450	450
HEAD TUBE LENGTH (MM)	110	120	130	140	150
WHEELBASE (MM)	1081	1102	1123	1144	1165
STEM (MM)	70	70	70	90	90
HANDLEBAR (MM)	700	700	700	700	700
CRANKSET (MM)	160	160	165	170	170
SEATPOST (MM)	350	350	350	350	350

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

iBLOX 6.5 LS

Gloss Dust

iTOUR | Light / iBLOX



FRAME SIZE	EAN	Quantity
15" (S)	8592842216029	
16" (M)	8592842216036	
18" (L)	8592842216043	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	23.80 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SU-E41-02, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, removable integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO XT RD-M8130, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, 32H
TIRE FRONT	Schwalbe G-One Allround Performance, 29x2.25
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, 32H
TIRE REAR	Schwalbe G-One Allround Performance, 29x2.25
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR4 E, 120lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	15" (S)	16" (M)	18" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	365	432	485
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	642	651	660
REACH (MM)	386	403	421
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	69°	69°	69°
REAR CENTER (MM)	450	450	450
HEAD TUBE LENGTH (MM)	120	130	140
WHEELBASE (MM)	1102	1123	1144
STEM (MM)	70	70	70
HANDLEBAR (MM)	700	700	700
CRANKSET (MM)	160	165	170
SEATPOST (MM)	350	350	350

iBLOX 6.5 LS

Gloss Black

iTOUR | Light / iBLOX



FRAME SIZE	EAN	Quantity
15" (S)	8592842216050	
16" (M)	8592842216067	
18" (L)	8592842216074	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h
WEIGHT	23.80 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	SU-E41-02, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, removable integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO XT RD-M8130, Shadow Plus Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, 32H
TIRE FRONT	Schwalbe G-One Allround Performance, 29x2.25
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, 32H
TIRE REAR	Schwalbe G-One Allround Performance, 29x2.25
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR4 E, 120lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	15" (S)	16" (M)	18" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	365	432	485
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	642	651	660
REACH (MM)	386	403	421
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	69°	69°	69°
REAR CENTER (MM)	450	450	450
HEAD TUBE LENGTH (MM)	120	130	140
WHEELBASE (MM)	1102	1123	1144
STEM (MM)	70	70	70
HANDLEBAR (MM)	700	700	700
CRANKSET (MM)	160	165	170
SEATPOST (MM)	350	350	350

iBLOX 6.4

Matte Dark Chrome

iTOUR | Light / iBLOX



COMPUTER TRANSDUCER

FRAME SIZE	EAN	Quantity
14" (XS)	8592842220460	
16" (S)	8592842220477	
18" (M)	8592842220484	
20" (L)	8592842220491	
22" (XL)	8592842220507	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	SU-E41-02, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, removable integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, 32H
TIRE FRONT	Schwalbe G-One Allround Performance, 29x2.25
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, 32H
TIRE REAR	Schwalbe G-One Allround Performance, 29x2.25
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR4 E, 120lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	14" (XS)	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	365	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	550	570	590	610	630
STACK HEIGHT (MM)	632	642	651	660	670
REACH (MM)	369	386	403	421	438
SEAT TUBE ANGLE	74°	74°	74°	74°	74°
HEAD TUBE ANGLE	69°	69°	69°	69°	69°
REAR CENTER (MM)	450	450	450	450	450
HEAD TUBE LENGTH (MM)	110	120	130	140	150
WHEELBASE (MM)	1081	1102	1123	1144	1165
STEM (MM)	70	70	70	90	90
HANDLEBAR (MM)	700	700	700	700	700
CRANKSET (MM)	160	160	165	170	170
SEATPOST (MM)	350	350	350	350	350

iBLOX 6.4 LS

Matte Dark Chrome

iTOUR | Light / iBLOX



FRAME SIZE	EAN	Quantity
15" (S)	8592842220514	
16" (M)	8592842220521	
18" (L)	8592842220538	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	SU-E41-02, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, removable integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, 32H
TIRE FRONT	Schwalbe G-One Allround Performance, 29x2.25
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, 32H
TIRE REAR	Schwalbe G-One Allround Performance, 29x2.25
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR4 E, 120lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	15" (S)	16" (M)	18" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	365	432	485
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	642	651	660
REACH (MM)	386	403	421
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	69°	69°	69°
REAR CENTER (MM)	450	450	450
HEAD TUBE LENGTH (MM)	120	130	140
WHEELBASE (MM)	1102	1123	1144
STEM (MM)	70	70	70
HANDLEBAR (MM)	700	700	700
CRANKSET (MM)	160	165	170
SEATPOST (MM)	350	350	350

iBLOX 6.4 LS

Gloss Wax White

iTOUR | Light / iBLOX



FRAME SIZE	EAN	Quantity
15" (S)	8592842220545	
16" (M)	8592842220552	
18" (L)	8592842220569	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH SX Performance, Battery CompactTube 400Wh, Smart System
MAX. TORQUE	60Nm / 400%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance SX, 55Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH CompactTube, 400Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	SU-E41-02, Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, removable integrated battery, Inner Cable Routing
SUSPENSION FORK	RockShox Judy Silver TK, Tapered, SoloAir, 15x110mm axle, 100mm travel
HEADSET	ACROS AZX-327R1, ICR, ZS56/28.6 - ZS56/40, BlockLock 120°
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Race, Alloy
CHAINRING	ONE Race, 38T, with Chain Guard
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT10, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT10, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J30D, Disc, 32H
TIRE FRONT	Schwalbe G-One Allround Performance, 29x2.25
HUB REAR	SHIMANO FH-TC500-HM-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS J30D, Disc, 32H
TIRE REAR	Schwalbe G-One Allround Performance, 29x2.25
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-610, 34.9mm, with Quick Release level, Black
PEDALS	VP Components VP-836

CITY/ SUV SET

FRONT LIGHT	HERRMANS H-Black MR4 E, 120lm
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy
CARRIER	Atran Velo System

GEOMETRY

FRAME SIZE	15" (S)	16" (M)	18" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	365	432	485
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	642	651	660
REACH (MM)	386	403	421
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	69°	69°	69°
REAR CENTER (MM)	450	450	450
HEAD TUBE LENGTH (MM)	120	130	140
WHEELBASE (MM)	1102	1123	1144
STEM (MM)	70	70	70
HANDLEBAR (MM)	700	700	700
CRANKSET (MM)	160	165	170
SEATPOST (MM)	350	350	350



city e-bikes

eWAY / eMOVE

Superior's city e-bikes turn everyday rides into a stylish experience. With Bosch motors, comfort-first geometry, and smart features, they offer a quiet, smooth, and carefree way to move through the city. Perfect for commuting, errands, or relaxed cruising.

eFARAD 6.5

Gloss / Matte Anthracite

eCITY / Farad



0206-02000000000000

VELIKOST RÁMU	EAN	Počet
460mm (S)		
500mm (M)		
540mm (L)		
580mm (XL)		

SPECIFIKACE

ZÁKLADNÍ INFORMACE

ELEKTRO SYSTÉM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
MAX. TOČIVÝ MOMENT	85Nm / 400%
PODPORA DO RYCHLOSTI	25km/h

ISO A ASTM NORMA

ISO norma	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norma	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
NOSNOST	150 Kg

ELEKTRICKÝ POHON

POHONNÁ JEDNOTKA	BOSCH Performance PX, 90Nm
NABÍJEČKA	BOSCH 2A
BATERIE	BOSCH PowerTube, 600Wh
DISPLEJ	BOSCH PURION 200

RÁMOVÁ SADA

RÁM	Alu, easy entry, integrated battery
ODPRUŽENÁ VIDLICE	Suntour NVX32-5TA-DS-700C-50, travel 50 mm, fork length 476 mm
HLAVOVÉ SLOŽENÍ	ONE PT-1866A-078-1, 1-1/8"-1.5", ID52, Integrated

POHON

KLIKY	Alloy
PŘEVODNÍK	Gates CARBON DRIVE CDX, 46T
KAZETA	Gates CARBON DRIVE CDX, 34T

BRZDY

PŘEDNÍ BRZDA	SHIMANO MT200, hydraulic disc brake
PŘEDNÍ KOTOUČ	SHIMANO SM-RT10, 180mm
ZADNÍ BRZDA	SHIMANO MT200, hydraulic disc brake
ZADNÍ KOTOUČ	SHIMANO SM-RT10, 180mm

ZAPLETENÁ KOLA

PŘEDNÍ RÁFEK	STARS J25D, Disc, Alloy, 36H
PŘEDNÍ PLÁŠŤ	SCALATO MONDANO, 55-622, Reflective Tape
ZADNÍ NÁBOJ	SHIMANO NEXUS SG-C7000-5D, 36H, CL, 135x187mm
ZADNÍ RÁFEK	STARS J25D, Disc, Alloy, 36H
ZADNÍ PLÁŠŤ	SCALATO MONDANO, 55-622, Reflective Tape
PAPRSKY	SAPIM Leader, Stainless Black
NIPLE	SAPIM, Brass

KOKPIT

PŘEDSTAVEC	Alloy, 31.8mm, Adjustable
ŘÍDÍTKA	Alloy, 38mm rise, 31.8mm
GRIP LEVÝ	HERRMANS Altro, ergonomic
GRIP PRAVÝ	HERRMANS Altro, ergonomic

KOMPONENTY

SEDLO	Selle Royal Explora
SEDLOVKA	ONE, Alloy, Suspension, 30.9mm
PEDÁLY	Ball bearing, with sand non slip inlay and reflector

VÝBAVA

PŘEDNÍ SVĚTLO	Spanninga NEOS 65, including day running light
ZADNÍ SVĚTLO	Spanninga Pling XE
BLATNÍKY	Alloy
NOSIČ	Alloy Carrier with MIK system

GEOMETRIE

VELIKOST RÁMU	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
SEDLOVKA	350	350	350	350

* Specifikace, barvy a dostupnost produktů mohou podléhat změnám bez předchozího upozornění. Aktuální informace o dostupnosti a cenách vám poskytne prodejce.

superior.

eFARAD 6.4

Gloss Wax White / Matte Black

eCITY / Farad



0276-0276000000000000

VELIKOST RÁMU	EAN	Počet
460mm (S)		
500mm (M)		
540mm (L)		
580mm (XL)		

SPECIFIKACE

ZÁKLADNÍ INFORMACE

ELEKTRO SYSTÉM	BOSCH Performance, Battery PowerTube 600Wh, Smart System
MAX. TOČIVÝ MOMENT	75Nm / 300%
PODPORA DO RYCHLOSTI	25km/h

ISO A ASTM NORMA

ISO norma	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norma	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
NOSNOST	150 Kg

ELEKTRICKÝ POHON

POHONNÁ JEDNOTKA	BOSCH Performance Line, 75Nm
NABÍJEČKA	BOSCH 2A
BATERIE	BOSCH PowerTube, 600Wh
DISPLEJ	BOSCH PURION 200

RÁMOVÁ SADA

RÁM	Alu, easy entry, integrated battery
ODPRUŽENÁ VIDLICE	Suntour NVX32-5TA-DS-700C-50, travel 50 mm, fork length 476 mm
HLAVOVÉ SLOŽENÍ	ONE PT-1866A-078-1, 1-1/8"-1.5", ID52, Integrated

POHON

KLIKY	Alloy
PŘEVODNÍK	ONE, 38T
KAZETA	SHIMANO NEXUS, Sprocket, 18T
ŘETĚZ	KMC e1 EPT

BRZDY

PŘEDNÍ BRZDA	SHIMANO MT200, hydraulic disc brake
PŘEDNÍ KOTOUČ	SHIMANO SM-RT10, 180mm
ZADNÍ BRZDA	SHIMANO MT200, hydraulic disc brake
ZADNÍ KOTOUČ	Rotor 160mm

ZAPLETENÁ KOLA

PŘEDNÍ RÁFEK	STARS J25D, Disc, Alloy, 36H
PŘEDNÍ PLÁŠŤ	SCALATO MONDANO, 55-622, Reflective Tape
ZADNÍ NÁBOJ	SHIMANO NEXUS SG-C7000-5D, 36H, CL, 135x187mm
ZADNÍ RÁFEK	STARS J25D, Disc, Alloy, 36H
ZADNÍ PLÁŠŤ	SCALATO MONDANO, 55-622, Reflective Tape
PAPRSKY	SAPIM Leader, Stainless Black
NIPLE	SAPIM, Brass

KOKPIT

PŘEDSTAVEC	Alloy, 31.8mm, Adjustable
ŘÍDÍTKA	Alloy, 38mm rise, 31.8mm
GRIP LEVÝ	HERRMANS Altro, ergonomic
GRIP PRAVÝ	HERRMANS Altro, ergonomic

KOMPONENTY

SEDLO	Selle Royal Explora
SEDLOVKA	ONE, Alloy, Suspension, 30.9mm
PEDÁLY	Ball bearing, with sand non slip inlay and reflector

VÝBAVA

PŘEDNÍ SVĚTLO	Spanninga NEOS 40
ZADNÍ SVĚTLO	Spanninga Pling XE
BLATNÍKY	Alloy
NOSIČ	Alloy Carrier with MIK system

GEOMETRIE

VELIKOST RÁMU	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
SEDLOVKA	350	350	350	350

eFARAD 6.2

Gloss Mustard Yellow / Matte Black

eCITY / Farad



VELIKOST RÁMU	EAN	Počet
460mm (S)		
500mm (M)		
540mm (L)		
580mm (XL)		

SPECIFIKACE

ZÁKLADNÍ INFORMACE

ELEKTRO SYSTÉM	BOSCH PX Performance, Battery PowerTube 800Wh, Smart System
MAX. TOČIVÝ MOMENT	85Nm / 400%
PODPORA DO RYCHLOSTI	25km/h
VÁHA	31.00 kg

ISO A ASTM NORMA

ISO norma	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norma	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
NOSNOST	150 Kg

ELEKTRICKÝ POHON

POHONNÁ JEDNOTKA	BOSCH Performance PX, 90Nm
NABÍJEČKA	BOSCH 4A
BATERIE	BOSCH PowerTube, 800Wh
DISPLEJ	BOSCH PURION 200

RÁMOVÁ SADA

RÁM	Alu, easy entry, integrated battery
ODPRUŽENÁ VIDLICE	Suntour NVX32-5TA-LO-DS-700C-50, with lock-out, travel 50 mm, fork length 476 mm
HLAVOVÉ SLOŽENÍ	ONE PT-1866A-078-1, 1-1/8"-1.5", ID52, Integrated

POHON

ŘAZENÍ	SHIMANO CUES SL-U6000-10R, RAPIDFIRE Plus, 10-speed
ZADNÍ MĚNIČ	SHIMANO CUES RD-U6020, Shadow Design
KLIKY	Alloy
PŘEVODNÍK	ONE, 44T
ŘETĚZ	SHIMANO CN-LG500

BRZDY

PŘEDNÍ BRZDA	SHIMANO MT200, hydraulic disc brake
PŘEDNÍ KOTOUČ	SHIMANO SM-RT10, 180mm
ZADNÍ BRZDA	SHIMANO MT200, hydraulic disc brake
ZADNÍ KOTOUČ	SHIMANO SM-RT10, 180mm

ZAPLETENÁ KOLA

PŘEDNÍ RÁFEK	STARS J25D, Disc, Alloy, 36H
PŘEDNÍ PLÁŠŤ	SCALATO MONDANO, 55-622, Reflective Tape
ZADNÍ NÁBOJ	SHIMANO FH-QC400, 36H, CL, QR Type
ZADNÍ RÁFEK	STARS J25D, Disc, Alloy, 36H
ZADNÍ PLÁŠŤ	SCALATO MONDANO, 55-622, Reflective Tape
PAPRSKY	SAPIM Leader, Stainless Black
NIPLE	SAPIM, Brass

KOKPIT

PŘEDSTAVEK	Alloy, 31.8mm, Adjustable
ŘÍDÍTKA	Alloy, 38mm rise, 31.8mm
GRIP LEVÝ	HERRMANS Altro, ergonomic
GRIP PRAVÝ	HERRMANS Altro, ergonomic

KOMPONENTY

SEDLO	Selle Royal Explora
SEDLOVKA	ONE, Alloy, Suspension, 30.9mm

VÝBAVA

PŘEDNÍ SVĚTLO	Spanninga NEOS 65, including day running light
ZADNÍ SVĚTLO	Spanninga Pling XE
BLATNÍKY	Alloy
NOSIČ	Alloy Carrier with MIK system

GEOMETRIE

VELIKOST RÁMU	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
SEDLOVKA	350	350	350	350

eWAY 6.0

Dark Green Matte

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842218122	
500mm (M)	8592842218139	
540mm (L)	8592842218146	
580mm (XL)	8592842218153	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE; Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	40Nm / 340%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.80 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line, BES3, 40Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Led Remote

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	RST Volant, 1-1/8", QR Type, 50mm travel
HEADSET	ONE PT-1866A-078-2 1-1/8", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T
CASSETTE	SHIMANO NEXUS, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J19DC, Disc, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J19DC, Disc, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Line DD36
GRIPS RIGHT	HERRMANS Line DD36

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	Spanninga X&O, 30 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
STEM (MM)	75			105
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	300	300	300	300

eWAY 6.5

Gloss Grey

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842207690	
500mm (M)	8592842207706	
540mm (L)	8592842207713	
580mm (XL)	8592842207720	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 625Wh
DISTANCE	150km
MAX. TORQUE	75Nm / 300%
SUPPORT UP TO SPEED	25km/h
WEIGHT	30.30 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 625Wh
DISPLAY	BOSCH Intuvia 100

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	RST Volant, 1-1/8", QR Type, 50mm travel
HEADSET	ONE PT-1866A-078-2 1-1/8", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C7000-5, REVOSHIFT, 5-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	Gates CARBON DRIVE CDX, 46T
CASSETTE	Gates CARBON DRIVE CDX, 34T
BELT	Gates CARBON DRIVE CDX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J19DC, Disc, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C7000-5D, 36H, CL, 135x187mm
RIM REAR	STARS J19DC, Disc, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Line DD36
GRIPS RIGHT	HERRMANS Line DD36

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-828

CITY/ SUV SET

FRONT LIGHT	Spanninga X&O, 50
REAR LIGHT	Spanninga Pling XE
FENDER	Alloy
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
STEM (MM)	75			105
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350

eWAY 6.45

Gloss Dust

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842217644	
500mm (M)	8592842217651	
540mm (L)	8592842218252	
580mm (XL)	8592842217668	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 625Wh
DISTANCE	150km
MAX. TORQUE	75Nm / 300%
SUPPORT UP TO SPEED	25km/h
WEIGHT	30.05 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 625Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	Monoshock, 1.5", 25mm travel
HEADSET	ONE PT-1866A-078-1, 1-1/8"-1.5", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C7000-5, REVOSHIFT, 5-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	Gates CARBON DRIVE CDX, 46T
CASSETTE	Gates CARBON DRIVE CDX, 34T
BELT	Gates CARBON DRIVE CDX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C7000-5D, 36H, CL, 135x187mm
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-827

CITY/ SUV SET

FRONT LIGHT	Spanninga Axendo, 60 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Alloy
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350

eWAY 6.4

Matte Copper Black

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842217750	
500mm (M)	8592842217767	
540mm (L)	8592842217774	
580mm (XL)	8592842217781	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	75Nm / 300%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.35 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	RST Volant, 1-1/8", QR Type, 50mm travel
HEADSET	ONE PT-1866A-078-2 1-1/8", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 44T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-41T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE Sport, Alloy, 30,9mm
SEATPOST CLAMP	ONE FR-E04_01, 34,9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	Spanninga Axendo, 30 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	300	300	300	300

eWAY 6.4

Gloss Soft Green

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842217873	
500mm (M)	8592842217880	
540mm (L)	8592842217897	
580mm (XL)	8592842217903	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	75Nm / 300%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.35 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	RST Volant, 1-1/8", QR Type, 50mm travel
HEADSET	ONE PT-1866A-078-2 1-1/8", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 44T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-41T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE Sport, Alloy, 30,9mm
SEATPOST CLAMP	ONE FR-E04_01, 34,9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	Spanninga Axendo, 30 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	300	300	300	300

eWAY 6.4

Matte Black

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842209113	
500mm (M)	8592842209120	
540mm (L)	8592842209137	
580mm (XL)	8592842209144	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH Performance, Battery PowerTube 625Wh
DISTANCE	150km
MAX. TORQUE	75Nm / 300%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.85 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Performance Line, 75Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 625Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	ZOOM 109D - Monoshock, 1-1/8", Coil, QR Type, 25mm travel
HEADSET	ONE PT-1866A-078-1, 1-1/8"-1.5", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 44T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-41T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J19DC, Disc, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J19DC, Disc, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Line DD36
GRIPS RIGHT	HERRMANS Line DD36

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE Sport, Alloy, 30,9mm
SEATPOST CLAMP	ONE FR-E04_01, 34,9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	Spanninga X&O, 30 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Alloy
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
STEM (MM)	90	90	110	110
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	300	300	300	300

eWAY 6.1

Gloss Dust

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842217798	
500mm (M)	8592842217804	
540mm (L)	8592842217811	
580mm (XL)	8592842217828	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE PLUS; Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	50Nm / 270%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.10 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line Plus, BES3, 50Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	Monoshock, 1.5", 25mm travel
HEADSET	ONE PT-1866A-078-1, 1-1/8"-1.5", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T
CASSETTE	KMC, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-827

CITY/ SUV SET

FRONT LIGHT	Spanninga Axendo, 40 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350

eWAY 6.1

Matte Dark Blue

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842217675	
500mm (M)	8592842217682	
540mm (L)	8592842217699	
580mm (XL)	8592842217705	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE PLUS; Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	50Nm / 270%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.10 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line Plus, BES3, 50Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Kiox 300

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	Monoshock, 1.5", 25mm travel
HEADSET	ONE PT-1866A-078-1, 1-1/8"-1.5", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T
CASSETTE	KMC, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE, Alloy, Suspension, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-827

CITY/ SUV SET

FRONT LIGHT	Spanninga Axendo, 40 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350

eWAY 6.0

Matte Black

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842207614	
500mm (M)	8592842207621	
540mm (L)	8592842207638	
580mm (XL)	8592842207645	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE; Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	40Nm / 340%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.80 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line, BES3, 40Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Led Remote

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
SUSPENSION FORK	RST Volant, 1-1/8", QR Type, 50mm travel
HEADSET	ONE PT-1866A-078-2 1-1/8", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T
CASSETTE	SHIMANO NEXUS, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J19DC, Disc, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J19DC, Disc, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Line DD36
GRIPS RIGHT	HERRMANS Line DD36

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	Spanninga X&O, 30 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
STEM (MM)	75			105
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	300	300	300	300

eWAY 5.9

Matte Black

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842217712	
500mm (M)	8592842217729	
540mm (L)	8592842217736	
580mm (XL)	8592842217743	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE; Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	50Nm / 270%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.05 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line, BES3, 40Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
FORK	Hi-ten, Ahead 1-1/8", Disc Brake
HEADSET	ONE PT-1866A-078-2 1-1/8", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T
CASSETTE	KMC, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	Spanninga Axendo, 30 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350

eWAY 5.9

Gloss Dust Grey

eCITY / eWAY



FRAME SIZE	EAN	Quantity
460mm (S)	8592842217835	
500mm (M)	8592842217842	
540mm (L)	8592842217859	
580mm (XL)	8592842217866	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE; Battery PowerTube 500Wh
DISTANCE	120km
MAX. TORQUE	50Nm / 270%
SUPPORT UP TO SPEED	25km/h
WEIGHT	29.05 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line, BES3, 40Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerTube, 500Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Alu 6061 T6, Touring Geometry, Smooth Welding, Bosch system ready, integrated battery, Inner Cable Routing
FORK	Hi-ten, Ahead 1-1/8", Disc Brake
HEADSET	ONE PT-1866A-078-2 1-1/8", ID52, Integrated

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE Sport, Alloy
CHAINRING	ONE, 38T
CASSETTE	KMC, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 50-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 50-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE FR-E04_01, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	Spanninga Axendo, 30 lux
REAR LIGHT	Spanninga Pling XE
FENDER	Steel
CARRIER	Alloy Carrier with MIK system

GEOMETRY

FRAME SIZE	460mm (S)	500mm (M)	540mm (L)	580mm (XL)
BB DROP (MM)	62	62	62	62
SEAT TUBE LENGTH (MM)	460	500	540	580
EFFECTIVE TOP TUBE LENGTH (MM)	580	600	620	640
STACK HEIGHT (MM)	604	626	648	670
REACH (MM)	390	397	403	409
SEAT TUBE ANGLE	72,5°	72°	71,5°	71°
HEAD TUBE ANGLE	69°	69,8°	70,5°	71,2°
REAR CENTER (MM)	485	485	485	485
HEAD TUBE LENGTH (MM)	170	180	190	200
WHEELBASE (MM)	1127	1133	1139	1145
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350

eMOVE 6.3

Matte Dark Green

eCITY / eWAY



FRAME SIZE	EAN	Quantity
440mm (S)	8592842218665	
500mm (M)	8592842218672	
540mm (L)	8592842218689	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE PLUS; Battery PowerPack Rack 400Wh
DISTANCE	120km
MAX. TORQUE	50Nm / 340%
SUPPORT UP TO SPEED	25km/h
WEIGHT	27.70 kg

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electronically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line Plus, BES3, 50Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerPack Rack, 400Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Easy Entry, Aluminium
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
HEADSET	FSA TH-805ST, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 RevoShift, 7-speed
CRANKSET	ONE, Alloy
CHAINRING	ONE, 38T
CASSETTE	KMC, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25SZ, Disc, 36H
TIRE FRONT	SCALATO MONDANO, 47-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J25SZ, Disc, 36H
TIRE REAR	SCALATO MONDANO, 47-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black Matte
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	AXA Compactline 20, 20 lx
REAR LIGHT	AXA BlueLine
FENDER	Steel
CARRIER	Rear Carrier for Bosch Battery with MIK

GEOMETRY

FRAME SIZE	440mm (S)	500mm (M)	540mm (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	440	500	540
EFFECTIVE TOP TUBE LENGTH (MM)	585	600	620
STACK HEIGHT (MM)	624	647	647
REACH (MM)	394	402	409
SEAT TUBE ANGLE	73°	73°	72°
HEAD TUBE ANGLE	69°	70°	70°
REAR CENTER (MM)	480	480	480
HEAD TUBE LENGTH (MM)	160	180	180
WHEELBASE (MM)	1134	1138	1146
STEM (MM)	90	90	110
HANDLEBAR (MM)	620	620	620
CRANKSET (MM)	170	170	170
SEATPOST (MM)	350	350	350

eMOVE 6.0

Gloss Grey

eCITY / eWAY



FRAME SIZE	EAN	Quantity
440mm (S)	8592842220613	
500mm (M)	8592842220620	
540mm (L)	8592842220637	
570mm (XL)	8592842221320	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE PLUS; Battery PowerPack Rack 500Wh
DISTANCE	140km
MAX. TORQUE	50Nm / 270%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line Plus, 50Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerPack, 500Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Easy Entry, Aluminium
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
HEADSET	FSA TH-805ST, Semi-Cartridge, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE, Alloy
CHAINRING	ONE, 38T
CASSETTE	KMC, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 47-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 47-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black Matte
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	AXA Compactline 20, 20 lx
REAR LIGHT	AXA Blueline
FENDER	Steel
CARRIER	Rear Carrier for Bosch Battery with AVS

GEOMETRY

FRAME SIZE	440mm (S)	500mm (M)	540mm (L)	570mm (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	440	500	540	570
EFFECTIVE TOP TUBE LENGTH (MM)	585	600	620	640
STACK HEIGHT (MM)	624	647	647	644
REACH (MM)	394	402	409	418
SEAT TUBE ANGLE	73°	73°	72°	71°
HEAD TUBE ANGLE	69°	70°	70°	70°
REAR CENTER (MM)	480	480	480	480
HEAD TUBE LENGTH (MM)	160	180	180	180
WHEELBASE (MM)	1134	1138	1146	1155
STEM (MM)	90	90	110	110
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350

eMOVE 6.0

Matte Blue

eCITY / eWAY



FRAME SIZE	EAN	Quantity
440mm (S)	8592842220644	
500mm (M)	8592842220651	
540mm (L)	8592842220668	
570mm (XL)	8592842221313	

SPECIFICATION

BASE INFO

E-SYSTEM	BOSCH ACTIVE LINE PLUS; Battery PowerPack Rack 500Wh
DISTANCE	140km
MAX. TORQUE	50Nm / 270%
SUPPORT UP TO SPEED	25km/h

ISO AND EN NORM

ISO norm	EN 15194 Standard for 'Electrically Power Assisted Cycles' (EPAC)
EN norm	EN17406 Condition 1 Bicycles and EPAC used on regular paved surfaces. Tires intended to maintain ground contact (City and Urban bikes)
LOAD CAPACITY	150 Kg

E- BIKE PARTS

MOTOR	BOSCH Active Line Plus, 50Nm
CHARGER	BOSCH 2A
BATTERY	BOSCH PowerPack, 500Wh
DISPLAY	BOSCH Purion 200

FRAMESET

FRAME	Easy Entry, Aluminium
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
HEADSET	FSA TH-805ST, Semi-Cartridge, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO NEXUS SL-C3000-7 Revoshift, 7-speed
CRANKSET	ONE, Alloy
CHAINRING	ONE, 38T
CASSETTE	KMC, Sprocket, 18T
CHAIN	KMC Z1eHX

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	ONE, 36H, Disc, 3/8"x100x140mm, Nut Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	SCALATO MONDANO, 47-622, Reflective Tape
HUB REAR	SHIMANO NEXUS SG-C3001-7D, 36H, CL, 135x187mm
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	SCALATO MONDANO, 47-622, Reflective Tape
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm, Adjustable
HANDLEBAR	ONE Alloy, 38mm rise, 31.8mm
GRIPS LEFT	HERRMANS Altro, ergonomic
GRIPS RIGHT	HERRMANS Altro, ergonomic

PARTS

SADDLE	Selle Royal Explora
SEATPOST	ONE, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black Matte
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	AXA Compactline 20, 20 lx
REAR LIGHT	AXA Blueline
FENDER	Steel
CARRIER	Rear Carrier for Bosch Battery with AVS

GEOMETRY

FRAME SIZE	440mm (S)	500mm (M)	540mm (L)	570mm (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	440	500	540	570
EFFECTIVE TOP TUBE LENGTH (MM)	585	600	620	640
STACK HEIGHT (MM)	624	647	647	644
REACH (MM)	394	402	409	418
SEAT TUBE ANGLE	73°	73°	72°	71°
HEAD TUBE ANGLE	69°	70°	70°	70°
REAR CENTER (MM)	480	480	480	480
HEAD TUBE LENGTH (MM)	160	180	180	180
WHEELBASE (MM)	1134	1138	1146	1155
STEM (MM)	90	90	110	110
HANDLEBAR (MM)	620	620	620	620
CRANKSET (MM)	170	170	170	170
SEATPOST (MM)	350	350	350	350



MTB full-suspension

XF TEAM / XF RC/ XF DC

Superior XF delivers full control and flow. Its full-suspension frame, smart geometry, and top components give you confidence even in the toughest sections. Fast, playful, and race-ready or just perfect for pure trail fun.



XF 9.9 Team

Red Carbon / Matte Carbon

MTB FULL-SUSPENSION / XF TEAM



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842207379	
17.5" (M)	8592842204378	
19" (L)	8592842207386	
21" (XL)	8592842207393	

SPECIFICATION

BASE INFO

WEIGHT 10.90 kg

ISO AND EN NORM

ISO norm ISO 4210-2 MTB bicycles
 EN norm EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm

LOAD CAPACITY 120 Kg

FRAMESET

FRAME SU-01.2, Carbon MTB Race Pro, Advanced Race Geometry, Travel 110-120 mm, Integrated Cable routing, BB92, 3D alloy one piece link, Carbon swingarm, SR dropout, Boost Thru Axle 148x12 mm, Inner cable routing, Dropped seat post ready

SUSPENSION FORK DT Swiss F232 ONE, Tapered, 15x110mm axle, 120mm travel

REAR SHOCK DT Swiss R232 ONE, size 190x45mm, ODL

BOTTOM BRACKET SHIMANO BB-71-41A, PressFit, shell 41x92mm

HEADSET ACROS AZX-1305R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings

REAR AXLE SB02-LT, TA12x175.5, M12x1,0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT SHIMANO XTR SW-M9250-IR, Di2, 12-speed

REAR DERAILLEUR SHIMANO XTR RD-M9250, Shadow Plus Design

CRANKSET SHIMANO XTR FC-M9200, 34T

CASSETTE SHIMANO XTR CS-M9200, 12-speed, 10-51T

CHAIN SHIMANO XTR CN-M9100

BRAKING SYSTEM

BRAKE FRONT SHIMANO XTR M9200, hydraulic disc brake

ROTOR FRONT SHIMANO RT-CL900, 180mm

BRAKE REAR SHIMANO XTR M9200, hydraulic disc brake

ROTOR REAR SHIMANO RT-CL900, 160mm

WHEELS

WHEELSET FRONT DT Swiss XRC 1200 SPLINE®, Carbon, CL, 15x110mm, Tubeless Ready

WHEELSET REAR DT Swiss XRC 1200 SPLINE®, Carbon, CL, 12x148mm, SH12, Tubeless Ready

TIRE FRONT Schwalbe Rick Evo, TL-Ready, XC Pro, 29x2.4", ADDIX Speed

TIRE REAR Schwalbe Rick Evo, TL-Ready, XC Pro, 29x2.4", ADDIX Speed

COCKPIT

HANDLEBAR ONE Carbon Integrated Cockpit ICR

GRIPS LEFT ONE Race, Lock-On

GRIPS RIGHT ONE Race, Lock-On

PARTS

SADDLE Fizik Ridon X1, Carbon

SEATPOST LEVER SRAM AXS POD, Dropper Post Lever

SEATPOST SRAM Reverb AXS dropper post, 30.9mm

SEATPOST CLAMP ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	42	42	42	42
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	645
STACK HEIGHT (MM)	583	593	602	611
REACH (MM)	439	460	478	496
SEAT TUBE ANGLE	76,3°	76,3°	76,3°	76,3°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1153	1179	1200	1222
HANDLEBAR (MM)	760/60	760/60	760/80	760/80
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L390/T125	L390/T125	L440/T150	L440/T150

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

XF 9.6 Team

Red Carbon / Matte Carbon

MTB FULL-SUSPENSION / XF TEAM



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842207447	
17.5" (M)	8592842204408	
19" (L)	8592842207454	
21" (XL)	8592842207461	

SPECIFICATION

BASE INFO

WEIGHT 11.30 kg

ISO AND EN NORM

ISO norm ISO 4210-2 MTB bicycles
 EN norm EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm

LOAD CAPACITY 120 Kg

FRAMESET

FRAME SU-01.2, Carbon MTB Race Pro, Advanced Race Geometry, Travel 110-120 mm, Integrated Cable routing, BB92, 3D alloy one piece link, Carbon swingarm, SR dropout, Boost Thru Axle 148x12 mm, Inner cable routing, Dropped seat post ready

SUSPENSION FORK DT Swiss F232 ONE, Tapered, 15x110mm axle, 120mm travel

REAR SHOCK DT Swiss R232 ONE, size 190x45mm, ODL

BOTTOM BRACKET SHIMANO BB-71-41A, PressFit, shell 41x92mm

HEADSET ACROS AZX-1305S, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings

REAR AXLE SB02-LT, TA12x175.5, M12x1,0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT SHIMANO XT SW-M8250-IR, Di2, 12-speed

REAR DERAILLEUR SHIMANO XT RD-M8250, Shadow Plus Design

CRANKSET SHIMANO XT FC-M8200, 34T

CASSETTE SHIMANO XT CS-M8200, 12-speed, 10-51T

CHAIN SHIMANO XT CN-M8100

BRAKING SYSTEM

BRAKE FRONT SHIMANO XT M8200, hydraulic disc brake

ROTOR FRONT SHIMANO RT-CL800, 180mm

BRAKE REAR SHIMANO XT M8200, hydraulic disc brake

ROTOR REAR SHIMANO RT-CL800, 160mm

WHEELS

WHEELSET FRONT DT Swiss XRC 1700 SPLINE®, Carbon, CL, 15x110mm, Tubeless Ready

WHEELSET REAR DT Swiss XRC 1700 SPLINE®, Carbon, CL, 12x148mm, SH12, Tubeless Ready

TIRE FRONT Schwalbe Rick Evo, TL-Ready, XC Pro, 29x2.4", ADDIX Speed

TIRE REAR Schwalbe Rick Evo, TL-Ready, XC Pro, 29x2.4", ADDIX Speed

COCKPIT

HANDLEBAR ONE Carbon Integrated Cockpit ICR

GRIPS LEFT ONE Race, Lock-On

GRIPS RIGHT ONE Race, Lock-On

PARTS

SADDLE Fizik Ridon X5, Alloy

SEATPOST LEVER SHIMANO SL-MT500-L, Seat post lever

SEATPOST ONE Sport Dropper Post, Alloy, 30.9mm

SEATPOST CLAMP ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	42	42	42	42
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	645
STACK HEIGHT (MM)	583	593	602	611
REACH (MM)	439	460	478	496
SEAT TUBE ANGLE	76,3°	76,3°	76,3°	76,3°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1153	1179	1200	1222
HANDLEBAR (MM)	760/60	760/60	760/80	760/80
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L408/T125	L408/T125	L458/T150	L458/T150

XF 9.7 RC

Matte Carbon / Smoke Chrome

MTB FULL-SUSPENSION / XF RC



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842207409	
17.5" (M)	8592842207416	
19" (L)	8592842207423	
21" (XL)	8592842207430	

SPECIFICATION

BASE INFO

WEIGHT	12.00 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-01.2, Carbon MTB Race Pro, Advanced Race Geometry, Travel 110-120 mm, Integrated Cable routing, BB92, 3D alloy one piece link, Carbon swingarm, SR dropout, Boost Thru Axle 148x12 mm, Inner cable routing, Dropped seat post ready
SUSPENSION FORK	DT Swiss F232 ONE, Tapered, 15x110mm axle, 120mm travel
REAR SHOCK	DT Swiss R232 ONE, size 190x45mm, ODL
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-644S, ICR, IPS, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings
REAR AXLE	SB02-LT, TA12x175.5, M12x1,0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO XT SW-M8250-IR, Di2, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8250, Shadow Plus Design
CRANKSET	SHIMANO XT FC-M8200, 34T
CASSETTE	SHIMANO XT CS-M8200, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO XT M8200, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 180mm
BRAKE REAR	SHIMANO XT M8200, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 160mm

WHEELS

WHEELSET FRONT	DT Swiss XM 1700 SPLINE®, CL, 15x110mm, Tubeless Ready
WHEELSET REAR	DT Swiss XM 1700 SPLINE®, CL, 12x148mm, SH12, Tubeless Ready
TIRE FRONT	Schwalbe Racing Ray Performance, TL-Ready, 29x2.25", ADDIX SpeedGrip
TIRE REAR	Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 29x2.25", ADDIX

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	42	42	42	42
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	645
STACK HEIGHT (MM)	583	593	602	611
REACH (MM)	439	460	478	496
SEAT TUBE ANGLE	76,3°	76,3°	76,3°	76,3°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1153	1179	1200	1222
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L408/T125	L408/T125	L458/T150	L458/T150

XF 9.6 RC

Coral Red / Gloss Grey

MTB FULL-SUSPENSION / XF RC



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842208857	
17.5" (M)	8592842208864	
19" (L)	8592842208871	
21" (XL)	8592842208888	

SPECIFICATION

BASE INFO

WEIGHT 12.25 kg

ISO AND EN NORM

ISO norm ISO 4210-2 MTB bicycles
EN norm EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm

LOAD CAPACITY 120 Kg

FRAMESET

FRAME SU-01.2, Carbon MTB Race Pro, Advanced Race Geometry, Travel 110-120 mm, Integrated Cable routing, BB92, 3D alloy one piece link, Carbon swingarm, SR dropout, Boost Thru Axle 148x12 mm, Inner cable routing, Dropped seat post ready

SUSPENSION FORK DT Swiss F232 ONE, Tapered, 15x110mm axle, 120mm travel

REAR SHOCK DT Swiss R232 ONE, size 190x45mm, ODL

BOTTOM BRACKET SHIMANO BB-MT500PA, PressFit, shell 41x92mm

HEADSET ACROS AZX-644S, ICR, IPS, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings

REAR AXLE SB02-LT, TA12x175.5, M12x1,0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT SHIMANO DEORE SW-M6250-IR, Di2, 12-speed

REAR DERAILLEUR SHIMANO DEORE RD-M6250-SGS

CRANKSET SHIMANO SLX FC-M7120, Hollowtech II, 34T

CASSETTE SHIMANO DEORE CS-M6100, 12-speed, 10-51T

CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO M6100, hydraulic disc brake

ROTOR FRONT SHIMANO SM-RT54, 180mm

BRAKE REAR SHIMANO M6100, hydraulic disc brake

ROTOR REAR SHIMANO SM-RT54, 160mm

WHEELS

WHEELSET FRONT DT Swiss M 1900 SPLINE®, CL, 15x110mm, Tubeless Ready

WHEELSET REAR DT Swiss M 1900 SPLINE®, CL, 12x148mm, SH12, Tubeless Ready

TIRE FRONT Schwalbe Racing Ray Performance, TL-Ready, 29x2.25", ADDIX SpeedGrip

TIRE REAR Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 29x2.25", ADDIX

COCKPIT

STEM ONE Race, Alloy, 31.8mm, -7°

HANDLEBAR ONE Race, Alloy, 5mm rise, 31.8mm

GRIPS LEFT ONE Race, Lock-On

GRIPS RIGHT ONE Race, Lock-On

PARTS

SADDLE Fizik Ridon X5, Alloy

SEATPOST LEVER SHIMANO SL-MT500-L, Seat post lever

SEATPOST ONE Sport Dropper Post, Alloy, 30.9mm

SEATPOST CLAMP ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	42	42	42	42
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	645
STACK HEIGHT (MM)	583	593	602	611
REACH (MM)	439	460	478	496
SEAT TUBE ANGLE	76,3°	76,3°	76,3°	76,3°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1153	1179	1200	1222
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L408/T125	L408/T125	L458/T150	L458/T150

XF 9.3 RC

Gloss Grey

MTB FULL-SUSPENSION / XF RC



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842214162	
17.5" (M)	8592842214179	
19" (L)	8592842214186	
21" (XL)	8592842214193	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-01.2, Carbon MTB Race Pro, Advanced Race Geometry, Travel 110-120 mm, Integrated Cable routing, BB92, 3D alloy one piece link, Carbon swingarm, SR dropout, Boost Thru Axle 148x12 mm, Inner cable routing, Dropped seat post ready
SUSPENSION FORK	RockShox Recon Silver RL, Tapered, SoloAir, 15x110mm axle, 120mm travel
REAR SHOCK	RockShox Deluxe Select+ RT, size 190x45mm
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8100, Shadow Plus Design
CRANKSET	SHIMANO FC-MT510, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, 29x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, 29x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	42	42	42	42
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	645
STACK HEIGHT (MM)	583	593	602	611
REACH (MM)	439	460	478	496
SEAT TUBE ANGLE	76,3°	76,3°	76,3°	76,3°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1153	1179	1200	1222
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L408/T125	L408/T125	L458/T150	L458/T150

XF 9.6 DC

Gloss Grey / Light Grey

MTB FULL-SUSPENSION / XF DC



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842207812	
17.5" (M)	8592842207829	
19" (L)	8592842207836	
21" (XL)	8592842207843	

SPECIFICATION

BASE INFO

WEIGHT	13.05 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-01.2, Carbon MTB DC , Advanced Down Country Geometry, Travel 130 mm, Integrated Cable routing, BB92, 3D alloy one piece link, Carbon swingarm, SR dropout, Boost Thru Axle 148x12 mm, Dropped seat post ready
SUSPENSION FORK	RockShox PIKE Select Charger RC, Tapered, DebonAir+, 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select+ RT, size 190x45mm
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-1305R1S, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings
REAR AXLE	SB02-LT, TA12x175.5, M12x1,0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SLX SL-M7100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8100, Shadow Plus Design
CRANKSET	SHIMANO XT FC-M8120, Hollowtech II, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO M6120, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 180mm
BRAKE REAR	SHIMANO M6120, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	WTB, KOM LIGHT TEAM i30, Disc, 32H, Tubeless Ready
TIRE FRONT	Schwalbe Wicked Will Evo, SuperGround, TL-Easy, 29x2.40", ADDIX SpeedGrip
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	WTB, KOM LIGHT TEAM i30, Disc, 32H, Tubeless Ready
TIRE REAR	Schwalbe Wicked Will Evo, SuperGround, TL-Easy, 29x2.40", ADDIX SpeedGrip
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 12mm rise, 35mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	35	35	35	35
SEAT TUBE LENGTH (MM)	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	583	609	629	649
STACK HEIGHT (MM)	590	600	609	618
REACH (MM)	428	451	469	487
SEAT TUBE ANGLE	75,3°	75,3°	75,3°	75,3°
HEAD TUBE ANGLE	65,6°	65,6°	65,6°	65,6°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1160	1187	1209	1230
STEM (MM)	35	50	50	50
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L408/T125	L408/T125	L458/T150	L458/T150

XF 6.6 DC

Matte Green Grey

MTB FULL-SUSPENSION / XF DC



COMPUTER GRAFALDESIGN

FRAME SIZE	EAN	Quantity
15.5" (S)	8592842208925	
17.5" (M)	8592842208932	
19" (L)	8592842208949	
21" (XL)	8592842208956	

SPECIFICATION

BASE INFO

WEIGHT	13.95 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-02-02, Alu X6 Ultimate MTB Trail SU-02.2, Advanced Geometry Travel 130 mm, Integrated Cable Routing, BB92, 3D alloy one piece link, Alloy swingarm, SR dropout, Boost 12x148 mm, Inner cable routing, Dropped seat post ready.
SUSPENSION FORK	RockShox PIKE Select Charger RC, Tapered, DebonAir+, 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select+ RT, size 190x45mm
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-1305, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SLX SL-M7100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8100, Shadow Plus Design
CRANKSET	SHIMANO XT FC-M8200, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO XT M8220, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT64, 180mm
BRAKE REAR	SHIMANO XT M8220, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT64, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 12mm rise, 35mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	35	35	35	35
SEAT TUBE LENGTH (MM)	368	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	583	609	629	649
STACK HEIGHT (MM)	590	600	609	618
REACH (MM)	428	451	469	487
SEAT TUBE ANGLE	75,3°	75,3°	75,3°	75,3°
HEAD TUBE ANGLE	65,6°	65,6°	65,6°	65,6°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1160	1187	1209	1230
STEM (MM)	35	50	50	50
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L408/T125	L408/T125	L458/T150	L458/T150

XF 6.2 DC

Gloss Olive

MTB FULL-SUSPENSION / XF DC



FRAME SIZE	EAN	Quantity
15.5" (S)	8592842220675	
17.5" (M)	8592842220682	
19" (L)	8592842220699	
21" (XL)	8592842220705	

SPECIFICATION

BASE INFO

WEIGHT	15.40 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-02-02, Alu X6 Ultimate MTB Trail SU-02.2, Advanced Geometry Travel 130 mm, Integrated Cable Routing, BB92, 3D alloy one piece link, Alloy swingarm, SR dropout, Boost 12x148 mm, Inner cable routing, Dropped seat post ready.
SUSPENSION FORK	RockShox PSYLO Silver RC, Tapered, SoloAir, 15x110mm axle, 140mm travel
REAR SHOCK	RockShox Deluxe Select+ RT, size 190x45mm
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-1305, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	SHIMANO FC-MT510, 34T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT420, 4 piston, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 180mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	WTB, KOM LIGHT TEAM i30, Disc, 32H, Tubeless Ready
TIRE FRONT	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	WTB, KOM LIGHT TEAM i30, Disc, 32H, Tubeless Ready
TIRE REAR	Schwalbe Wicked Will Performance, 29x2.40", ADDIX
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE ICR, Alloy, 35mm, 0°
HANDLEBAR	ONE Alloy, 12mm rise, 35mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST LEVER	SHIMANO SL-MT500-L, Seat post lever
SEATPOST	ONE Sport Dropper Post, Alloy, 30.9mm
SEATPOST CLAMP	ONE CC-080A, 34.9mm, Black

GEOMETRY

FRAME SIZE	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	35	35	35	35
SEAT TUBE LENGTH (MM)	368	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	583	609	629	649
STACK HEIGHT (MM)	590	600	609	618
REACH (MM)	428	451	469	487
SEAT TUBE ANGLE	75,3°	75,3°	75,3°	75,3°
HEAD TUBE ANGLE	65,6°	65,6°	65,6°	65,6°
REAR CENTER (MM)	430	430	430	430
HEAD TUBE LENGTH (MM)	90	100	110	120
WHEELBASE (MM)	1160	1187	1209	1230
STEM (MM)	35	50	50	50
HANDLEBAR (MM)	760	760	760	760
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	L408/T125	L408/T125	L458/T150	L458/T150



MTB hardtail

XP / XC

Superior's XP and XC hardtails offer a great mix of lightness, comfort, and confident handling. Whether you're lining up for a race or heading out for a weekend ride, these bikes deliver efficiency, fun, and a ride everyone can enjoy.

XP 9.8

Gloss Petrol / Petrol Grey

MTB HARDTAIL / XP



COMPUTER MODELING/3D

FRAME SIZE	EAN	Quantity
13.5" (XS)	8592842214544	
15.5" (S)	8592842214551	
17.5" (M)	8592842214568	
19" (L)	8592842214575	
21" (XL)	8592842214582	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Carbon MTB Race Pro Mid Modulus, Advanced Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru Axle 148x12 mm
SUSPENSION FORK	FOX 32 Rhythm , Tapered, GRIP, 15x110mm axle, 110mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327S, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings
REAR AXLE	SB02-LT, TA12x175.5, M12x1,0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SW-M6250-IR, Di2, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8250, Shadow Plus Design
CRANKSET	SHIMANO XT FC-M8200, 32T
CASSETTE	SHIMANO XT CS-M8200, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO XT M8200, hydraulic disc brake
ROTOR FRONT	SHIMANO RT-CL800, 180mm
BRAKE REAR	SHIMANO XT M8200, hydraulic disc brake
ROTOR REAR	SHIMANO RT-CL800, 160mm

WHEELS

WHEELSET FRONT	DT Swiss XRC 1700 SPLINE®, Carbon, CL, 15x110mm, Tubeless Ready
WHEELSET REAR	DT Swiss XRC 1700 SPLINE®, Carbon, CL, 12x148mm, SH12, Tubeless Ready
TIRE FRONT	Schwalbe Rick Evo, TL-Ready, XC Pro, 29x2.4", ADDIX SpeedGrip
TIRE REAR	Schwalbe Rick Evo, TL-Ready, XC Pro, 29x2.4", ADDIX SpeedGrip

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizi:k Ridon X5, Alloy
SEATPOST	ONE Race, Carbon, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	57	57	57	57	57
SEAT TUBE LENGTH (MM)	30	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	645
STACK HEIGHT (MM)	599	599	603	613	622
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	75,9°	75,5°	75,2°	75,4°	76,4°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430	430
HEAD TUBE LENGTH (MM)	90	90	95	105	115
WHEELBASE (MM)	1127	1147	1169	1193	1217
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	350	400	400	400	400

XP 9.6

Matte Dark Chrome / Carbon

MTB HARDTAIL / XP



COMPUTER VISUALIZATION

FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842213554	
15,5" (S)	8592842213561	
17,5" (M)	8592842213578	
19" (L)	8592842213585	
21" (XL)	8592842213592	

SPECIFICATION

BASE INFO

WEIGHT	11.15 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Carbon MTB Race Pro Mid Modulus, Advanced Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru Axle 148x12 mm
SUSPENSION FORK	DT Swiss F232 ONE, Tapered, 15x110mm axle, 110mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327S, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings
REAR AXLE	SB02-LT, TA12x175.5, M12x1,0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SW-M6250-IR, Di2, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8250, Shadow Plus Design
CRANKSET	SHIMANO SLX FC-M7100, Hollowtech II, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO M6100, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO M6100, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

WHEELSET FRONT	DT Swiss X 1900 SPLINE®, CL, 15x110mm, Tubeless Ready
WHEELSET REAR	DT Swiss X 1900 SPLINE®, CL, 12x148mm, SH12, Tubeless Ready
TIRE FRONT	Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX
TIRE REAR	Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Race, Lock-On
GRIPS RIGHT	ONE Race, Lock-On

PARTS

SADDLE	Fizi:k Ridon X5, Alloy
SEATPOST	ONE Race, Carbon, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	57	57	57	57	57
SEAT TUBE LENGTH (MM)	30	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	645
STACK HEIGHT (MM)	599	599	603	613	622
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	75,9°	75,5°	75,2°	75,4°	76,4°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430	430
HEAD TUBE LENGTH (MM)	90	90	95	105	115
WHEELBASE (MM)	1127	1147	1169	1193	1217
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	350	400	400	400	400

XP 9.6

Gloss Coral Red / Grey

MTB HARDTAIL / XP



COMPUTER VISUALIZATION

FRAME SIZE	EAN	Quantity
13.5" (XS)	8592842213608	
15.5" (S)	8592842213615	
17.5" (M)	8592842213622	
19" (L)	8592842213639	
21" (XL)	8592842213646	

SPECIFICATION

BASE INFO

WEIGHT 11.15 kg

ISO AND EN NORM

ISO norm ISO 4210-2 MTB bicycles
EN norm EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY 120 Kg

FRAMESET

FRAME Carbon MTB Race Pro Mid Modulus, Advanced Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru Axle 148x12 mm
SUSPENSION FORK DT Swiss F232 ONE, Tapered, 15x110mm axle, 110mm travel
BOTTOM BRACKET SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET ACROS AZX-327S, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°, Stainless Bearings
REAR AXLE SB02-LT, TA12x175.5, M12x1.0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS RIGHT SHIMANO DEORE SW-M6250-IR, Di2, 12-speed
REAR DERAILLEUR SHIMANO XT RD-M8250, Shadow Plus Design
CRANKSET SHIMANO SLX FC-M7100, Hollowtech II, 32T
CASSETTE SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO M6100, hydraulic disc brake
ROTOR FRONT SHIMANO SM-RT54, 180mm
BRAKE REAR SHIMANO M6100, hydraulic disc brake
ROTOR REAR SHIMANO SM-RT54, 160mm

WHEELS

WHEELSET FRONT DT Swiss X 1900 SPLINE®, CL, 15x110mm, Tubeless Ready
WHEELSET REAR DT Swiss X 1900 SPLINE®, CL, 12x148mm, SH12, Tubeless Ready
TIRE FRONT Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX
TIRE REAR Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX

COCKPIT

STEM ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT ONE Race, Lock-On
GRIPS RIGHT ONE Race, Lock-On

PARTS

SADDLE Fizi:k Ridon X5, Alloy
SEATPOST ONE Race, Carbon, 27.2mm
SEATPOST CLAMP ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13.5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	57	57	57	57	57
SEAT TUBE LENGTH (MM)	30	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	645
STACK HEIGHT (MM)	599	599	603	613	622
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	75,9°	75,5°	75,2°	75,4°	76,4°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430	430
HEAD TUBE LENGTH (MM)	90	90	95	105	115
WHEELBASE (MM)	1127	1147	1169	1193	1217
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	350	400	400	400	400

XP 9.2

Gloss Petrol / Petrol Grey

MTB HARDTAIL / XP



COMPUTER GENERATED

FRAME SIZE	EAN	Quantity
13.5" (XS)	8592842214599	
15.5" (S)	8592842214605	
17.5" (M)	8592842214612	
19" (L)	8592842214629	
21" (XL)	8592842214636	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Carbon MTB Race Pro Mid Modulus, Advanced Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru Axle 148x12 mm
SUSPENSION FORK	RockShox Recon Silver RL R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SW-M6250-IR, Di2, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6250-SGS
CRANKSET	SHIMANO FC-MT510, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, 29x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, 29x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13.5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	57	57	57	57	57
SEAT TUBE LENGTH (MM)	30	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	645
STACK HEIGHT (MM)	599	599	603	613	622
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	75,9°	75,5°	75,2°	75,4°	76,4°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430	430
HEAD TUBE LENGTH (MM)	90	90	95	105	115
WHEELBASE (MM)	1127	1147	1169	1193	1217
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	170	170	170	175	175
SEATPOST (MM)	350	400	400	400	400

XP 9.2

Gloss Black / Carbon

MTB HARDTAIL / XP



COMPUTER VISUALIZATION

FRAME SIZE	EAN	Quantity
13.5" (XS)	8592842214643	
15.5" (S)	8592842214650	
17.5" (M)	8592842214667	
19" (L)	8592842214674	
21" (XL)	8592842214681	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Carbon MTB Race Pro Mid Modulus, Advanced Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru Axle 148x12 mm
SUSPENSION FORK	RockShox Recon Silver RL R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SW-M6250-IR, Di2, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6250-SGS
CRANKSET	SHIMANO FC-MT510, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, 29x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, 29x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13.5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	57	57	57	57	57
SEAT TUBE LENGTH (MM)	30	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	645
STACK HEIGHT (MM)	599	599	603	613	622
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	75,9°	75,5°	75,2°	75,4°	76,4°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430	430
HEAD TUBE LENGTH (MM)	90	90	95	105	115
WHEELBASE (MM)	1127	1147	1169	1193	1217
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	170	170	170	175	175
SEATPOST (MM)	350	400	400	400	400

XP 9.1

Matte Dark Chrome / Carbon

MTB HARDTAIL / XP



COMPUTER GENERATED

FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842216845	
15,5" (S)	8592842216852	
17,5" (M)	8592842216869	
19" (L)	8592842216876	
21" (XL)	8592842216883	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Carbon MTB Race Pro Mid Modulus, Advanced Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru Axle 148x12 mm
SUSPENSION FORK	RockShox Recon Silver RL R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	SHIMANO FC-MT510, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, 29x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, 29x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	57	57	57	57	57
SEAT TUBE LENGTH (MM)	30	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	645
STACK HEIGHT (MM)	599	599	603	613	622
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	75,9°	75,5°	75,2°	75,4°	76,4°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430	430
HEAD TUBE LENGTH (MM)	90	90	95	105	115
WHEELBASE (MM)	1127	1147	1169	1193	1217
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	170	170	170	175	175
SEATPOST (MM)	350	400	400	400	400

XP 9.1

Gloss Grey

MTB HARDTAIL / XP



COMPUTER VISUALISATION

FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842216890	
15.5" (S)	8592842216906	
17.5" (M)	8592842216913	
19" (L)	8592842216920	
21" (XL)	8592842216937	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Carbon MTB Race Pro Mid Modulus, Advanced Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru Axle 148x12 mm
SUSPENSION FORK	RockShox Recon Silver RL R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x175.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	SHIMANO FC-MT510, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, 29x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, 29x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	57	57	57	57	57
SEAT TUBE LENGTH (MM)	30	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	645
STACK HEIGHT (MM)	599	599	603	613	622
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	75,9°	75,5°	75,2°	75,4°	76,4°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	430	430	430	430	430
HEAD TUBE LENGTH (MM)	90	90	95	105	115
WHEELBASE (MM)	1127	1147	1169	1193	1217
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	170	170	170	175	175
SEATPOST (MM)	350	400	400	400	400

XP 6.6

Brushed Teal / Teal

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842212717	
15.5" (S)	8592842212724	
17.5" (M)	8592842212731	
19" (L)	8592842212748	
21" (XL)	8592842212755	

SPECIFICATION

BASE INFO

WEIGHT	13.20 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK	RockShox Recon Silver RL R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SLX SL-M7100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO XT RD-M8100, Shadow Plus Design
CRANKSET	SHIMANO XT FC-M8100, Hollowtech II, 32T
CASSETTE	SHIMANO SLX CS-M7101, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Fizi:k Ridon X5, Alloy
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642
STACK HEIGHT (MM)	611	611	620	629	639
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120
WHEELBASE (MM)	1130	1150	1174	1198	1222
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	400	400	400	400	400

XP 6.6

Gloss Black / Matte Black

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842212762	
15.5" (S)	8592842212779	
17.5" (M)	8592842212786	
19" (L)	8592842212793	
21" (XL)	8592842212809	

SPECIFICATION

BASE INFO

WEIGHT 13.20 kg

ISO AND EN NORM

ISO norm ISO 4210-2 MTB bicycles
EN norm EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm

LOAD CAPACITY 120 Kg

FRAMESET

FRAME Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK RockShox Recon Silver RL R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT SHIMANO SLX SL-M7100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR SHIMANO XT RD-M8100, Shadow Plus Design
CRANKSET SHIMANO XT FC-M8100, Hollowtech II, 32T
CASSETTE SHIMANO SLX CS-M7101, 12-speed, 10-51T
CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO MT410, hydraulic disc brake
ROTOR FRONT SHIMANO SM-RT54, 180mm
BRAKE REAR SHIMANO MT410, hydraulic disc brake
ROTOR REAR SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT STARS R27-1M, Tubeless, 32H
TIRE FRONT Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX
HUB REAR SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR STARS R27-1M, Tubeless, 32H
TIRE REAR Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 29x2.35", ADDIX
SPOKES SAPIM Laser/Race, Stainless Black
NIPPLES SAPIM, Alloy

COCKPIT

STEM ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT ONE Sport, Lock-On
GRIPS RIGHT ONE Sport, Lock-On

PARTS

SADDLE Fizi:k Ridon X5, Alloy
SEATPOST ONE Race, Alloy, 27.2mm
SEATPOST CLAMP ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642
STACK HEIGHT (MM)	611	611	620	629	639
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120
WHEELBASE (MM)	1130	1150	1174	1198	1222
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	400	400	400	400	400

XP 6.2

Gloss Brush Alu / Black

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13.5" (XS)	8592842212816	
15.5" (S)	8592842212823	
17.5" (M)	8592842212830	
19" (L)	8592842212847	
21" (XL)	8592842212854	
23" (XXL)		

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK	RockShox Judy Silver TK R, Tapered, SoloAir, 15x110mm axle, 120mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO SLX RD-M7100, Shadow Plus Design
CRANKSET	SHIMANO FC-MT510, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, 29x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, 29x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13.5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)	23" (XXL)
BB DROP (MM)	60	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533	570
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642	
STACK HEIGHT (MM)	611	611	620	629	639	
REACH (MM)	415	435	455	475	495	515
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120	120
WHEELBASE (MM)	1130	1150	1174	1198	1222	
STEM (MM)	60	60	60	80	80	
HANDLEBAR (MM)	760	760	760	760	760	760
CRANKSET (MM)	170	170	170	175	175	
SEATPOST (MM)	400	400	400	400	400	400

XP 6.2

Gloss Grey

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13.5" (XS)	8592842212861	
15.5" (S)	8592842212878	
17.5" (M)	8592842212885	
19" (L)	8592842212892	
21" (XL)	8592842212908	
23" (XXL)		

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK	RockShox Judy Silver TK R, Tapered, SoloAir, 15x110mm axle, 120mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO SLX RD-M7100, Shadow Plus Design
CRANKSET	SHIMANO FC-MT510, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Racing Ray Performance, 29x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Racing Ralph Performance, 29x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Fizik Ridon X5, Alloy
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13.5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)	23" (XXL)
BB DROP (MM)	60	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533	570
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642	
STACK HEIGHT (MM)	611	611	620	629	639	
REACH (MM)	415	435	455	475	495	515
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120	120
WHEELBASE (MM)	1130	1150	1174	1198	1222	
STEM (MM)	60	60	60	80	80	
HANDLEBAR (MM)	760	760	760	760	760	760
CRANKSET (MM)	170	170	170	175	175	
SEATPOST (MM)	400	400	400	400	400	400

XP 6.1

Brushed Teal / Teal

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13.5" (XS)	8592842214698	
15.5" (S)	8592842214704	
17.5" (M)	8592842214711	
19" (L)	8592842214728	
21" (XL)	8592842214735	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK	SR Suntour XCR32, Air, Remote, Tapered, 15x110mm axle, 120mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13.5" (XS)	15.5" (S)	17.5" (M)	19" (L)	21" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642
STACK HEIGHT (MM)	611	611	620	629	639
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120
WHEELBASE (MM)	1130	1150	1174	1198	1222
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	400	400	400	400	400

XP 6.1

Gloss Black / Matte Black

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842212915	
15,5" (S)	8592842212922	
17,5" (M)	8592842212939	
19" (L)	8592842212946	
21" (XL)	8592842212953	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK	SR Suntour XCR32, Air, Remote, Tapered, 15x110mm axle, 120mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642
STACK HEIGHT (MM)	611	611	620	629	639
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120
WHEELBASE (MM)	1130	1150	1174	1198	1222
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	400	400	400	400	400

XP 6.1

Gloss Brush Alu / Black

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842212960	
15,5" (S)	8592842212977	
17,5" (M)	8592842212984	
19" (L)	8592842212991	
21" (XL)	8592842213004	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK	SR Suntour XCR32, Air, Remote, Tapered, 15x110mm axle, 120mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642
STACK HEIGHT (MM)	611	611	620	629	639
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120
WHEELBASE (MM)	1130	1150	1174	1198	1222
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	400	400	400	400	400

XP 6.1

Gloss Grey

MTB HARDTAIL / XP



FRAME SIZE	EAN	Quantity
13,5" (XS)	8592842213011	
15,5" (S)	8592842213028	
17,5" (M)	8592842213035	
19" (L)	8592842213042	
21" (XL)	8592842213059	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 3 For rough Off-Road riding and jumps less than 60cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, UDH dropout, Boost Thru axle 148x12mm
SUSPENSION FORK	SR Suntour XCR32, Air, Remote, Tapered, 15x110mm axle, 120mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-327, ICR, ZS56/28.6 - ZS56/40, BlockLock 150°
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO DEORE RD-M6100, Shadow Plus Design
CRANKSET	ONE Race, Alloy, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 180mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-TC500-15-B, 32H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS R27-1M, Tubeless, 32H
TIRE FRONT	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-TC500-MS-B, 32H, CL, 12X148mm, THRU Type AXLE
RIM REAR	STARS R27-1M, Tubeless, 32H
TIRE REAR	Schwalbe Rapid Rob, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Race, Alloy, 5mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	13,5" (XS)	15,5" (S)	17,5" (M)	19" (L)	21" (XL)
BB DROP (MM)	60	60	60	60	60
SEAT TUBE LENGTH (MM)	303	393	431	482	533
EFFECTIVE TOP TUBE LENGTH (MM)	565	590	615	635	642
STACK HEIGHT (MM)	611	611	620	629	639
REACH (MM)	415	435	455	475	495
SEAT TUBE ANGLE	76,2°	75,8°	75°	75,7°	77°
HEAD TUBE ANGLE	66,5°	66,5°	66,5°	66,5°	66,5°
REAR CENTER (MM)	432	432	432	432	432
HEAD TUBE LENGTH (MM)	90	90	100	110	120
WHEELBASE (MM)	1130	1150	1174	1198	1222
STEM (MM)	60	60	60	80	80
HANDLEBAR (MM)	760	760	760	760	760
CRANKSET (MM)	165	170	170	175	175
SEATPOST (MM)	400	400	400	400	400

XC 6.9

Gloss Black

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213066	
18" (M)	8592842213073	
20" (L)	8592842213080	
22" (XL)	8592842213097	

SPECIFICATION

BASE INFO

WEIGHT 14.85 kg

ISO AND EN NORM

ISO norm ISO 4210-2 MTB bicycles
 EN norm EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm

LOAD CAPACITY 120 Kg

FRAMESET

FRAME Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
 SUSPENSION FORK Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
 BOTTOM BRACKET SHIMANO, Cartridge Bearing
 HEADSET FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
 REAR DERAILLEUR SHIMANO CUES RD-U6000, Shadow Plus Design
 CRANKSET SHIMANO CUES FC-U6000, 32T
 CASSETTE SHIMANO CUES CS-LG400, 11-speed, 11-50T
 CHAIN SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT SHIMANO MT200, hydraulic disc brake
 ROTOR FRONT Rotor 160mm
 BRAKE REAR SHIMANO MT200, hydraulic disc brake
 ROTOR REAR Rotor 160mm

WHEELS

HUB FRONT SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
 RIM FRONT STARS J25D, Disc, 32H
 TIRE FRONT Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
 HUB REAR SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
 RIM REAR STARS J25D, Disc, 32H
 TIRE REAR Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
 SPOKES SAPIM Galvanized Black
 NIPPLES SAPIM, Brass

COCKPIT

STEM ONE Sport, Alloy, 31.8mm, -3°
 HANDLEBAR ONE Alloy, 20mm rise, 31.8mm
 GRIPS LEFT ONE Sport, Lock-On
 GRIPS RIGHT ONE Sport, Lock-On

PARTS

SADDLE Selle Royal Vivo
 SEATPOST ONE Sport, Alloy, 27.2mm
 SEATPOST CLAMP ONE CC-610, 31.8mm, with Quick Release level, Black
 PEDALS Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.9

Gloss Yellow

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213141	
18" (M)	8592842213158	
20" (L)	8592842213165	
22" (XL)	8592842213172	

SPECIFICATION

BASE INFO

WEIGHT	14.85 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO, Cartridge Bearing
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.9

Gloss Dust

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213103	
18" (M)	8592842213110	
20" (L)	8592842213127	
22" (XL)	8592842213134	

SPECIFICATION

BASE INFO

WEIGHT	14.85 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO, Cartridge Bearing
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.9 MS

Matte Soft Violet

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213387	
18" (M)	8592842213394	
20" (L)	8592842213400	

SPECIFICATION

BASE INFO

WEIGHT	14.85 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO, Cartridge Bearing
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
STEM (MM)	60	60	60
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	170

XC 6.9 MS

Matte Black / Bordeaux

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)		
18" (M)		
20" (L)		

SPECIFICATION

BASE INFO

WEIGHT	14.85 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO, Cartridge Bearing
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
STEM (MM)	60	60	60
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	170

XC 6.5

Gloss Black

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213189	
18" (M)	8592842213196	
20" (L)	8592842213202	
22" (XL)	8592842213219	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-10R, RAPIDFIRE Plus, 10-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 10-speed, 11-48T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-617, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.5

Matte Dark Chrome

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213226	
18" (M)	8592842213233	
20" (L)	8592842213240	
22" (XL)	8592842213257	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-10R, RAPIDFIRE Plus, 10-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 10-speed, 11-48T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-617, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.5

Gloss Dust

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842214742	
18" (M)	8592842214759	
20" (L)	8592842214766	
22" (XL)	8592842214773	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-10R, RAPIDFIRE Plus, 10-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 10-speed, 11-48T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-617, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.5 MS

Gloss Black / Copper

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213417	
18" (M)	8592842213424	
20" (L)	8592842213431	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6000-10R, RAPIDFIRE Plus, 10-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG400, 10-speed, 11-48T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-617, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
STEM (MM)	60	60	60
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	170

XC 6.2

Gloss Grey / Petrol

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213264	
18" (M)	8592842213271	
20" (L)	8592842213288	
22" (XL)	8592842213295	

SPECIFICATION

BASE INFO

WEIGHT	14.75 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.2

Gloss Yellow

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213301	
18" (M)	8592842213318	
20" (L)	8592842213325	
22" (XL)	8592842213332	

SPECIFICATION

BASE INFO

WEIGHT	14.75 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.2

Matte Dark Chrome

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213349	
18" (M)	8592842213356	
20" (L)	8592842213363	
22" (XL)	8592842213370	

SPECIFICATION

BASE INFO

WEIGHT 14.75 kg

ISO AND EN NORM

ISO norm ISO 4210-2 MTB bicycles
 EN norm EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm

LOAD CAPACITY 120 Kg

FRAMESET

FRAME Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
 SUSPENSION FORK Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
 BOTTOM BRACKET SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
 HEADSET FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
 REAR DERAILLEUR SHIMANO CUES RD-U4000, Shadow Design
 CRANKSET SHIMANO CUES FC-U4000, 32T
 CASSETTE SHIMANO CUES CS-LG300, 9-speed, 11-46T
 CHAIN SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT SHIMANO MT200, hydraulic disc brake
 ROTOR FRONT Rotor 160mm
 BRAKE REAR SHIMANO MT200, hydraulic disc brake
 ROTOR REAR Rotor 160mm

WHEELS

HUB FRONT SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
 RIM FRONT STARS J25D, Disc, 32H
 TIRE FRONT Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
 HUB REAR SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
 RIM REAR STARS J25D, Disc, 32H
 TIRE REAR Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
 SPOKES SAPIM Galvanized Black
 NIPPLES SAPIM, Brass

COCKPIT

STEM ONE Sport, Alloy, 31.8mm, -3°
 HANDLEBAR ONE Alloy, 20mm rise, 31.8mm
 GRIPS LEFT ONE Sport, Lock-On
 GRIPS RIGHT ONE Sport, Lock-On

PARTS

SADDLE Selle Royal Vivo
 SEATPOST ONE Sport, Alloy, 27.2mm
 SEATPOST CLAMP ONE CC-610, 31.8mm, with Quick Release level, Black
 PEDALS Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
STEM (MM)	60	60	80	80
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	175	175	175

XC 6.2 MS

Gloss Black / Copper

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842213448	
18" (M)	8592842213455	
20" (L)	8592842213462	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
STEM (MM)	60	60	60
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	175

XC 6.2 MS

Gloss White / Copper

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842214780	
18" (M)	8592842214797	
20" (L)	8592842214803	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	Suspension Air fork, AHEAD 1-1/8", QR Type, 120mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Sport, Alloy, 31.8mm, -3°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
STEM (MM)	60	60	60
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	175

XC 6.1

Gloss Black

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219266	
18" (M)	8592842219341	
20" (L)	8592842219426	
22" (XL)	8592842219501	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	170	175	175

XC 6.1

Gloss Dust

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219280	
18" (M)	8592842219365	
20" (L)	8592842219440	
22" (XL)	8592842219518	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	170	175	175

XC 6.1

Matte Dark Red

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219327	
18" (M)	8592842219402	
20" (L)	8592842219488	
22" (XL)	8592842219556	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	170	175	175

XC 6.1 MS

Matte Purple

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219334	
18" (M)	8592842219419	
20" (L)	8592842219495	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	175

XC 6.1 MS

Matte Black / Bordeaux

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842221412	
18" (M)	8592842221436	
20" (L)	8592842221450	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 32T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 29x2.25", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	175

XC 6.0

Gloss Grey / Petrol

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219297	
18" (M)	8592842219372	
20" (L)	8592842219457	
22" (XL)	8592842219525	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ESSA RD-U2000, Shadow Design
CRANKSET	ONE Sport, Alloy, 34T
CASSETTE	Shimano HG300, 11-45T
CHAIN	KMC NS8

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Rubena Cheetah, 29x2,1"
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Rubena Cheetah, 29x2,1"
SPOKES	SAPIM Zinc
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	350	350	350	350

XC 6.0

Gloss Yellow

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219303	
18" (M)	8592842219389	
20" (L)	8592842219464	
22" (XL)	8592842219532	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ESSA RD-U2000, Shadow Design
CRANKSET	ONE Sport, Alloy, 34T
CASSETTE	Shimano HG300, 11-45T
CHAIN	KMC NS8

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Rubena Cheetah, 29x2,1"
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Rubena Cheetah, 29x2,1"
SPOKES	SAPIM Zinc
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	350	350	350	350

XC 6.0

Matte Dark Chrome

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219310	
18" (M)	8592842219396	
20" (L)	8592842219471	
22" (XL)	8592842219549	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ESSA RD-U2000, Shadow Design
CRANKSET	ONE Sport, Alloy, 34T
CASSETTE	Shimano HG300, 11-45T
CHAIN	KMC NS8

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Rubena Cheetah, 29x2,1"
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Rubena Cheetah, 29x2,1"
SPOKES	SAPIM Zinc
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)	22" (XL)
BB DROP (MM)	60	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508	559
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625	635
STACK HEIGHT (MM)	608	617	617	636
REACH (MM)	423	445	465	471
SEAT TUBE ANGLE	75,5°	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°	67°
REAR CENTER (MM)	420	420	420	420
HEAD TUBE LENGTH (MM)	90	100	100	120
WHEELBASE (MM)	1143	1170	1190	1203
HANDLEBAR (MM)	720	720	720	720
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	350	350	350	350

XC 6.0 MS

Gloss Black / Copper

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842219273	
18" (M)	8592842219358	
20" (L)	8592842219433	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ESSA RD-U2000, Shadow Design
CRANKSET	ONE Sport, Alloy, 34T
CASSETTE	Shimano HG300, 11-45T
CHAIN	KMC NS8

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Rubena Cheetah, 29x2,1"
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Rubena Cheetah, 29x2,1"
SPOKES	SAPIM Zinc
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	175
SEATPOST (MM)	350	350	350

XC 6.0 MS

Gloss White / Copper

MTB HARDTAIL / XC



FRAME SIZE	EAN	Quantity
16" (S)	8592842221405	
18" (M)	8592842221429	
20" (L)	8592842221443	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 MTB bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Smooth Welding, Sport Geometry, Geometry, Integrated Cable Routing, BB BSA 73 mm, IDK dropout,
SUSPENSION FORK	SR Suntour XCT 30 DS, AHEAD 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ESSA RD-U2000, Shadow Design
CRANKSET	ONE Sport, Alloy, 34T
CASSETTE	Shimano HG300, 11-45T
CHAIN	KMC NS8

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, 32H
TIRE FRONT	Rubena Cheetah, 29x2,1"
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, 32H
TIRE REAR	Rubena Cheetah, 29x2,1"
SPOKES	SAPIM Zinc
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Sport Wide
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	16" (S)	18" (M)	20" (L)
BB DROP (MM)	60	60	60
SEAT TUBE LENGTH (MM)	406	457	508
EFFECTIVE TOP TUBE LENGTH (MM)	580	605	625
STACK HEIGHT (MM)	608	617	617
REACH (MM)	423	445	465
SEAT TUBE ANGLE	75,5°	75,5°	75,5°
HEAD TUBE ANGLE	67°	67°	67°
REAR CENTER (MM)	440	440	440
HEAD TUBE LENGTH (MM)	90	100	100
WHEELBASE (MM)	1143	1161	1190
HANDLEBAR (MM)	720	720	720
CRANKSET (MM)	170	170	175
SEATPOST (MM)	350	350	350



road & gravel

RR / XR GF / XR GR/ GA

Superior road and gravel bikes are built for speed. Lightweight frames, stiff response, and precise handling give you the edge – on pavement or beyond. Whether racing, training, or exploring new routes, one thing's certain: you'll be faster than expected.

RR 9.8

Matte Carbon / Black

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842209755	
520mm (S)	8592842209762	
540mm (M)	8592842209779	
560mm (L)	8592842209786	
580mm (XL)	8592842209793	

SPECIFICATION

BASE INFO

WEIGHT	7.50 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 6 Suitable Road Riding
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
FORK	RR Mid Modulus Carbon Fork, Rake 50mm
BOTTOM BRACKET	SHIMANO BB-RS501, BSA, shell 68mm
HEADSET	ACROS AIX-525S, ICR, OD56, IS52/28.6 - 40IPS, Stainless Bearings
FRONT AXLE	ONE, TA12x115, M12xP1.0x15L, Black
REAR AXLE	ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ULTEGRA R8170, Di2, 2-speed
SHIFTERS RIGHT	SHIMANO ULTEGRA R8170, Di2, 12-speed
FRONT DERAILLEUR	SHIMANO ULTEGRA FD-R8150, Down Swing, Brazed-On Type
REAR DERAILLEUR	SHIMANO ULTEGRA RD-R8150, Shadow Design
CRANKSET	SHIMANO ULTEGRA FC-R8100, Hollowtech II
CASSETTE	SHIMANO ULTEGRA CS-R8101, 12-speed, 11-34T
CHAIN	SHIMANO XT CN-M8100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO ULTEGRA R8170, hydraulic disc brake
ROTOR FRONT	SHIMANO RT-CL800, 160mm
BRAKE REAR	SHIMANO ULTEGRA R8170, hydraulic disc brake
ROTOR REAR	SHIMANO RT-CL800, 140mm

WHEELS

WHEELSET FRONT	DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x142mm, SH11, Tubeless Ready
TIRE FRONT	Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race
TIRE REAR	Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race

COCKPIT

HANDLEBAR	ONE Carbon Integrated Cockpit ICR
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Fizik Vento Argo R5, Alloy
SEATPOST	ONE Carbon, Offset 13mm
SEATPOST CLAMP	Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
HANDLEBAR (MM)	380/70	380/90	400/100	400/100	420/100
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

RR 9.8

Matte Carbon / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842209809	
520mm (S)	8592842209816	
540mm (M)	8592842209823	
560mm (L)	8592842209830	
580mm (XL)	8592842209847	

SPECIFICATION

BASE INFO

WEIGHT 7.50 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525S, ICR, OD56, IS52/28.6 - 40IPS, Stainless Bearings
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO ULTEGRA R8170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO ULTEGRA R8170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO ULTEGRA FD-R8150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO ULTEGRA RD-R8150, Shadow Design
 CRANKSET SHIMANO ULTEGRA FC-R8100, Hollowtech II
 CASSETTE SHIMANO ULTEGRA CS-R8101, 12-speed, 11-34T
 CHAIN SHIMANO XT CN-M8100

BRAKING SYSTEM

BRAKE FRONT SHIMANO ULTEGRA R8170, hydraulic disc brake
 ROTOR FRONT SHIMANO RT-CL800, 160mm
 BRAKE REAR SHIMANO ULTEGRA R8170, hydraulic disc brake
 ROTOR REAR SHIMANO RT-CL800, 140mm

WHEELS

WHEELSET FRONT DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x100mm, Tubeless Ready
 WHEELSET REAR DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x142mm, SH11, Tubeless Ready
 TIRE FRONT Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race
 TIRE REAR Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race

COCKPIT

HANDLEBAR ONE Carbon Integrated Cockpit ICR
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Fizik Vento Argo R5, Alloy
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
HANDLEBAR (MM)	380/70	380/90	400/100	400/100	420/100
CRANKSET (MM)	165, 50-34T	165, 50-34T	165, 50-34T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

RR 9.8

Gloss Red / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842209854	
520mm (S)	8592842209861	
540mm (M)	8592842209878	
560mm (L)	8592842209885	
580mm (XL)	8592842209892	

SPECIFICATION

BASE INFO

WEIGHT	7.50 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 6 Suitable Road Riding
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
FORK	RR Mid Modulus Carbon Fork, Rake 50mm
BOTTOM BRACKET	SHIMANO BB-RS501, BSA, shell 68mm
HEADSET	ACROS AIX-525S, ICR, OD56, IS52/28.6 - 40IPS, Stainless Bearings
FRONT AXLE	ONE, TA12x115, M12xP1.0x15L, Black
REAR AXLE	ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ULTEGRA R8170, Di2, 2-speed
SHIFTERS RIGHT	SHIMANO ULTEGRA R8170, Di2, 12-speed
FRONT DERAILLEUR	SHIMANO ULTEGRA FD-R8150, Down Swing, Brazed-On Type
REAR DERAILLEUR	SHIMANO ULTEGRA RD-R8150, Shadow Design
CRANKSET	SHIMANO ULTEGRA FC-R8100, Hollowtech II
CASSETTE	SHIMANO ULTEGRA CS-R8101, 12-speed, 11-34T
CHAIN	SHIMANO XT CN-M8100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO ULTEGRA R8170, hydraulic disc brake
ROTOR FRONT	SHIMANO RT-CL800, 160mm
BRAKE REAR	SHIMANO ULTEGRA R8170, hydraulic disc brake
ROTOR REAR	SHIMANO RT-CL800, 140mm

WHEELS

WHEELSET FRONT	DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x142mm, SH11, Tubeless Ready
TIRE FRONT	Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race
TIRE REAR	Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race

COCKPIT

HANDLEBAR	ONE Carbon Integrated Cockpit ICR
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Fizik Vento Argo R5, Alloy
SEATPOST	ONE Carbon, Offset 13mm
SEATPOST CLAMP	Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
HANDLEBAR (MM)	380/70	380/90	400/100	400/100	420/100
CRANKSET (MM)	165, 50-34T	165, 50-34T	165, 50-34T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

RR 9.6

Matte Carbon / Black

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842209908	
520mm (S)	8592842209915	
540mm (M)	8592842209922	
560mm (L)	8592842209939	
580mm (XL)	8592842209946	

SPECIFICATION

BASE INFO

WEIGHT 8.00 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

WHEELSET FRONT DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x100mm, Tubeless Ready
 WHEELSET REAR DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x142mm, SH11, Tubeless Ready
 TIRE FRONT Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race
 TIRE REAR Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race

COCKPIT

HANDLEBAR ONE Carbon Integrated Cockpit ICR
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
HANDLEBAR (MM)	380/70	380/90	400/100	400/100	420/100
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

RR 9.6

Matte Carbon / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842209953	
520mm (S)	8592842209960	
540mm (M)	8592842209977	
560mm (L)	8592842209984	
580mm (XL)	8592842209991	

SPECIFICATION

BASE INFO

WEIGHT 8.00 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

WHEELSET FRONT DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x100mm, Tubeless Ready
 WHEELSET REAR DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x142mm, SH11, Tubeless Ready
 TIRE FRONT Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race
 TIRE REAR Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race

COCKPIT

HANDLEBAR ONE Carbon Integrated Cockpit ICR
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
HANDLEBAR (MM)	380/70	380/90	400/100	400/100	420/100
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

RR 9.6

Gloss Red / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842210003	
520mm (S)	8592842210010	
540mm (M)	8592842210027	
560mm (L)	8592842210034	
580mm (XL)	8592842210041	

SPECIFICATION

BASE INFO

WEIGHT 8.00 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

WHEELSET FRONT DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x100mm, Tubeless Ready
 WHEELSET REAR DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x142mm, SH11, Tubeless Ready
 TIRE FRONT Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race
 TIRE REAR Schwalbe Pro One Evo, V-Guard, TL-Easy, 28-622, ADDIX Race

COCKPIT

HANDLEBAR ONE Carbon Integrated Cockpit ICR
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
HANDLEBAR (MM)	380/70	380/90	400/100	400/100	420/100
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

RR 9.5

Matte Carbon / Black

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842210058	
520mm (S)	8592842210065	
540mm (M)	8592842210072	
560mm (L)	8592842210089	
580mm (XL)	8592842210096	

SPECIFICATION

BASE INFO

WEIGHT 8.45 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
 RIM FRONT DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE FRONT Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 HUB REAR SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
 RIM REAR DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE REAR Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 SPOKES SAPIM Race, Stainless Black
 NIPPLES SAPIM, Alloy

COCKPIT

STEM ONE Race ICR, Alloy, 31,8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

RR 9.5

Matte Carbon / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842210102	
520mm (S)	8592842210119	
540mm (M)	8592842210126	
560mm (L)	8592842210133	
580mm (XL)	8592842210140	

SPECIFICATION

BASE INFO

WEIGHT 8.45 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
 RIM FRONT DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE FRONT Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 HUB REAR SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
 RIM REAR DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE REAR Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 SPOKES SAPIM Race, Stainless Black
 NIPPLES SAPIM, Alloy

COCKPIT

STEM ONE Race ICR, Alloy, 31,8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

RR 9.5

Gloss Red / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842210157	
520mm (S)	8592842210164	
540mm (M)	8592842210171	
560mm (L)	8592842210188	
580mm (XL)	8592842210195	

SPECIFICATION

BASE INFO

WEIGHT 8.45 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
 RIM FRONT DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE FRONT Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 HUB REAR SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
 RIM REAR DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE REAR Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 SPOKES SAPIM Race, Stainless Black
 NIPPLES SAPIM, Alloy

COCKPIT

STEM ONE Race ICR, Alloy, 31,8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

RR 9.4

Matte Carbon / Black

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842210201	
520mm (S)	8592842210218	
540mm (M)	8592842210225	
560mm (L)	8592842210232	
580mm (XL)	8592842210249	

SPECIFICATION

BASE INFO

WEIGHT 8.40 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7120, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7120, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7100, Down Swing, Down Pull, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7100, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7120, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7120, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
 RIM FRONT DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE FRONT Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 HUB REAR SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
 RIM REAR DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE REAR Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 SPOKES SAPIM Race, Stainless Black
 NIPPLES SAPIM, Alloy

COCKPIT

STEM ONE Race ICR, Alloy, 31,8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

RR 9.4

Matte Carbon / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842210256	
520mm (S)	8592842210263	
540mm (M)	8592842210270	
560mm (L)	8592842210287	
580mm (XL)	8592842210294	

SPECIFICATION

BASE INFO

WEIGHT 8.40 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7120, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7120, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7100, Down Swing, Down Pull, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7100, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7120, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7120, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
 RIM FRONT DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE FRONT Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 HUB REAR SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
 RIM REAR DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE REAR Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 SPOKES SAPIM Race, Stainless Black
 NIPPLES SAPIM, Alloy

COCKPIT

STEM ONE Race ICR, Alloy, 31,8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

RR 9.4

Gloss Red / White

ROAD & GRAVEL / ROAD



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842210300	
520mm (S)	8592842210317	
540mm (M)	8592842210324	
560mm (L)	8592842210331	
580mm (XL)	8592842210348	

SPECIFICATION

BASE INFO

WEIGHT 8.40 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME BF-FB-08, Carbon RR Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BSA 68, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible.
 FORK RR Mid Modulus Carbon Fork, Rake 50mm
 BOTTOM BRACKET SHIMANO BB-RS501, BSA, shell 68mm
 HEADSET ACROS AIX-525, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE ONE, TA12x115, M12xP1.0x15L, Black
 REAR AXLE ONE, TA12x156.5, M12xP1.0x9.2mm, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7120, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7120, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7100, Down Swing, Down Pull, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7100, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7120, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7120, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
 RIM FRONT DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE FRONT Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 HUB REAR SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
 RIM REAR DT Swiss R500, Disc, 28H, Tubeless Ready
 TIRE REAR Schwalbe One Performance, RaceGuard, 28-622, ADDIX
 SPOKES SAPIM Race, Stainless Black
 NIPPLES SAPIM, Alloy

COCKPIT

STEM ONE Race ICR, Alloy, 31,8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Carbon, Offset 13mm
 SEATPOST CLAMP Frame Integrated Clamp

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)
BB DROP (MM)	74	74	70	70	70
SEAT TUBE LENGTH (MM)	471	486	503	522	533
EFFECTIVE TOP TUBE LENGTH (MM)	503	524	540	555	576
STACK HEIGHT (MM)	505	527	546	565	584
REACH (MM)	368	378	384	388	397
SEAT TUBE ANGLE	75°	74,5°	74°	73,5°	73°
HEAD TUBE ANGLE	71,5°	72,5°	73°	73°	73°
REAR CENTER (MM)	410	410	410	410	410
HEAD TUBE LENGTH (MM)	100	120	140	160	180
WHEELBASE (MM)	969	977	981	990	1005
STEM (MM)	80	80	90	100	110
HANDLEBAR (MM)	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 52-36T	172.5, 52-36T	172.5, 52-36T
SEATPOST (MM)	400	400	400	400	400

XR 9.7 GF

Gloss Rainbow Black / Carbon

ROAD & GRAVEL / GRAN FONDO



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842214810	
520mm (S)	8592842214827	
540mm (M)	8592842214834	
560mm (L)	8592842214841	
580mm (XL)	8592842214858	
610mm (XXL)	8592842214865	

SPECIFICATION

BASE INFO

WEIGHT 7.95 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME SU-51-01, Carbon XR Race High Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
 FORK XR Hi Modulus Carbon Fork
 BOTTOM BRACKET SHIMANO BB-72-41B, PressFit, shell 41x86.5mm
 HEADSET ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE SB02-LT, TA12x119, M12xP1.5x8.5L, Light, Black
 REAR AXLE SB02-LT, TA12x171.5, M12xP1.0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO ULTEGRA R8170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO ULTEGRA R8170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO ULTEGRA FD-R8150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO ULTEGRA RD-R8150, Shadow Design
 CRANKSET SHIMANO ULTEGRA FC-R8100, Hollowtech II
 CASSETTE SHIMANO ULTEGRA CS-R8101, 12-speed, 11-34T
 CHAIN SHIMANO XT CN-M8100

BRAKING SYSTEM

BRAKE FRONT SHIMANO ULTEGRA R8170, hydraulic disc brake
 ROTOR FRONT SHIMANO RT-CL800, 160mm
 BRAKE REAR SHIMANO ULTEGRA R8170, hydraulic disc brake
 ROTOR REAR SHIMANO RT-CL800, 140mm

WHEELS

WHEELSET FRONT DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x100mm, Tubeless Ready
 WHEELSET REAR DT Swiss ERC 1600 SPLINE®, Carbon, CL, 12x142mm, SH11, Tubeless Ready
 TIRE FRONT Schwalbe Pro One Evo, V-Guard, TL-Easy, 30-622, ADDIX Race
 TIRE REAR Schwalbe Pro One Evo, V-Guard, TL-Easy, 30-622, ADDIX Race

COCKPIT

STEM ONE Race ICR, Alloy, 31.8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Fizik Vento Argo R5, Alloy
 SEATPOST ONE Aero Carbon
 SEATPOST CLAMP Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT Litemove Rear Visibility Light, Red

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	421	464	484	504	524	555
EFFECTIVE TOP TUBE LENGTH (MM)	523	535	545	574	595	616
STACK HEIGHT (MM)	524	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.8°	72.6°	72.6°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	994	995	1000	1016	1034	1048
STEM (MM)	70	80	100	100	110	110
HANDLEBAR (MM)	410	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 50-34T	172.5, 50-34T	172.5, 50-34T	175, 50-34T
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

XR 9.5 GF

Gloss Dust

ROAD & GRAVEL / GRAN FONDO



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842214933	
520mm (S)	8592842214940	
540mm (M)	8592842214957	
560mm (L)	8592842214964	
580mm (XL)	8592842214971	
610mm (XXL)	8592842214988	

SPECIFICATION

BASE INFO

WEIGHT 8.95 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME SU-52-01, Carbon XR Race Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
 FORK XR Mid Modulus Carbon Fork
 BOTTOM BRACKET SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
 HEADSET ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE SB02-LT, TA12x119, M12xP1.5x8.5L, Light, Black
 REAR AXLE SB02-LT, TA12x171.5, M12xP1.0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

WHEELSET FRONT DT Swiss E 1800 SPLINE®, CL, 12x100mm, Tubeless Ready
 WHEELSET REAR DT Swiss E 1800 SPLINE®, CL, 12x142mm, SH11, Tubeless Ready
 TIRE FRONT Schwalbe Pro One Evo, V-Guard, TL-Easy, 30-622, ADDIX Race
 TIRE REAR Schwalbe Pro One Evo, V-Guard, TL-Easy, 30-622, ADDIX Race

COCKPIT

STEM ONE Race ICR, Alloy, 31.8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Aero Carbon
 SEATPOST CLAMP Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT Litemove Rear Visibility Light, Red

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	420	462	482	502	522	552
EFFECTIVE TOP TUBE LENGTH (MM)	526	536	546	570	592	611
STACK HEIGHT (MM)	525	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.7°	72.6°	72.9°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	993	995	1000	1016	1034	1048
STEM (MM)	70	80	100	100	110	110
HANDLEBAR (MM)	410	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 50-34T	172.5, 50-34T	172.5, 50-34T	175, 50-34T
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

XR 9.5 GF

Gloss Black / Matte Carbon

ROAD & GRAVEL / GRAN FONDO



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842214995	
520mm (S)	8592842215008	
540mm (M)	8592842215015	
560mm (L)	8592842215022	
580mm (XL)	8592842215039	
610mm (XXL)	8592842215046	

SPECIFICATION

BASE INFO

WEIGHT 8.95 kg

ISO AND EN NORM

ISO norm ISO 4210-2 Road Racing bicycles
 EN norm EN17406 Condition 6 Suitable Road Riding
 LOAD CAPACITY 120 Kg

FRAMESET

FRAME SU-52-01, Carbon XR Race Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
 FORK XR Mid Modulus Carbon Fork
 BOTTOM BRACKET SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
 HEADSET ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
 FRONT AXLE SB02-LT, TA12x119, M12xP1.5x8.5L, Light, Black
 REAR AXLE SB02-LT, TA12x171.5, M12xP1.0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS LEFT SHIMANO 105 R7170, Di2, 2-speed
 SHIFTERS RIGHT SHIMANO 105 R7170, Di2, 12-speed
 FRONT DERAILLEUR SHIMANO 105 FD-R7150, Down Swing, Brazed-On Type
 REAR DERAILLEUR SHIMANO 105 RD-R7150, Shadow Design
 CRANKSET SHIMANO 105 FC-R7100, Hollowtech II
 CASSETTE SHIMANO 105 CS-R7101, 12 speed, 11-34T
 CHAIN SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT SHIMANO 105 R7170, hydraulic disc brake
 ROTOR FRONT SHIMANO SM-RT70, 160mm
 BRAKE REAR SHIMANO 105 R7170, hydraulic disc brake
 ROTOR REAR SHIMANO SM-RT70, 140mm

WHEELS

WHEELSET FRONT DT Swiss E 1800 SPLINE®, CL, 12x100mm, Tubeless Ready
 WHEELSET REAR DT Swiss E 1800 SPLINE®, CL, 12x142mm, SH11, Tubeless Ready
 TIRE FRONT Schwalbe Pro One Evo, V-Guard, TL-Easy, 30-622, ADDIX Race
 TIRE REAR Schwalbe Pro One Evo, V-Guard, TL-Easy, 30-622, ADDIX Race

COCKPIT

STEM ONE Race ICR, Alloy, 31,8mm, -7°
 HANDLEBAR ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
 GRIPS LEFT ONE Handlebar Tape

PARTS

SADDLE Selle Royal SRX, 148mm
 SEATPOST ONE Aero Carbon
 SEATPOST CLAMP Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT Litemove Rear Visibility Light, Red

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	420	462	482	502	522	552
EFFECTIVE TOP TUBE LENGTH (MM)	526	536	546	570	592	611
STACK HEIGHT (MM)	525	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.7°	72.6°	72.9°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	993	995	1000	1016	1034	1048
STEM (MM)	70	80	100	100	110	110
HANDLEBAR (MM)	410	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 50-34T	172.5, 50-34T	172.5, 50-34T	175, 50-34T
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

XR 9.3 GF

Gloss Emerald Black / Carbon

ROAD & GRAVEL / GRAN FONDO



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842217910	
520mm (S)	8592842217927	
540mm (M)	8592842217934	
560mm (L)	8592842217941	
580mm (XL)	8592842218078	
610mm (XXL)	8592842218085	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 6 Suitable Road Riding
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-52-01, Carbon XR Race Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
FORK	XR Mid Modulus Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS LEFT	SHIMANO 105 R7120, 2-speed
SHIFTERS RIGHT	SHIMANO 105 R7120, 12-speed
FRONT DERAILLEUR	SHIMANO 105 FD-R7100, Down Swing, Down Pull, Brazed-On Type
REAR DERAILLEUR	SHIMANO 105 RD-R7100, Shadow Design
CRANKSET	SHIMANO 105 FC-R7100, Hollowtech II
CASSETTE	SHIMANO 105 CS-R7101, 12 speed, 11-34T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO 105 R7120, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT70, 160mm
BRAKE REAR	SHIMANO 105 R7120, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE FRONT	Schwalbe One Performance, RaceGuard, 32-622, ADDIX
HUB REAR	SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE REAR	Schwalbe One Performance, RaceGuard, 32-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race ICR, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Aero Carbon
SEATPOST CLAMP	Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT	LiteMOVE Rear Visibility Light, Red
------------	-------------------------------------

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	420	462	482	502	522	552
EFFECTIVE TOP TUBE LENGTH (MM)	526	536	546	570	592	611
STACK HEIGHT (MM)	525	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.7°	72.6°	72.9°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	993	995	1000	1016	1034	1048
STEM (MM)	70	80	100	100	110	110
HANDLEBAR (MM)	410	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	165, 50-34T	172.5, 50-34T	172.5, 50-34T	175, 50-34T
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

XR 6.5 GF

Gloss Black / White

ROAD & GRAVEL / GRAN FONDO



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842215053	
490mm (S)	8592842215060	
510mm (M)	8592842215077	
530mm (L)	8592842215084	
550mm (XL)	8592842215091	
580mm (XXL)	8592842215107	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 6 Suitable Road Riding
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite X-Road Race , Road Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, Integrated Cable Routing, Full Carbon front fork; mudguards ready
FORK	XR Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS LEFT	SHIMANO 105 R7120, 2-speed
SHIFTERS RIGHT	SHIMANO 105 R7120, 12-speed
FRONT DERAILLEUR	SHIMANO 105 FD-R7100, Down Swing, Down Pull, Brazed-On Type
REAR DERAILLEUR	SHIMANO 105 RD-R7100, Shadow Design
CRANKSET	SHIMANO 105 FC-R7100, Hollowtech II
CASSETTE	SHIMANO 105 CS-R7101, 12 speed, 11-34T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO 105 R7120, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT70, 160mm
BRAKE REAR	SHIMANO 105 R7120, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE FRONT	Schwalbe One Performance, RaceGuard, 30-622, ADDIX
HUB REAR	SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE REAR	Schwalbe One Performance, RaceGuard, 30-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Alloy

COCKPIT

STEM	ONE Race ICR, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)	580mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	470	490	510	530	550	580
EFFECTIVE TOP TUBE LENGTH (MM)	530	538	551	579	599	619
STACK HEIGHT (MM)	523	553	581	600	619	638
REACH (MM)	380	379	381	391	407	415
SEAT TUBE ANGLE	74°	74°	73.8°	72.6°	72.8°	72.3°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	425	425	425	425	425	425
HEAD TUBE LENGTH (MM)	100	130	160	180	200	220
WHEELBASE (MM)	1004	1009	1016	1033	1051	1065
STEM (MM)	70	80	100	100	110	110
HANDLEBAR (MM)	410	410	410	410	430	430
CRANKSET (MM)	165, 50-34T	165, 50-34T	170, 50-34T	172.5, 50-34T	172.5, 50-34T	175, 50-34T
SEATPOST (MM)	350	350	350	350	350	350

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

superior.

153

XR 6.3 GF

Gloss / Matte Night Black

ROAD & GRAVEL / GRAN FONDO



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842220712	
490mm (S)	8592842220729	
510mm (M)	8592842220736	
530mm (L)	8592842220743	
550mm (XL)	8592842220750	
580mm (XXL)	8592842220767	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 6 Suitable Road Riding
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite X-Road Race, Road Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, Integrated Cable Routing, Full Carbon front fork; mudguards ready
FORK	XR Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS LEFT	SHIMANO TIAGRA R4020, 2-speed
SHIFTERS RIGHT	SHIMANO TIAGRA R4020, 11-speed
FRONT DERAILLEUR	SHIMANO TIAGRA FD-R4000, Down Swing, Down Pull, Brazed-On Type
REAR DERAILLEUR	SHIMANO TIAGRA RD-R4000, Shadow Design
CRANKSET	SHIMANO TIAGRA FC-R4000, 50-34T
CASSETTE	SHIMANO CUES CS-RS400, 11 speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO TIAGRA R4020, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 160mm
BRAKE REAR	SHIMANO TIAGRA R4020, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	STARS J21DC, Disc, 28H
TIRE FRONT	Schwalbe One Performance, RaceGuard, 30-622, ADDIX
HUB REAR	SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	STARS J21DC, Disc, 28H
TIRE REAR	Schwalbe One Performance, RaceGuard, 30-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race ICR, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)	580mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	470	490	510	530	550	580
EFFECTIVE TOP TUBE LENGTH (MM)	530	538	551	579	599	619
STACK HEIGHT (MM)	523	553	581	600	619	638
REACH (MM)	380	379	381	391	407	415
SEAT TUBE ANGLE	74°	74°	73.8°	72.6°	72.8°	72.3°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	425	425	425	425	425	425
HEAD TUBE LENGTH (MM)	100	130	160	180	200	220
WHEELBASE (MM)	1004	1009	1016	1033	1051	1065
STEM (MM)	70	80	100	100	110	110
HANDLEBAR (MM)	410	410	410	410	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	350	350	350	350	350	350

XR 9.9 GR

Gloss Black / Carbon

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842215114	
520mm (S)	8592842215121	
540mm (M)	8592842215138	
560mm (L)	8592842215145	
580mm (XL)	8592842215152	
610mm (XXL)	8592842215169	

SPECIFICATION

BASE INFO

WEIGHT	7.75 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-51-01, Carbon XR Race High Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
FORK	XR Hi Modulus Carbon Fork
BOTTOM BRACKET	SRAM DUB ROAD WIDE, PressFit, shell 41x86,5 mm
HEADSET	ACROS AIX-318R1S, ICR, OD56, IS52/28.6 - 40IPS, Stainless Bearings
FRONT AXLE	SB02-LT, TA12x119, M12xP1.5x8.5L, Light, Black
REAR AXLE	SB02-LT, TA12x171.5, M12xP1.0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS LEFT	SRAM RED AXS, electronic shifter
SHIFTERS RIGHT	SRAM RED AXS, electronic shifter
REAR DERAILLEUR	SRAM RED XPLR AXS, 13 speed
CRANKSET	SRAM RED XPLR, DUB WIDE, 44T
CASSETTE	SRAM RED XPLR XG-1391, 13-speed, 10-46T
CHAIN	SRAM RED, Flattop 12s/13s, 120 Link

BRAKING SYSTEM

BRAKE FRONT	SRAM RED AXS, hydraulic disc brake
ROTOR FRONT	SRAM Paceline X, 160mm
BRAKE REAR	SRAM RED AXS, hydraulic disc brake
ROTOR REAR	SRAM Paceline X, 140mm

WHEELS

WHEELSET FRONT	DT Swiss GRC 1400 DICUT®, Carbon, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss GRC 1400 DICUT®, Carbon, CL, 12x142mm, XDR, Tubeless Ready
TIRE FRONT	Schwalbe G-One RS PRO Evo, Super Race, V-Guard, TL-Ready, 40-622, ADDIX Race
TIRE REAR	Schwalbe G-One RS PRO Evo, Super Race, V-Guard, TL-Ready, 40-622, ADDIX Race

COCKPIT

HANDLEBAR	ONE Carbon Integrated Cockpit ICR
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Fizik Vento Argo R5, Alloy
SEATPOST	ONE Aero Carbon
SEATPOST CLAMP	Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT	Litemove Rear Visibility Light, Red
------------	-------------------------------------

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	421	464	484	504	524	555
EFFECTIVE TOP TUBE LENGTH (MM)	523	535	545	574	595	616
STACK HEIGHT (MM)	524	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.8°	72.6°	72.6°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	994	995	1000	1016	1034	1048
HANDLEBAR (MM)	380/70	380/70	420/90	420/90	440/100	440/100
CRANKSET (MM)	165	165	170	172,5	172,5	175
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

* The specifications, colors, and availability of the products can be subjects to alter without prior notification. For availability and prices, please contact the retailers in your city/country

XR 9.7 GR

Gloss Electric Purple / Grey

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842215237	
520mm (S)	8592842215244	
540mm (M)	8592842215251	
560mm (L)	8592842215268	
580mm (XL)	8592842215275	
610mm (XXL)	8592842215282	

SPECIFICATION

BASE INFO

WEIGHT	8.50 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-52-01, Carbon XR Race Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
FORK	XR Mid Modulus Carbon Fork
BOTTOM BRACKET	SRAM DUB ROAD WIDE, PressFit, shell 41x86,5 mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02-LT, TA12x119, M12xP1.5x8.5L, Light, Black
REAR AXLE	SB02-LT, TA12x171.5, M12xP1.0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS LEFT	SRAM FORCE AXS, electronic shifter
SHIFTERS RIGHT	SRAM FORCE AXS, electronic shifter
REAR DERAILLEUR	SRAM FORCE XPLR AXS, 13 speed
CRANKSET	SRAM FORCE XPLR, DUB WIDE, 44T
CASSETTE	SRAM FORCE XPLR XG-1391, 13-speed, 10-46T
CHAIN	SRAM FORCE, Flattop 12s/13s, 120 Link

BRAKING SYSTEM

BRAKE FRONT	SRAM FORCE AXS, hydraulic disc brake
ROTOR FRONT	SRAM Centerline X, 160mm
BRAKE REAR	SRAM FORCE AXS, hydraulic disc brake
ROTOR REAR	SRAM Centerline X, 140mm

WHEELS

WHEELSET FRONT	DT Swiss GRC 1600, Carbon, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss GRC 1600, Carbon, CL, 12x142mm, XDR, Tubeless Ready
TIRE FRONT	Schwalbe G-One RS Performance, RaceGuard, TL-Ready, 40-622, ADDIX Eco
TIRE REAR	Schwalbe G-One RS Performance, RaceGuard, TL-Ready, 40-622, ADDIX Eco

COCKPIT

STEM	ONE Race ICR, Alloy, 31,8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Fizik Vento Argo R5, Alloy
SEATPOST	ONE Aero Carbon
SEATPOST CLAMP	Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT	Litemove Rear Visibility Light, Red
------------	-------------------------------------

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	420	462	482	502	522	552
EFFECTIVE TOP TUBE LENGTH (MM)	526	536	546	570	592	611
STACK HEIGHT (MM)	525	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.7°	72.6°	72.9°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	993	995	1000	1016	1034	1048
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

XR 9.7 GR

Gloss Grey / Grey

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842215299	
520mm (S)	8592842215305	
540mm (M)	8592842215312	
560mm (L)	8592842215329	
580mm (XL)	8592842215336	
610mm (XXL)	8592842215343	

SPECIFICATION

BASE INFO

WEIGHT	8.50 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-52-01, Carbon XR Race Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
FORK	XR Mid Modulus Carbon Fork
BOTTOM BRACKET	SRAM DUB ROAD WIDE, PressFit, shell 41x86,5 mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02-LT, TA12x119, M12xP1.5x8.5L, Light, Black
REAR AXLE	SB02-LT, TA12x171.5, M12xP1.0x14.5L, Light, Black

DRIVETRAIN

SHIFTERS LEFT	SRAM FORCE AXS, electronic shifter
SHIFTERS RIGHT	SRAM FORCE AXS, electronic shifter
REAR DERAILLEUR	SRAM FORCE XPLR AXS, 13 speed
CRANKSET	SRAM FORCE XPLR, DUB WIDE, 44T
CASSETTE	SRAM FORCE XPLR XG-1391, 13-speed, 10-46T
CHAIN	SRAM FORCE, Flattop 12s/13s, 120 Link

BRAKING SYSTEM

BRAKE FRONT	SRAM FORCE AXS, hydraulic disc brake
ROTOR FRONT	SRAM Centerline X, 160mm
BRAKE REAR	SRAM FORCE AXS, hydraulic disc brake
ROTOR REAR	SRAM Centerline X, 140mm

WHEELS

WHEELSET FRONT	DT Swiss GRC 1600, Carbon, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss GRC 1600, Carbon, CL, 12x142mm, XDR, Tubeless Ready
TIRE FRONT	Schwalbe G-One RS Performance, RaceGuard, TL-Ready, 40-622, ADDIX Eco
TIRE REAR	Schwalbe G-One RS Performance, RaceGuard, TL-Ready, 40-622, ADDIX Eco

COCKPIT

STEM	ONE Race ICR, Alloy, 31,8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Fizik Vento Argo R5, Alloy
SEATPOST	ONE Aero Carbon
SEATPOST CLAMP	Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT	Litemove Rear Visibility Light, Red
------------	-------------------------------------

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	420	462	482	502	522	552
EFFECTIVE TOP TUBE LENGTH (MM)	526	536	546	570	592	611
STACK HEIGHT (MM)	525	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.7°	72.6°	72.9°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	993	995	1000	1016	1034	1048
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

XR 9.5 GRA

Matte Trooper Green / Grey

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842217156	
520mm (S)	8592842217163	
540mm (M)	8592842217170	
560mm (L)	8592842217187	
580mm (XL)	8592842217194	
610mm (XXL)	8592842217200	

SPECIFICATION

BASE INFO

WEIGHT	9.10 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-52-02, Carbon XR Adventure Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
FORK	XR Adventure Mid Modulus Carbon Fork
BOTTOM BRACKET	SRAM DUB ROAD WIDE, PressFit, shell 41x86,5 mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS LEFT	SRAM RIVAL AXS, electronic shifter
SHIFTERS RIGHT	SRAM RIVAL AXS, electronic shifter
REAR DERAILLEUR	SRAM RIVAL XPLR AXS, 13 speed
CRANKSET	SRAM RIVAL XPLR, DUB WIDE, 44T
CASSETTE	SRAM RIVAL XPLR XG-1391, 13-speed, 10-46T
CHAIN	SRAM RIVAL, Flattop 12s/13s, 120 Link

BRAKING SYSTEM

BRAKE FRONT	SRAM RIVAL AXS, hydraulic disc brake
ROTOR FRONT	SRAM Paceline, 160mm
BRAKE REAR	SRAM RIVAL AXS, hydraulic disc brake
ROTOR REAR	SRAM Paceline, 140mm

WHEELS

WHEELSET FRONT	DT Swiss G 1800 SPLINE®, CL, 12x100mm, Tubeless Ready
WHEELSET REAR	DT Swiss G 1800 SPLINE®, CL, 12x142mm, XDR, Tubeless Ready
TIRE FRONT	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX
TIRE REAR	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX

COCKPIT

STEM	ONE Race ICR, Alloy, 31,8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Aero Carbon
SEATPOST CLAMP	Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT	Litemove Rear Visibility Light, Red
------------	-------------------------------------

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	420	462	482	502	522	552
EFFECTIVE TOP TUBE LENGTH (MM)	526	536	546	570	592	611
STACK HEIGHT (MM)	525	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.7°	72.6°	72.9°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	993	995	1000	1016	1034	1048
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

XR 9.3 GRA

Gloss Dust / Dust

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
490mm (XS)	8592842217217	
520mm (S)	8592842217224	
540mm (M)	8592842217231	
560mm (L)	8592842217248	
580mm (XL)	8592842217255	
610mm (XXL)	8592842217262	

SPECIFICATION

BASE INFO

WEIGHT	9.75 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	SU-52-02, Carbon XR Adventure Mid Modulus, Road Advanced Geometry, Disc Brake Flat Mount, BB86.5, SH dropout, Thru Axle 142x12 mm, Inner cable routing, Di2 compatible, mudguards ready.
FORK	XR Adventure Mid Modulus Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x171.5, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO GRX RX610, 12-speed
REAR DERAILLEUR	SHIMANO GRX RD-RX822, Shadow Plus Design
CRANKSET	SHIMANO GRX FC-RX610, 40T
CASSETTE	SHIMANO SLX CS-M7101, 12-speed, 10-45T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO GRX RX610, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT70, 160mm
BRAKE REAR	SHIMANO GRX RX610, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE FRONT	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX
HUB REAR	SHIMANO FH-TC500-MS, 28H, CL, 12X142mm, THRU Type AXLE
RIM REAR	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE REAR	Schwalbe G-One Allround Performance, RaceGuard, TL-Easy, 45-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race ICR, Alloy, 31,8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Aero Carbon
SEATPOST CLAMP	Frame Integrated Clamp

CITY/ SUV SET

REAR LIGHT	Litemove Rear Visibility Light, Red
------------	-------------------------------------

GEOMETRY

FRAME SIZE	490mm (XS)	520mm (S)	540mm (M)	560mm (L)	580mm (XL)	610mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	420	462	482	502	522	552
EFFECTIVE TOP TUBE LENGTH (MM)	526	536	546	570	592	611
STACK HEIGHT (MM)	525	545	563	582	601	620
REACH (MM)	380	379	381	391	407	414
SEAT TUBE ANGLE	74.7°	74°	73.7°	72.6°	72.9°	72°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	415	415	415	415	415	415
HEAD TUBE LENGTH (MM)	100	120	140	160	180	200
WHEELBASE (MM)	993	995	1000	1016	1034	1048
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	320/0mm	320/0mm	400/15mm	400/15mm	400/15mm	400/15mm

XR 6.5 GR

Gloss Sand / Matte Sand

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842215534	
490mm (S)	8592842215541	
510mm (M)	8592842215558	
530mm (L)	8592842215565	
550mm (XL)	8592842215572	
580mm (XXL)	8592842215589	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite X-Road Race , Road Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, Integrated Cable Routing, Full Carbon front fork; mudguards ready
FORK	XR Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO GRX RX610, 12-speed
REAR DERAILLEUR	SHIMANO GRX RD-RX822, Shadow Plus Design
CRANKSET	SHIMANO GRX FC-RX610, 40T
CASSETTE	SHIMANO SLX CS-M7101, 12-speed, 10-45T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO GRX RX610, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT70, 160mm
BRAKE REAR	SHIMANO GRX RX610, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE FRONT	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
HUB REAR	SHIMANO FH-TC500-MS, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE REAR	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race ICR, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)	580mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	470	490	510	530	550	580
EFFECTIVE TOP TUBE LENGTH (MM)	530	538	551	579	599	619
STACK HEIGHT (MM)	523	553	581	600	619	638
REACH (MM)	380	379	381	391	407	415
SEAT TUBE ANGLE	74°	74°	73.8°	72.6°	72.8°	72.3°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	425	425	425	425	425	425
HEAD TUBE LENGTH (MM)	100	130	160	180	200	220
WHEELBASE (MM)	1004	1009	1016	1033	1051	1065
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	350	350	350	350	350	350

XR 6.5 GR

Gloss Black / Matte Black

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842215596	
490mm (S)	8592842215602	
510mm (M)	8592842215619	
530mm (L)	8592842215626	
550mm (XL)	8592842215633	
580mm (XXL)	8592842215640	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu X6 Ultralite X-Road Race , Road Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, Integrated Cable Routing, Full Carbon front fork; mudguards ready
FORK	XR Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO GRX RX610, 12-speed
REAR DERAILLEUR	SHIMANO GRX RD-RX822, Shadow Plus Design
CRANKSET	SHIMANO GRX FC-RX610, 40T
CASSETTE	SHIMANO SLX CS-M7101, 12-speed, 10-45T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO GRX RX610, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT70, 160mm
BRAKE REAR	SHIMANO GRX RX610, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT70, 140mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE FRONT	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
HUB REAR	SHIMANO FH-TC500-MS, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	DT Swiss R500, Disc, 28H, Tubeless Ready
TIRE REAR	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race ICR, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)	580mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	470	490	510	530	550	580
EFFECTIVE TOP TUBE LENGTH (MM)	530	538	551	579	599	619
STACK HEIGHT (MM)	523	553	581	600	619	638
REACH (MM)	380	379	381	391	407	415
SEAT TUBE ANGLE	74°	74°	73.8°	72.6°	72.8°	72.3°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	425	425	425	425	425	425
HEAD TUBE LENGTH (MM)	100	130	160	180	200	220
WHEELBASE (MM)	1004	1009	1016	1033	1051	1065
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	350	350	350	350	350	350

XR 6.3 GR

Brush Alu

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842215657	
490mm (S)	8592842215664	
510mm (M)	8592842215671	
530mm (L)	8592842215688	
550mm (XL)	8592842215695	
580mm (XXL)	8592842215701	

SPECIFICATION

BASE INFO

WEIGHT	11.05 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm

LOAD CAPACITY	120 Kg
---------------	--------

FRAMESET

FRAME	Alu X6 Ultralite X-Road Race, Road Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, Integrated Cable Routing, Full Carbon front fork; mudguards ready
FORK	XR Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES U6030, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6030, 42T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO CUES U6030, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 160mm
BRAKE REAR	SHIMANO CUES U6030, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	STARS J21DC, Disc, 28H
TIRE FRONT	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
HUB REAR	SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	STARS J21DC, Disc, 28H
TIRE REAR	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race ICR, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)	580mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	470	490	510	530	550	580
EFFECTIVE TOP TUBE LENGTH (MM)	530	538	551	579	599	619
STACK HEIGHT (MM)	523	553	581	600	619	638
REACH (MM)	380	379	381	391	407	415
SEAT TUBE ANGLE	74°	74°	73.8°	72.6°	72.8°	72.3°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	425	425	425	425	425	425
HEAD TUBE LENGTH (MM)	100	130	160	180	200	220
WHEELBASE (MM)	1004	1009	1016	1033	1051	1065
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	350	350	350	350	350	350

XR 6.3 GR

Gloss Electric Purple / Grey

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
470mm (XS)	8592842215718	
490mm (S)	8592842215725	
510mm (M)	8592842215732	
530mm (L)	8592842215749	
550mm (XL)	8592842215756	
580mm (XXL)	8592842215763	

SPECIFICATION

BASE INFO

WEIGHT	11.05 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm

LOAD CAPACITY	120 Kg
---------------	--------

FRAMESET

FRAME	Alu X6 Ultralite X-Road Race, Road Advanced Geometry, Smooth Welding, Disc Brake Flat mount, BB BSA 68mm, Integrated Cable Routing, Full Carbon front fork; mudguards ready
FORK	XR Carbon Fork
BOTTOM BRACKET	SHIMANO BB-RS500PB, PressFit, shell 41x86.5mm
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS
FRONT AXLE	SB02, TA12x119, M12xP1.5x8.5L, Black
REAR AXLE	SB02, TA12x165, M12xP1.0x14.5mm, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES U6030, 11-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6030, 42T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-50T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO CUES U6030, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 160mm
BRAKE REAR	SHIMANO CUES U6030, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	STARS J21DC, Disc, 28H
TIRE FRONT	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
HUB REAR	SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	STARS J21DC, Disc, 28H
TIRE REAR	Schwalbe G-One Allround, RaceGuard, TL-Easy, 40-622, ADDIX
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE Race ICR, Alloy, 31.8mm, -7°
HANDLEBAR	ONE Alloy, X-Race Aero, 31.8mm, Reach 70mm, Drop 127mm, Flare 2°, Backsweep 6°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	470mm (XS)	490mm (S)	510mm (M)	530mm (L)	550mm (XL)	580mm (XXL)
BB DROP (MM)	77	77	75	75	73	73
SEAT TUBE LENGTH (MM)	470	490	510	530	550	580
EFFECTIVE TOP TUBE LENGTH (MM)	530	538	551	579	599	619
STACK HEIGHT (MM)	523	553	581	600	619	638
REACH (MM)	380	379	381	391	407	415
SEAT TUBE ANGLE	74°	74°	73.8°	72.6°	72.8°	72.3°
HEAD TUBE ANGLE	70.5°	71°	71.5°	71.5°	72°	72°
REAR CENTER (MM)	425	425	425	425	425	425
HEAD TUBE LENGTH (MM)	100	130	160	180	200	220
WHEELBASE (MM)	1004	1009	1016	1033	1051	1065
STEM (MM)	70	70	80	80	100	100
HANDLEBAR (MM)	410	410	410	430	430	430
CRANKSET (MM)	165	165	170	172.5	172.5	175
SEATPOST (MM)	350	350	350	350	350	350

GA 9.3

Gloss Black

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
S	8592842221122	
M	8592842221139	
L	8592842221146	
XL	8592842221153	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	PD-FB-65E, Carbon Mid Modulus, BSA 68, Flat Mount 160, 12x142, UDH, ACROS headset, SP 27,2, Cable routing thru headset
FORK	GA Carbon Fork
BOTTOM BRACKET	SHIMANO, Cartridge Bearing
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS

DRIVETRAIN

SHIFTERS LEFT	SHIMANO GRX RX610, 2-speed
SHIFTERS RIGHT	SHIMANO GRX RX610, 12-speed
FRONT DERAILLEUR	SHIMANO GRX FD-RX820, Down Swing, Down Pull, Brazed-On Type
REAR DERAILLEUR	SHIMANO GRX RD-RX820, Shadow Plus Design
CRANKSET	SHIMANO GRX FC-RX610, 46-30T
CASSETTE	SHIMANO 105 CS-R7101, 12 speed, 11-34T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO GRX RX610, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT70, 160mm
BRAKE REAR	SHIMANO GRX RX610, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT70, 160mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	STARS J25D, Disc, Alloy, Tubeless, 32H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 45-622, Green Compound, 50EPI
HUB REAR	SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	STARS J25D, Disc, Alloy, Tubeless, 32H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 45-622, Green Compound, 50EPI
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, Allroad Swift, Drop 129mm, Reach 65mm, Flare 8°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	S	M	L	XL
BB DROP (MM)	72	72	72	72
SEAT TUBE LENGTH (MM)	500	520	540	560
EFFECTIVE TOP TUBE LENGTH (MM)	520	535	550	564
STACK HEIGHT (MM)	554	567	582	600
REACH (MM)	366	372	378	386
SEAT TUBE ANGLE	74.5°	74°	73.5°	73.5°
HEAD TUBE ANGLE	70°	70.5°	71°	71°
REAR CENTER (MM)	424	424	424	424
HEAD TUBE LENGTH (MM)	135	147	159	178
WHEELBASE (MM)	1019	1024	1030	1044
HANDLEBAR (MM)	420	420	440	440
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	350	350	350	350

GA 9.1

Matte Dust

ROAD & GRAVEL / GRAVEL



FRAME SIZE	EAN	Quantity
S	8592842221160	
M	8592842221177	
L	8592842221184	
XL	8592842221191	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Road Racing bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	PD-FB-65E, Carbon Mid Modulus, BSA 68, Flat Mount 160, 12x142, UDH, ACROS headset, SP 27,2, Cable routing thru headset
FORK	GA Carbon Fork
BOTTOM BRACKET	SHIMANO, Cartridge Bearing
HEADSET	ACROS AIX-318R1, ICR, OD56, IS52/28.6 - 40IPS

DRIVETRAIN

SHIFTERS LEFT	SHIMANO CUES ST-U6030, 2-speed
SHIFTERS RIGHT	SHIMANO CUES U6030, 11-speed
FRONT DERAILLEUR	SHIMANO CUES FD-U6030, Brazed-On Type
REAR DERAILLEUR	SHIMANO CUES RD-U6040, Shadow Design
CRANKSET	SHIMANO CUES FC-U6040, Hollowtech II, 46-32T
CASSETTE	SHIMANO CUES CS-RS400, 11 speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO CUES U6030, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT54, 160mm
BRAKE REAR	SHIMANO CUES U6030, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT54, 160mm

WHEELS

HUB FRONT	SHIMANO HB-RS470, 28H, CL, 12x100mm, THRU Type AXLE
RIM FRONT	STARS J25D, Disc, Alloy, Tubeless, 32H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 45-622, Green Compound, 50EPI
HUB REAR	SHIMANO FH-RS470, 28H, CL, 12x142mm, THRU Type AXLE
RIM REAR	STARS J25D, Disc, Alloy, Tubeless, 32H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 45-622, Green Compound, 50EPI
SPOKES	SAPIM Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, +6°
HANDLEBAR	ONE Alloy, Allroad Swift, Drop 129mm, Reach 65mm, Flare 8°
GRIPS LEFT	ONE Handlebar Tape

PARTS

SADDLE	Selle Royal SRX, 148mm
SEATPOST	ONE Race, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-080A, 31.8mm, Black

GEOMETRY

FRAME SIZE	S	M	L	XL
BB DROP (MM)	72	72	72	72
SEAT TUBE LENGTH (MM)	500	520	540	560
EFFECTIVE TOP TUBE LENGTH (MM)	520	535	550	564
STACK HEIGHT (MM)	554	567	582	600
REACH (MM)	366	372	378	386
SEAT TUBE ANGLE	74.5°	74°	73.5°	73.5°
HEAD TUBE ANGLE	70°	70.5°	71°	71°
REAR CENTER (MM)	424	424	424	424
HEAD TUBE LENGTH (MM)	135	147	159	178
WHEELBASE (MM)	1019	1024	1030	1044
HANDLEBAR (MM)	420	420	440	440
CRANKSET (MM)	170	170	175	175
SEATPOST (MM)	350	350	350	350



trekking & city

BLOX

Superior's BLOX bikes are the perfect choice for easy rides in and out of the city. Fully equipped with lights, fenders, and racks, they're ready for daily use and weekend adventures. Practical bikes with clean design and a focus on comfort.

BLOX 6.7 T

Gloss Metallic Black

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842216944	
460mm (M)	8592842216951	
510mm (L)	8592842216968	
560mm (XL)	8592842216975	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-HLO, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO CUES SL-U6000-L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
FRONT DERAILLEUR	SHIMANO CUES FD-U6010-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO CUES RD-U8020, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6010, Hollowtech II, 46-32T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-45T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO DH-3D37-QR, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	AXA BlueLine 30, 30 lx
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	70	70	90	90
HANDLEBAR (MM)	660	660	660	660
CRANKSET (MM)	170	170	170	170

BLOX 6.7 T MS

Gloss Metallic Black

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842216982	
460mm (M)	8592842216999	
500mm (L)	8592842217002	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\†
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-HLO, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO CUES SL-U6000-L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO CUES SL-U6000-11R, RAPIDFIRE Plus, 11-speed
FRONT DERAILLEUR	SHIMANO CUES FD-U6010-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO CUES RD-U8020, Shadow Plus Design
CRANKSET	SHIMANO CUES FC-U6010, Hollowtech II, 46-32T
CASSETTE	SHIMANO CUES CS-LG400, 11-speed, 11-45T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO DH-3D37-QR, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	AXA BlueLine 30, 30 lx
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	70	70	90
HANDLEBAR (MM)	660	660	660
CRANKSET (MM)	170	170	170

BLOX 6.5 T

Gloss Dust

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842217019	
460mm (M)	8592842217026	
510mm (L)	8592842217033	
560mm (XL)	8592842217040	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO CUES SL-U4000-L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
FRONT DERAILLEUR	SHIMANO CUES FD-U4000, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO CUES RD-U4020, Shadow Design
CRANKSET	SHIMANO CUES FC-U4010-2, 46-30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO DH-3D37-QR, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	AXA BlueLine 30, 30 lx
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	70	70	90	90
HANDLEBAR (MM)	660	660	660	660
CRANKSET (MM)	170	170	170	170

BLOX 6.5 T MS

Gloss Dust

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842217057	
460mm (M)	8592842217064	
500mm (L)	8592842217071	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO CUES SL-U4000-L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO CUES SL-U4000-R, RAPIDFIRE Plus, 9-speed
FRONT DERAILLEUR	SHIMANO CUES FD-U4000, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO CUES RD-U4020, Shadow Design
CRANKSET	SHIMANO CUES FC-U4010-2, 46-30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO DH-3D37-QR, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FRONT LIGHT	AXA BlueLine 30, 30 lx
REAR LIGHT	spanninga Pling XDS
FENDER	Alloy

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	70	70	90
HANDLEBAR (MM)	660	660	660
CRANKSET (MM)	170	170	170

BLOX 6.5

Gloss Dust

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842220774	
460mm (M)	8592842220781	
510mm (L)	8592842220798	
560mm (XL)	8592842220804	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO CUES SL-U4000-L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
FRONT DERAILLEUR	SHIMANO CUES FD-U4000, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO CUES RD-U4020, Shadow Design
CRANKSET	SHIMANO CUES FC-U4010-2, 46-30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	70	70	90	90
HANDLEBAR (MM)	660	660	660	660
CRANKSET (MM)	170	170	170	170

BLOX 6.5 MS

Gloss Dust

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842220811	
460mm (M)	8592842220828	
500mm (L)	8592842220835	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO CUES SL-U4000-L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
FRONT DERAILLEUR	SHIMANO CUES FD-U4000, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO CUES RD-U4020, Shadow Design
CRANKSET	SHIMANO CUES FC-U4010-2, 46-30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport Ergo, Lock-On
GRIPS RIGHT	ONE Sport Ergo, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	70	70	90
HANDLEBAR (MM)	660	660	660
CRANKSET (MM)	170	170	170

BLOX 6.4 T

Matte Black

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842220842	
460mm (M)	8592842220859	
510mm (L)	8592842220866	
560mm (XL)	8592842220873	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
FORK	Rigid, Alloy 6061 T6, Disc Brake
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 40T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FENDER	Alloy
--------	-------

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	90	90	90	90
HANDLEBAR (MM)	660	660	660	660
CRANKSET (MM)	170	170	170	170

BLOX 6.4 T MS

Matte Black

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842220880	
460mm (M)	8592842220897	
500mm (L)	8592842220903	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
FORK	Rigid, Alloy 6061 T6, Disc Brake
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 40T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Alloy, 30mm rise, 31.8mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FENDER	Alloy
--------	-------

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	90	90	90
HANDLEBAR (MM)	660	660	660
CRANKSET (MM)	170	170	170

BLOX 6.4

Matte Black

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842217088	
460mm (M)	8592842217095	
510mm (L)	8592842217101	
560mm (XL)	8592842217118	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
FORK	Rigid, Alloy 6061 T6, Disc Brake
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 40T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	90	90	90	90
HANDLEBAR (MM)	660	660	660	660
CRANKSET (MM)	170	170	170	170

BLOX 6.4 MS

Matte Black

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842217125	
460mm (M)	8592842217132	
500mm (L)	8592842217149	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
FORK	Rigid, Alloy 6061 T6, Disc Brake
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4000, Shadow Design
CRANKSET	SHIMANO CUES FC-U4000, 40T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-46T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	90	90	90
HANDLEBAR (MM)	660	660	660
CRANKSET (MM)	170	170	170

BLOX 6.2 T

Gloss Grey

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842220910	
460mm (M)	8592842220927	
510mm (L)	8592842220934	
560mm (XL)	8592842220941	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ALTUS SL-M315-2L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
FRONT DERAILLEUR	SHIMANO TOURNEY FD-TY606-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	SHIMANO FC-TY501, 46-30T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FENDER	Alloy
--------	-------

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	90	90	90	90
HANDLEBAR (MM)	660	660	660	660

BLOX 6.2 T MS

Gloss Grey

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842220958	
460mm (M)	8592842220965	
500mm (L)	8592842220972	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ALTUS SL-M315-2L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
FRONT DERAILLEUR	SHIMANO TOURNEY FD-TY606-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	SHIMANO FC-TY501, 46-30T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe Delta Cruiser Plus, PunctureGuard, TwinSkin, 47-622
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

CITY/ SUV SET

FENDER	Alloy
--------	-------

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	90	90	90
HANDLEBAR (MM)	660	660	660

BLOX 6.2

Gloss Grey

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842220989	
460mm (M)	8592842220996	
510mm (L)	8592842221009	
560mm (XL)	8592842221016	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ALTUS SL-M315-2L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
FRONT DERAILLEUR	SHIMANO TOURNEY FD-TY606-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	SHIMANO FC-TY501, 46-30T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	90	90	90	90
HANDLEBAR (MM)	660	660	660	660

BLOX 6.2 MS

Gloss Grey

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842221023	
460mm (M)	8592842221030	
500mm (L)	8592842221047	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX-DS, 1-1/8", Coil, QR Type, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ALTUS SL-M315-2L, RAPIDFIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
FRONT DERAILLEUR	SHIMANO TOURNEY FD-TY606-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	SHIMANO FC-TY501, 46-30T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 36H, CL, M9X100mm, QR Type
RIM FRONT	STARS J25D, Disc, Alloy, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	SHIMANO FH-QC300-HM, 36H, CL, M10X135mm, QR Type
RIM REAR	STARS J25D, Disc, Alloy, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	90	90	90
HANDLEBAR (MM)	660	660	660

BLOX 6.0

Gloss Dark Chrome

TREKKING / CITY



FRAME SIZE	EAN	Quantity
410mm (S)	8592842221054	
460mm (M)	8592842221061	
510mm (L)	8592842221078	
560mm (XL)	8592842221085	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles\
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX P, AHEAD 1-1/8", QR Type, V-Brake, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ALTUS ST-EF500-2L, EZ FIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO ALTUS ST-EF500-7R, EZ FIRE Plus, 7-speed
FRONT DERAILLEUR	SHIMANO TOURNEY FD-TY606-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	SHIMANO FC-TY501, 46-30T
CASSETTE	SHIMANO CS-HG200, 7-speed, 12-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 36H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	ONE Sport, 36H, M10x130, QR Type
RIM REAR	STARS J19SZ, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	410mm (S)	460mm (M)	510mm (L)	560mm (XL)
BB DROP (MM)	70	70	70	70
SEAT TUBE LENGTH (MM)	410	460	510	560
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610	630
STACK HEIGHT (MM)	592	610	610	630
REACH (MM)	400	415	435	450
SEAT TUBE ANGLE	74°	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°	70°
REAR CENTER (MM)	460	460	460	460
HEAD TUBE LENGTH (MM)	140	160	160	180
WHEELBASE (MM)	1087	1109	1129	1150
STEM (MM)	90	90	90	90
HANDLEBAR (MM)	660	660	660	660

BLOX 6.0 MS

Gloss Dark Chrome

TREKKING / CITY



FRAME SIZE	EAN	Quantity
380mm (S)	8592842221092	
460mm (M)	8592842221108	
500mm (L)	8592842221115	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 City and trekking bicycles
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	120 Kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Touring Geometry, Integrated Cable Routing, BB BSA
SUSPENSION FORK	SR Suntour NEX P, AHEAD 1-1/8", QR Type, V-Brake, 50mm travel
BOTTOM BRACKET	SHIMANO BB-UN101, 122.5mm, BSA, shell 73mm
HEADSET	FSA NO.80, ICR, Semi-Cartridge, 1-1/8"

DRIVETRAIN

SHIFTERS LEFT	SHIMANO ALTUS ST-EF500-2L, EZ FIRE Plus, 2-speed
SHIFTERS RIGHT	SHIMANO ALTUS ST-EF500-7R, EZ FIRE Plus, 7-speed
FRONT DERAILLEUR	SHIMANO TOURNEY FD-TY606-L, Top Swing, Dual Pull
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	SHIMANO FC-TY501, 46-30T
CASSETTE	SHIMANO CS-HG200, 7-speed, 12-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 36H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 36H
TIRE FRONT	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
HUB REAR	ONE Sport, 36H, M10x130, QR Type
RIM REAR	STARS J19SZ, 36H
TIRE REAR	Schwalbe G-One Comp Active Line, K-Guard, 50-622, Greeb Compound, 50EPI
SPOKES	SAPIM Leader, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31,8mm, 35°
HANDLEBAR	ONE Alloy, 30mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Vivo
SEATPOST	ONE Sport, Alloy, 30.9mm
SEATPOST CLAMP	ONE, 34.9mm, Black
PEDALS	Marwi SP-823

GEOMETRY

FRAME SIZE	380mm (S)	460mm (M)	500mm (L)
BB DROP (MM)	70	70	70
SEAT TUBE LENGTH (MM)	380	460	500
EFFECTIVE TOP TUBE LENGTH (MM)	570	590	610
STACK HEIGHT (MM)	592	610	629
REACH (MM)	400	414	429
SEAT TUBE ANGLE	74°	74°	74°
HEAD TUBE ANGLE	70°	70°	70°
REAR CENTER (MM)	460	460	460
HEAD TUBE LENGTH (MM)	140	160	180
WHEELBASE (MM)	1087	1109	1130
STEM (MM)	90	90	90
HANDLEBAR (MM)	660	660	660



junior

TEAM / F.L.Y. / RACER

Superior kids' bikes are built for safety, control, and fun. With lightweight frames, comfortable geometry, and reliable components, they help young riders build confidence and enjoy every ride – from their very first pedal strokes.

TEAM 27.7

Gloss Brushed Alu / Red

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
13" (XS)	8592842217316	
15.5" (S)	8592842218641	

SPECIFICATION

BASE INFO

WEIGHT	11.95 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru axle 148x12mm, Inner cable routing.
SUSPENSION FORK	RockShox Judy Silver TK R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-212 R5, ZS44/28.6 - ZS56/40
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO SLX RD-M7100, Shadow Plus Design
CRANKSET	ONE Race, Alloy, 152mm, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-MT410-B, 28H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J25DB, Tubeless, 28H
TIRE FRONT	Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS, 28H, CL, 12X142mm, THRU Type AXLE
RIM REAR	STARS J25DB, Tubeless, 28H
TIRE REAR	Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Mini Vivo
SEATPOST	ONE Race, Carbon, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	13" (XS)	15.5" (S)
BB DROP (MM)	40	40
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	545	586
STACK HEIGHT (MM)	562	562
REACH (MM)	384	425
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	420	420
HEAD TUBE LENGTH (MM)	90	90
WHEELBASE (MM)	1058	1099
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350

TEAM 27.7

Gloss Brushed Alu / Rainbow Black

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
13" (XS)	8592842221382	
15.5" (S)	8592842221399	

SPECIFICATION

BASE INFO

WEIGHT	11.95 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu X6 Ultralite, Race Geometry, Integrated Cable Routing, BB92, SR dropout, Boost Thru axle 148x12mm, Inner cable routing.
SUSPENSION FORK	RockShox Judy Silver TK R, Tapered, SoloAir, 15x110mm axle, 100mm travel
BOTTOM BRACKET	SHIMANO BB-MT500PA, PressFit, shell 41x92mm
HEADSET	ACROS AZX-212 R5, ZS44/28.6 - ZS56/40
REAR AXLE	SB01, TA12x171.5, M12xP1.5x15.5L, Black

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO DEORE SL-M6100-IR, RAPIDFIRE Plus, 12-speed
REAR DERAILLEUR	SHIMANO SLX RD-M7100, Shadow Plus Design
CRANKSET	ONE Race, Alloy, 152mm, 32T
CASSETTE	SHIMANO DEORE CS-M6100, 12-speed, 10-51T
CHAIN	SHIMANO DEORE CN-M6100

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT410, hydraulic disc brake
ROTOR FRONT	SHIMANO SM-RT30, 160mm
BRAKE REAR	SHIMANO MT410, hydraulic disc brake
ROTOR REAR	SHIMANO SM-RT30, 160mm

WHEELS

HUB FRONT	SHIMANO HB-MT410-B, 28H, CL, 15x110mm, THRU Type AXLE
RIM FRONT	STARS J25DB, Tubeless, 28H
TIRE FRONT	Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
HUB REAR	SHIMANO FH-TC500-MS, 28H, CL, 12X142mm, THRU Type AXLE
RIM REAR	STARS J25DB, Tubeless, 28H
TIRE REAR	Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Mini Vivo
SEATPOST	ONE Race, Carbon, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	13" (XS)	15.5" (S)
BB DROP (MM)	40	40
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	545	586
STACK HEIGHT (MM)	562	562
REACH (MM)	384	425
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	420	420
HEAD TUBE LENGTH (MM)	90	90
WHEELBASE (MM)	1058	1099
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350

TEAM 27.3

Gloss Brushed Alu / Red

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
13" (XS)	8592842218610	
15,5" (S)	8592842218634	

SPECIFICATION

BASE INFO

WEIGHT	12.50 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
SUSPENSION FORK	SR Suntour XCR32, AHEAD 1-1/8", QR Type, 100mm travel
BOTTOM BRACKET HEADSET	Thun lbex, BSA ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6050-10R, SHORT REACH, RAPIDFIRE Plus, 10-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CUES CS-LG400, 10-speed, 11-48T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE Sport, 28H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J25DB, Tubeless, 28H
TIRE FRONT	Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
HUB REAR	ONE Sport, 28H, CL, M10x135, QR Type
RIM REAR	STARS J25DB, Tubeless, 28H
TIRE REAR	Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Mini Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	13" (XS)	15,5" (S)
BB DROP (MM)	45	45
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	547	586
STACK HEIGHT (MM)	567	567
REACH (MM)	384	423
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	432	432
HEAD TUBE LENGTH (MM)	90	90
WHEELBASE (MM)	1070	1109
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152

TEAM 27.3

Gloss Brushed Alu / Rainbow Black

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
13" (XS)	8592842217323	
15,5" (S)	8592842218627	

SPECIFICATION

BASE INFO

WEIGHT	12.50 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
SUSPENSION FORK	SR Suntour XCR32, AHEAD 1-1/8", QR Type, 100mm travel
BOTTOM BRACKET HEADSET	Thun lbex, BSA ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U6050-10R, SHORT REACH, RAPIDFIRE Plus, 10-speed
REAR DERAILLEUR	SHIMANO CUES RD-U6000, Shadow Plus Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CUES CS-LG400, 10-speed, 11-48T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE Sport, 28H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J25DB, Tubeless, 28H
TIRE FRONT	Schwalbe Racing Ray Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
HUB REAR	ONE Sport, 28H, CL, M10x135, QR Type
RIM REAR	STARS J25DB, Tubeless, 28H
TIRE REAR	Schwalbe Racing Ralph Performance, TwinSkin, TL-Ready, 27.5x2.25", ADDIX
SPOKES	SAPIM Laser/Race, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Mini Vivo
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black

GEOMETRY

FRAME SIZE	13" (XS)	15,5" (S)
BB DROP (MM)	45	45
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	547	586
STACK HEIGHT (MM)	567	567
REACH (MM)	384	423
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	432	432
HEAD TUBE LENGTH (MM)	90	90
WHEELBASE (MM)	1070	1109
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152

TEAM 24

Gloss Brushed Alu / Red

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
11"	8592842218276	

SPECIFICATION

BASE INFO

WEIGHT	10.70 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
SUSPENSION FORK	RST Aerial Air, 1-1/8", 60mm travel
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, SHORT REACH, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4010, Shadow Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J25D, Tubeless, 20H
TIRE FRONT	Schwalbe Rocket Ron Performance, 24x2.10", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J25D, Tubeless, 20H
TIRE REAR	Schwalbe Rocket Ron Performance, 24x2.10", ADDIX
SPOKES	SAPIM Laser, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	503
REACH (MM)	356
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	393
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	974
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300

TEAM 24

Gloss Brushed Alu / Rainbow Black

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
11"	8592842218269	

SPECIFICATION

BASE INFO

WEIGHT	10.70 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
SUSPENSION FORK	RST Aerial Air, 1-1/8", 60mm travel
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, SHORT REACH, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4010, Shadow Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J25D, Tubeless, 20H
TIRE FRONT	Schwalbe Rocket Ron Performance, 24x2.10", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J25D, Tubeless, 20H
TIRE REAR	Schwalbe Rocket Ron Performance, 24x2.10", ADDIX
SPOKES	SAPIM Laser, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	503
REACH (MM)	356
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	393
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	974
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300

TEAM 20

Gloss Brushed Alu / Red

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
9"	8592842217330	

SPECIFICATION

BASE INFO

WEIGHT	8.35 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CLARIS SL-R2000, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO CLARIS RD-R2000
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Alhonga, 140mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J25D, Tubeless, 20H
TIRE FRONT	Schwalbe Billy Bonkers Performance, 20x2.00", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J25D, Tubeless, 20H
TIRE REAR	Schwalbe Billy Bonkers Performance, 20x2.00", ADDIX
SPOKES	SAPIM Laser, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	332
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	332
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	40
CRANKSET (MM)	110
SEATPOST (MM)	200

TEAM 20

Gloss Brushed Alu / Rainbow Black

JUNIOR / TEAM



FRAME SIZE	EAN	Quantity
9"	8592842217347	

SPECIFICATION

BASE INFO

WEIGHT	8.35 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CLARIS SL-R2000, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO CLARIS RD-R2000
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Alhonga, 140mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J25D, Tubeless, 20H
TIRE FRONT	Schwalbe Billy Bonkers Performance, 20x2.00", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J25D, Tubeless, 20H
TIRE REAR	Schwalbe Billy Bonkers Performance, 20x2.00", ADDIX
SPOKES	SAPIM Laser, Stainless Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	332
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	332
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	40
CRANKSET (MM)	110
SEATPOST (MM)	200

F.L.Y. 27

Gloss Yellow

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
13" (XS)	8592842218016	
15,5" (S)	8592842218047	

SPECIFICATION

BASE INFO

WEIGHT	10.75 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, SHORT REACH, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4010, Shadow Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE Sport, 28H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 28H
TIRE FRONT	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
HUB REAR	ONE Sport, 28H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 28H
TIRE REAR	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 27"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	13" (XS)	15,5" (S)
BB DROP (MM)	50	50
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	545	586
STACK HEIGHT (MM)	516	516
REACH (MM)	397	438
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	432	432
HEAD TUBE LENGTH (MM)	100	100
WHEELBASE (MM)	1060	1101
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350



FRAME SIZE	EAN	Quantity
13" (XS)	8592842218023	
15,5" (S)	8592842218054	

SPECIFICATION

BASE INFO

WEIGHT	10.75 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, SHORT REACH, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4010, Shadow Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE Sport, 28H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 28H
TIRE FRONT	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
HUB REAR	ONE Sport, 28H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 28H
TIRE REAR	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 27"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	13" (XS)	15,5" (S)
BB DROP (MM)	50	50
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	545	586
STACK HEIGHT (MM)	516	516
REACH (MM)	397	438
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	432	432
HEAD TUBE LENGTH (MM)	100	100
WHEELBASE (MM)	1060	1101
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350

F.L.Y. 27

Gloss Purple

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
13" (XS)	8592842218030	
15,5" (S)	8592842218061	

SPECIFICATION

BASE INFO

WEIGHT	10.75 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, SHORT REACH, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4010, Shadow Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE Sport, 28H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 28H
TIRE FRONT	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
HUB REAR	ONE Sport, 28H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 28H
TIRE REAR	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 27"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	13" (XS)	15,5" (S)
BB DROP (MM)	50	50
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	545	586
STACK HEIGHT (MM)	516	516
REACH (MM)	397	438
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	432	432
HEAD TUBE LENGTH (MM)	100	100
WHEELBASE (MM)	1060	1101
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350



FRAME SIZE	EAN	Quantity
13" (XS)		
15,5" (S)		

SPECIFICATION

BASE INFO

WEIGHT	10.75 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO CUES SL-U4000-9R, SHORT REACH, RAPIDFIRE Plus, 9-speed
REAR DERAILLEUR	SHIMANO CUES RD-U4010, Shadow Design
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CUES CS-LG300, 9-speed, 11-36T
CHAIN	SHIMANO CN-LG500

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	ONE Sport, 28H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 28H
TIRE FRONT	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
HUB REAR	ONE Sport, 28H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 28H
TIRE REAR	Schwalbe Smart Sam Performance, 27.5x2.10", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 31.8mm
HANDLEBAR	ONE, Alloy, 20mm rise, 31.8mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 27"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	13" (XS)	15,5" (S)
BB DROP (MM)	50	50
SEAT TUBE LENGTH (MM)	330	393
EFFECTIVE TOP TUBE LENGTH (MM)	545	586
STACK HEIGHT (MM)	516	516
REACH (MM)	397	438
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	68°	68°
REAR CENTER (MM)	432	432
HEAD TUBE LENGTH (MM)	100	100
WHEELBASE (MM)	1060	1101
STEM (MM)	50	50
HANDLEBAR (MM)	620	620
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350



FRAME SIZE	EAN	Quantity
11"	8592842217354	

SPECIFICATION

BASE INFO

WEIGHT	9.20 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Alhonga, 140mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 20H
TIRE FRONT	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 20H
TIRE REAR	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300



FRAME SIZE	EAN	Quantity
11"	8592842217361	

SPECIFICATION

BASE INFO

WEIGHT	9.20 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Alhonga, 140mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 20H
TIRE FRONT	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 20H
TIRE REAR	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300



FRAME SIZE	EAN	Quantity
11"	8592842217972	

SPECIFICATION

BASE INFO

WEIGHT	9.20 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm

LOAD CAPACITY	60 kg
---------------	-------

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Alhonga, 140mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 20H
TIRE FRONT	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 20H
TIRE REAR	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300



FRAME SIZE	EAN	Quantity
11"		

SPECIFICATION

BASE INFO

WEIGHT	9.20 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, Disc Brake Flat mount
FORK	Alloy 6061 T6, Advanced Junior, Disc Brake Flat mount
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Alhonga HJ-372F, hydraulic disc brake
ROTOR FRONT	Alhonga, 140mm
BRAKE REAR	Alhonga HJ-372F, hydraulic disc brake
ROTOR REAR	Alhonga, 140mm

WHEELS

HUB FRONT	ONE Sport, 20H, Disc, M9x100mm, QR Type
RIM FRONT	STARS J20S, Disc, 20H
TIRE FRONT	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
HUB REAR	ONE Sport, 20H, CL, M10x135, QR Type
RIM REAR	STARS J20S, Disc, 20H
TIRE REAR	Schwalbe Billy Bonkers Performance, 24x2.00", ADDIX
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300

F.L.Y. 24 VB

Gloss Yellow

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
11"	8592842217989	

SPECIFICATION

BASE INFO

WEIGHT	9.80 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
HUB REAR	ONE Sport, 24H, M10x130, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300

F.L.Y. 24 VB

Matte Teal

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
11"	8592842217996	

SPECIFICATION

BASE INFO

WEIGHT	9.80 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
HUB REAR	ONE Sport, 24H, M10x130, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300

F.L.Y. 24 VB

Gloss Purple

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
11"	8592842218009	

SPECIFICATION

BASE INFO

WEIGHT	9.80 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
HUB REAR	ONE Sport, 24H, M10x130, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300

F.L.Y. 24 VB

Gloss Mint

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
11"		

SPECIFICATION

BASE INFO

WEIGHT	9.80 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ACERA RD-M3020
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
HUB REAR	ONE Sport, 24H, M10x130, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 24x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	470
REACH (MM)	365
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	391
HEAD TUBE LENGTH (MM)	100
WHEELBASE (MM)	968
STEM (MM)	40
CRANKSET (MM)	127
SEATPOST (MM)	300

F.L.Y. 20 VB

Gloss Yellow

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
9"	8592842217378	

SPECIFICATION

BASE INFO

WEIGHT	7.95 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	microSHIFT TS39-7R, ThumpTap, 7-speed
REAR DERAILLEUR	SHIMANO TOURNEY RD-TY200
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO CS-HG200, 7-speed, 12-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 20H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 20H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
HUB REAR	ONE Sport, 20H, M10x130, QR Type
RIM REAR	STARS J19SZ, 20H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	332
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	332
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	40
CRANKSET (MM)	110
SEATPOST (MM)	200

F.L.Y. 20 VB

Matte Teal

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
9"	8592842217958	

SPECIFICATION

BASE INFO

WEIGHT	7.95 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	microSHIFT TS39-7R, ThumpTap, 7-speed
REAR DERAILLEUR	SHIMANO TOURNEY RD-TY200
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO CS-HG200, 7-speed, 12-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 20H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 20H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
HUB REAR	ONE Sport, 20H, M10x130, QR Type
RIM REAR	STARS J19SZ, 20H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	332
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	332
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	40
CRANKSET (MM)	110
SEATPOST (MM)	200

F.L.Y. 20 VB

Gloss Purple

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
9"	8592842217965	

SPECIFICATION

BASE INFO

WEIGHT	7.95 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	microSHIFT TS39-7R, ThumpTap, 7-speed
REAR DERAILLEUR	SHIMANO TOURNEY RD-TY200
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO CS-HG200, 7-speed, 12-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 20H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 20H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
HUB REAR	ONE Sport, 20H, M10x130, QR Type
RIM REAR	STARS J19SZ, 20H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	332
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	332
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	40
CRANKSET (MM)	110
SEATPOST (MM)	200

F.L.Y. 20 VB

Gloss Mint

JUNIOR / F.L.Y.



FRAME SIZE	EAN	Quantity
9"		

SPECIFICATION

BASE INFO

WEIGHT	7.95 kg
--------	---------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, Inner cable routing, V-Brake mount
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	microSHIFT TS39-7R, ThumpTap, 7-speed
REAR DERAILLEUR	SHIMANO TOURNEY RD-TY200
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO CS-HG200, 7-speed, 12-32T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 20H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 20H
TIRE FRONT	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
HUB REAR	ONE Sport, 20H, M10x130, QR Type
RIM REAR	STARS J19SZ, 20H
TIRE REAR	Schwalbe CX Comp, KevlarGuard, 20x1.75", Reflective tape
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm
HANDLEBAR	ONE Alloy, 25mm rise, 25.4mm
GRIPS LEFT	ONE Kids, Lock-On
GRIPS RIGHT	ONE Kids, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	332
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	332
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	40
CRANKSET (MM)	110
SEATPOST (MM)	200

RACER 27

Gloss Racing Red

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
13" (XS)	8592842218306	
15.5" (S)	8592842218313	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
SUSPENSION FORK	SR Suntour XCT30, 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	Thun lbex, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ALTUS RD-M310-L
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J20S, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 27.5x2.10
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J20S, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 27.5x2.10
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Alloy, 34mm rise, 25.4mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 27"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	13" (XS)	15.5" (S)
BB DROP (MM)	40	40
SEAT TUBE LENGTH (MM)	343	393
EFFECTIVE TOP TUBE LENGTH (MM)	547	586
STACK HEIGHT (MM)	566	566
REACH (MM)	383	424
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	69°	69°
REAR CENTER (MM)	435	435
HEAD TUBE LENGTH (MM)	90	90
WHEELBASE (MM)	1064	1104
STEM (MM)	35	35
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350

RACER 27

Matte Radioactive Yellow

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
13" (XS)	8592842218344	
15.5" (S)	8592842218658	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
SUSPENSION FORK	SR Suntour XCT30, 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	Thun lbex, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ALTUS RD-M310-L
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J20S, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 27.5x2.10
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J20S, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 27.5x2.10
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Alloy, 34mm rise, 25.4mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 27"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	13" (XS)	15.5" (S)
BB DROP (MM)	40	40
SEAT TUBE LENGTH (MM)	343	393
EFFECTIVE TOP TUBE LENGTH (MM)	547	586
STACK HEIGHT (MM)	566	566
REACH (MM)	383	424
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	69°	69°
REAR CENTER (MM)	435	435
HEAD TUBE LENGTH (MM)	90	90
WHEELBASE (MM)	1064	1104
STEM (MM)	35	35
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350

RACER 27

Gloss Grey

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
13" (XS)		
15.5" (S)		

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	75 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
SUSPENSION FORK	SR Suntour XCT30, 1-1/8", Coil, QR Type, 100mm travel
BOTTOM BRACKET	Thun lbex, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO ALTUS SL-M315-8R, RAPIDFIRE Plus, 8-speed
REAR DERAILLEUR	SHIMANO ALTUS RD-M310-L
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 152mm, 30T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	SHIMANO MT200, hydraulic disc brake
ROTOR FRONT	Rotor 160mm
BRAKE REAR	SHIMANO MT200, hydraulic disc brake
ROTOR REAR	Rotor 160mm

WHEELS

HUB FRONT	SHIMANO HB-QC300, 32H, CL, M9X100mm, QR Type
RIM FRONT	STARS J20S, Disc, 32H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 27.5x2.10
HUB REAR	SHIMANO FH-QC300-HM, 32H, CL, M10X135mm, QR Type
RIM REAR	STARS J20S, Disc, 32H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 27.5x2.10
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Alloy, 34mm rise, 25.4mm
GRIPS LEFT	ONE Sport, Lock-On
GRIPS RIGHT	ONE Sport, Lock-On

PARTS

SADDLE	Selle Royal Explora Junior 27"
SEATPOST	ONE Sport, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	Bearing Pedals with reflector, PP Body

GEOMETRY

FRAME SIZE	13" (XS)	15.5" (S)
BB DROP (MM)	40	40
SEAT TUBE LENGTH (MM)	343	393
EFFECTIVE TOP TUBE LENGTH (MM)	547	586
STACK HEIGHT (MM)	566	566
REACH (MM)	383	424
SEAT TUBE ANGLE	74°	74°
HEAD TUBE ANGLE	69°	69°
REAR CENTER (MM)	435	435
HEAD TUBE LENGTH (MM)	90	90
WHEELBASE (MM)	1064	1104
STEM (MM)	35	35
CRANKSET (MM)	152	152
SEATPOST (MM)	350	350

RACER 24

Gloss Racing Red

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
11"	8592842218283	

SPECIFICATION

BASE INFO

WEIGHT	10.85 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
SUSPENSION FORK	SR Suntour XCT JR24, 1-1/8", Soft Spring, QR Type, 50mm travel
BOTTOM BRACKET HEADSET	Thun Ibox, BSA ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SL-RV400-8R, REVOSHIFT, 8-speed
REAR DERAILLEUR	SHIMANO TOURNEY TX RD-TX800
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe Billy Bonkers, KevlarGuard, 24x2.00
HUB REAR	ONE Sport, 24H, M10x135, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe Billy Bonkers, KevlarGuard, 24x2.00
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Alloy, 25.4mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	469
REACH (MM)	357
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	390
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	974
STEM (MM)	35
HANDLEBAR (MM)	540
CRANKSET (MM)	127
SEATPOST (MM)	300

RACER 24

Matte Radioactive Yellow

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
11"	8592842218290	

SPECIFICATION

BASE INFO

WEIGHT	10.85 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
SUSPENSION FORK	SR Suntour XCT JR24, 1-1/8", Soft Spring, QR Type, 50mm travel
BOTTOM BRACKET HEADSET	Thun Ibox, BSA ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SL-RV400-8R, REVOSHIFT, 8-speed
REAR DERAILLEUR	SHIMANO TOURNEY TX RD-TX800
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe Billy Bonkers, KevlarGuard, 24x2.00
HUB REAR	ONE Sport, 24H, M10x135, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe Billy Bonkers, KevlarGuard, 24x2.00
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Alloy, 25.4mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	469
REACH (MM)	357
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	390
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	974
STEM (MM)	35
HANDLEBAR (MM)	540
CRANKSET (MM)	127
SEATPOST (MM)	300

RACER 24

Gloss Grey

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
11"		

SPECIFICATION

BASE INFO

WEIGHT	10.85 kg
--------	----------

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	60 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
SUSPENSION FORK	SR Suntour XCT JR24, 1-1/8", Soft Spring, QR Type, 50mm travel
BOTTOM BRACKET HEADSET	Thun IbeX, BSA ONE CH919TBW, 1-1/8"

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SL-RV400-8R, REVOSHIFT, 8-speed
REAR DERAILLEUR	SHIMANO TOURNEY TX RD-TX800
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 127mm, 28T
CASSETTE	SHIMANO CS-HG31, 8-speed, 11-34T
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe Billy Bonkers, KevlarGuard, 24x2.00
HUB REAR	ONE Sport, 24H, M10x135, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe Billy Bonkers, KevlarGuard, 24x2.00
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Alloy, 25.4mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 24"
SEATPOST	ONE, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	11"
BB DROP (MM)	45
SEAT TUBE LENGTH (MM)	280
EFFECTIVE TOP TUBE LENGTH (MM)	500
STACK HEIGHT (MM)	469
REACH (MM)	357
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	68°
REAR CENTER (MM)	390
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	974
STEM (MM)	35
HANDLEBAR (MM)	540
CRANKSET (MM)	127
SEATPOST (MM)	300

RACER 20

Gloss Racing Red

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
9"	8592842218320	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SL-RV200-7R, REVOSHIFT, 7-speed
REAR DERAILLEUR	SHIMANO TOURNEY RD-TY200
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO MF-TZ500, 7-speed, 14-28T, Freewheel
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 20X1.90", Active Line
HUB REAR	ONE Sport, 24H, Freewheel, M10x135, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 20X1.90", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Hi-ten, 25.4mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	331
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	330
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	35
HANDLEBAR (MM)	500
CRANKSET (MM)	110
SEATPOST (MM)	230

RACER 20

Matte Radioactive Yellow

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
9"	8592842218337	

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SL-RV200-7R, REVOSHIFT, 7-speed
REAR DERAILLEUR	SHIMANO TOURNEY RD-TY200
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO MF-TZ500, 7-speed, 14-28T, Freewheel
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 20X1.90", Active Line
HUB REAR	ONE Sport, 24H, Freewheel, M10x135, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 20X1.90", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Hi-ten, 25.4mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	331
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	330
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	35
HANDLEBAR (MM)	500
CRANKSET (MM)	110
SEATPOST (MM)	230

RACER 20

Gloss Grey

JUNIOR / RACER



FRAME SIZE	EAN	Quantity
9"		

SPECIFICATION

ISO AND EN NORM

ISO norm	ISO 4210-2 Young Adult
EN norm	EN17406 Condition 2 For on and Off-Road riding and drops less than 15cm
LOAD CAPACITY	45 kg

FRAMESET

FRAME	Alu 6061 T6 Double Butted, Advanced Junior Geometry, 1xOptimized, BB BSA, SR dropout,
FORK	Alloy 6061 T6, Advanced Junior, V-Brake
BOTTOM BRACKET	Thun Topaz, BSA
HEADSET	ONE CH919TBW, 1-1/8

DRIVETRAIN

SHIFTERS RIGHT	SHIMANO SL-RV200-7R, REVOSHIFT, 7-speed
REAR DERAILLEUR	SHIMANO TOURNEY RD-TY200
CRANKSET	ONE Sport, Alloy, Narrow/Wide, 110mm, 28T
CASSETTE	SHIMANO MF-TZ500, 7-speed, 14-28T, Freewheel
CHAIN	KMC Z8.3

BRAKING SYSTEM

BRAKE FRONT	Tektro, V-Brake, Alloy
BRAKE REAR	Tektro, V-Brake, Alloy

WHEELS

HUB FRONT	ONE Sport, 24H, M9x100mm, QR Type
RIM FRONT	STARS J19SZ, 24H
TIRE FRONT	Schwalbe Smart Sam, KevlarGuard, 20X1.90", Active Line
HUB REAR	ONE Sport, 24H, Freewheel, M10x135, QR Type
RIM REAR	STARS J19SZ, 24H
TIRE REAR	Schwalbe Smart Sam, KevlarGuard, 20X1.90", Active Line
SPOKES	SAPIM Galvanized Black
NIPPLES	SAPIM, Brass

COCKPIT

STEM	ONE, Alloy, 25.4mm, 15°
HANDLEBAR	ONE Hi-ten, 25.4mm
GRIPS LEFT	ONE Junior Grip
GRIPS RIGHT	ONE Junior Grip

PARTS

SADDLE	Selle Royal Explora Junior 20"
SEATPOST	ONE, Alloy, 27.2mm
SEATPOST CLAMP	ONE CC-610, 31.8mm, with Quick Release level, Black
PEDALS	VP Components VPE-229, Junior Platform Pedals

GEOMETRY

FRAME SIZE	9"
BB DROP (MM)	35
SEAT TUBE LENGTH (MM)	230
EFFECTIVE TOP TUBE LENGTH (MM)	450
STACK HEIGHT (MM)	413
REACH (MM)	331
SEAT TUBE ANGLE	74°
HEAD TUBE ANGLE	67°
REAR CENTER (MM)	330
HEAD TUBE LENGTH (MM)	90
WHEELBASE (MM)	844
STEM (MM)	35
HANDLEBAR (MM)	500
CRANKSET (MM)	110
SEATPOST (MM)	230

superior.

BIKE FUN International s.r.o.
Areál Tatry 1445/2, 742 21 Kopřivnice, Czech Republic
e-mail: info@bikefunint.com, www.bikefunint.com



www.superiorbikes.com



[superior_bikes](https://www.instagram.com/superior_bikes)



[SuperiorBikesOfficial](https://www.facebook.com/SuperiorBikesOfficial)